




The ATLAS Read-Out System

Performance with first data and perspective for the future


A. Misiejuk¹, G. Crone², D. Della Volpe³, B. Gorini⁴, B. Green¹, **M. Joos**⁴, G. Kieft⁵, K. Kordas⁸, A. Kugel⁶, N. Schroer⁶, P. Teixeira-Dias¹, L. Tremblet⁴, J. Vermeulen⁵, F. Wickens⁷, P. Werner⁴

¹Royal Holloway University of London, ²University College London, ³Universita & INFN, Napoli, ⁴CERN, ⁵Nikhef, Amsterdam, ⁶Ruprecht-Karls-Universitaet Heidelberg, ⁷Rutherford Appleton Laboratory, ⁸University Bern

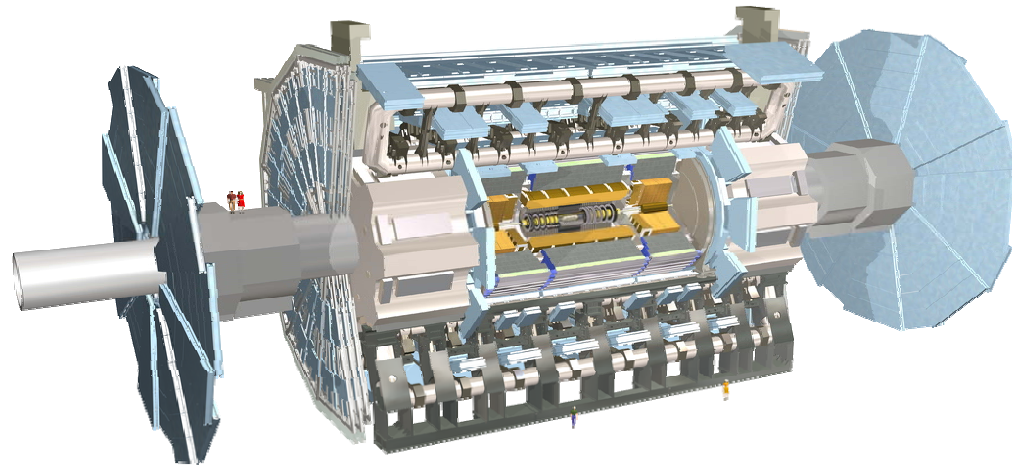



System Overview

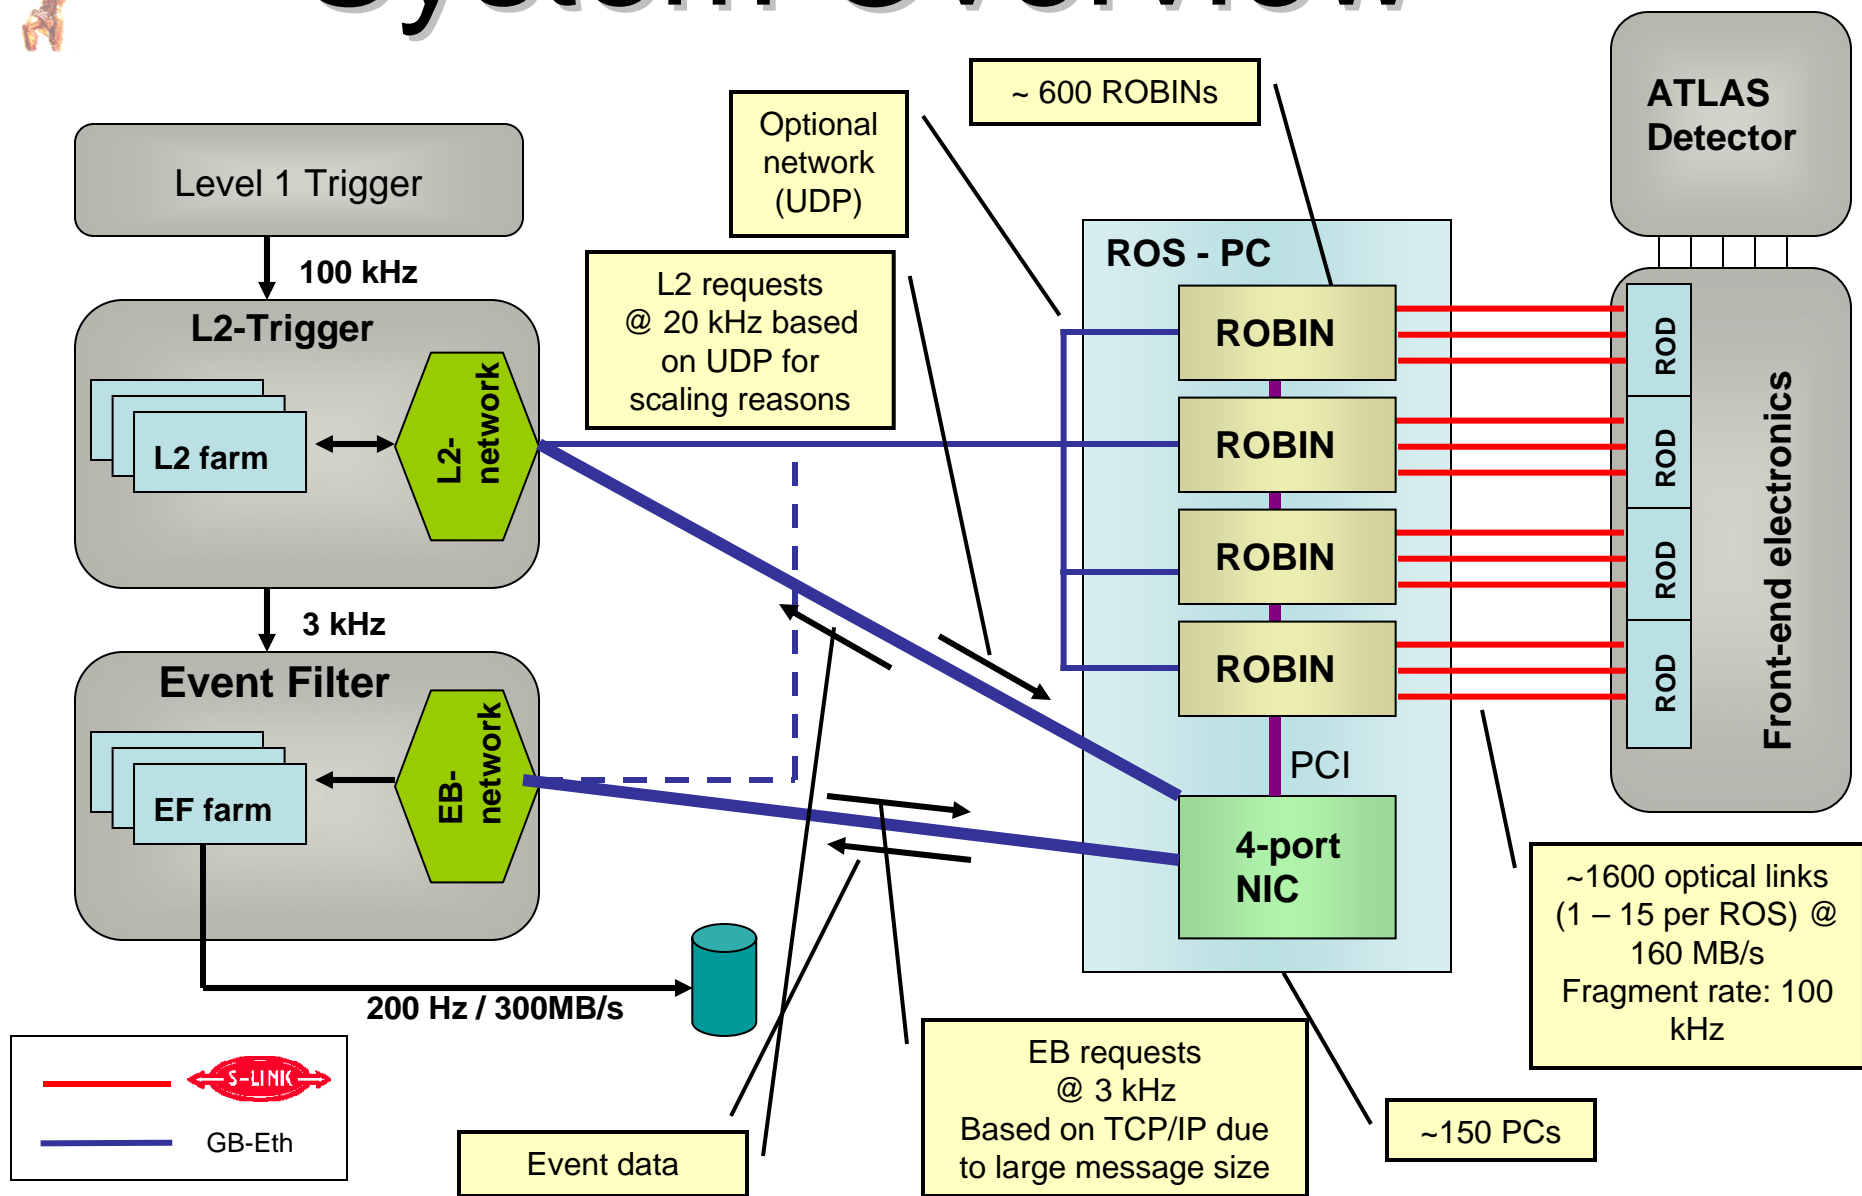




Building blocks

The ReadOut System (ROS) PC

- Houses 1 to 5 ROBIN cards (typically 4 cards)
- Configures and controls the ROBINS
- Reads data from the ROBINS and provides it to the Second-Level Trigger and to the Event Builder
- Receives clear requests for event fragments and forwards them to the ROBINS
- Interfaces to the operational and physics monitoring systems


The ROBIN PCI card

- Receives event fragments from sub-detector specific front-end electronics (RODs) via 3 optical links
- Buffers events during the decision latency of the Second-Level Trigger and the time required for building of events accepted by L2
- The optical link is based on the S-LINK interface: 32 bit @ 40MHz = 160 MB/s

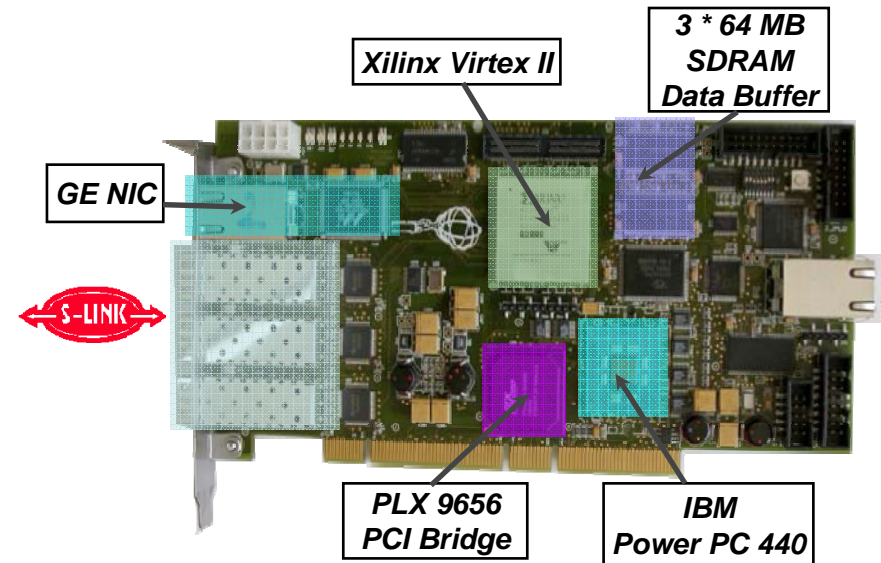



Hardware Components

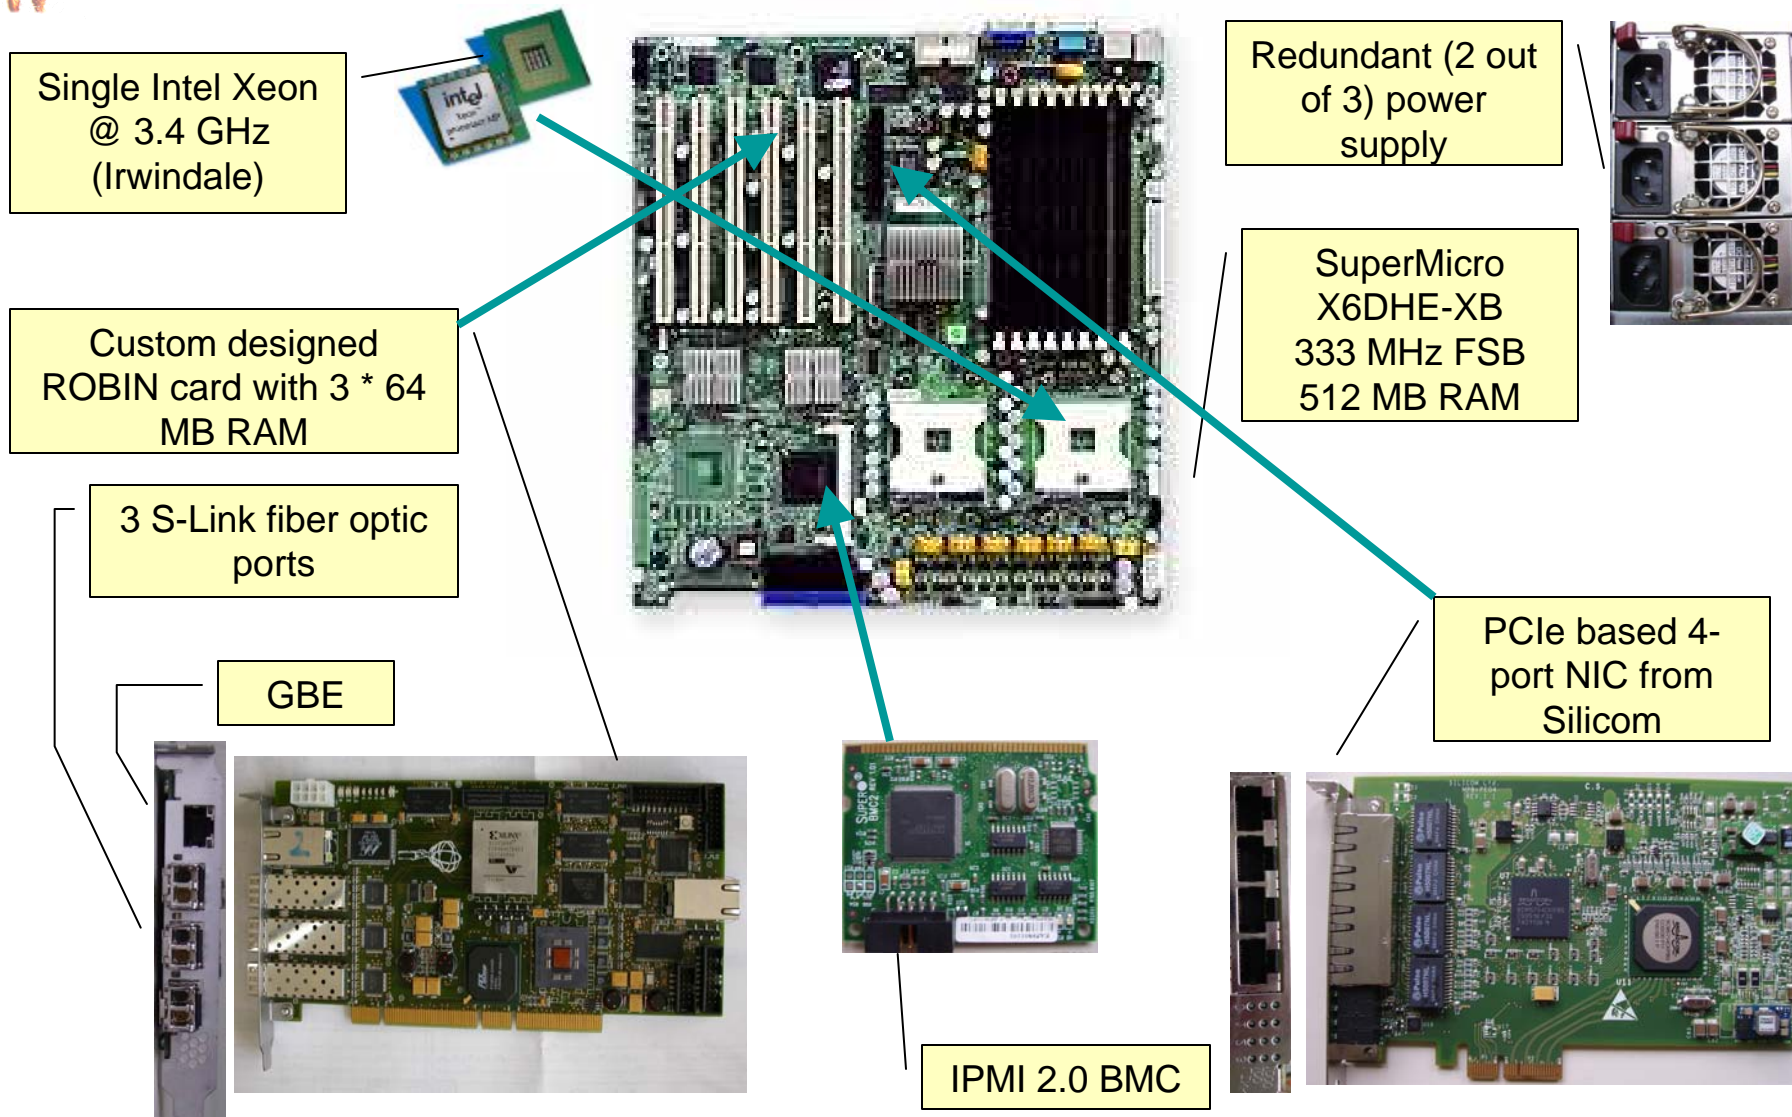



Hardware Components



68 ROS PC (liquid
Argon sub detector)

15/07/2006



Operational Monitoring

System status

Service Status Details For Host 'pc-til-ros-lbc-01'


Host	Service	Status	Last Check	Duration	Attempt	Status Information
pc-til-ros-lbc-01	12V_VOLTAGE	OK	02-06-2009 10:59:42	31d 22h 30m 4s	1/3	Measurement ok: sensor_value=12.080, sensor_value_min=13.355, sensor_value_max=10.635
	12V_VOLTAGE	OK	02-06-2009 10:59:42	31d 22h 29m 55s	1/3	Measurement ok: sensor_value=12.017, sensor_value_min=10.675, sensor_value_max=13.359
	3.3V_VOLTAGE	OK	02-06-2009 10:59:43	31d 22h 29m 37s	1/3	Measurement ok: sensor_value=3.200, sensor_value_min=3.1, sensor_value_max=3.5
	5V_VOLTAGE	OK	02-06-2009 11:00:46	31d 22h 29m 19s	1/3	Measurement ok: sensor_value=5.022, sensor_value_min=4.455, sensor_value_max=5.562
	MAIL_RESTRICTION	OK	02-06-2009 11:00:46	0d 12h 19m 26s	1/3	OK! File is 8 minutes old
	AUTOFS_STATUS	OK	02-06-2009 10:50:52	0d 12h 57m 54s	1/3	CONFIGURED: [--verbose] [--verbose] [inet] [--verbose] [atlas-home] [db_old] [/shared] [panasas/info] [panasas/panfs] [panasas/info] [panasas/panfs] ACTIVE: [--verbose] [inet] [--verbose] [atlas-home] [db_old] [/shared] [panasas/info] [panasas/panfs] [panasas/info] [panasas/panfs] STATUS_OK: 11 ac
	BWM_VERSION	OK	02-06-2009 10:55:54	0d 15h 57m 24s	1/3	Client up to date:V5.02 - 270808-09.43
	CEU	OK	02-06-2009 10:50:52	0d 13h 55m 7s	1/3	CORES: 0 12.50% 1 13.50% all: 12.75%
	CEU1_FAN_SPEED	OK	02-06-2009 10:55:52	31d 22h 32m 45s	1/3	Measurement ok: sensor_value=3915, sensor_value_min=3500, sensor_value_max=7600
	CEU1_TEMPERATURE	OK	02-06-2009 10:55:52	31d 22h 32m 32s	1/3	Measurement ok: sensor_value=27, sensor_value_min=0, sensor_value_max=50
	FAN1_SPEED	OK	02-06-2009 10:55:51	31d 22h 32m 5s	1/3	Measurement ok: sensor_value=2970, sensor_value_min=500, sensor_value_max=25000
	FANH_SPEED	OK	02-06-2009 10:55:51	31d 22h 31m 57s	1/3	Measurement ok: sensor_value=3105, sensor_value_min=500, sensor_value_max=25000
	FANS_SPEED	OK	02-06-2009 10:55:52	31d 22h 31m 35s	1/3	Measurement ok: sensor_value=2565, sensor_value_min=500, sensor_value_max=25000
	INTERFACE_UP	OK	02-06-2009 11:05:21	0d 0h 17m 10s	1/3	ic1 UP (rx=0.0KBps/out=0.0KBps), ct00 UP (rx=0.3KBps/out=0.1KBps), dc1 UP (rx=0.0KBps/out=0.0KBps), dc2 UP (rx=0.0KBps/out=0.0KBps), 4 UP: OK
	KERNEL_VERSION	OK	02-06-2009 10:54:22	0d 15h 57m 24s	1/3	2.6.9-55.EL.cemamp
	MEM	OK	02-06-2009 11:00:31	14d 2h 10m 15s	1/3	Real Memory: 77%used(289MB/374MB) (<98%) - OK
	PING	OK	02-06-2009 11:05:21	0d 15h 47m 59s	1/3	PING OK - Packet loss = 0%, RTA = 0.15 ms
	POWER_SUPPLY_STATUS	OK	02-06-2009 10:59:42	31d 22h 30m 4s	1/3	Check ok: Power supply OK 0
	RAMDISK_STATUS	OK	02-06-2009 11:00:52	0d 15h 57m 26s	1/3	/: 77%used(48MB/62MB) (<98%) - OK
	SERVER_NAME	OK	02-06-2009 10:54:22	0d 15h 57m 24s	1/3	pc-tdq-lfs-12
	SSH_CONNECTION	OK	02-06-2009 11:00:46	0d 15h 57m 24s	1/3	SSH OK - OpenSSH_4.3 (protocol 1.99)
	SSH_USERS	OK	02-06-2009 11:00:53	0d 15h 47m 59s	1/3	. 0 user, System UpTime is 31 days, 23 01:12
	SYSTEM_TEMPERATURE	OK	02-06-2009 10:55:51	31d 22h 33m 42s	1/3	Measurement ok: sensor_value=25, sensor_value_min=0, sensor_value_max=50
	TIME_SYNCHRONISATION	OK	02-06-2009 11:00:53	0d 4h 47m 23s	1/3	OK level
	VMETD	OK	02-06-2009 10:55:52	0d 14h 41m 8s	1/3	OK level: 0 0 0 0 5666

- Lowest level: IPMI & ssh
- Server level: Nagios
- User level: Web browser


Features:

- History charts
- Automatic E-mail notification in case of problems

System temperature

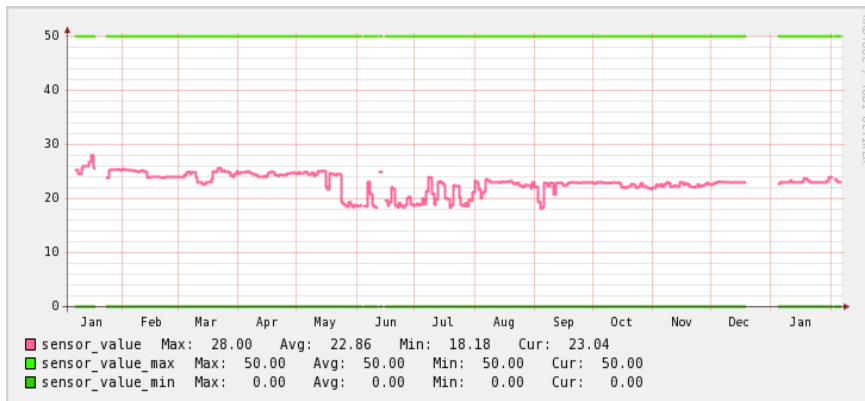

Fan speed

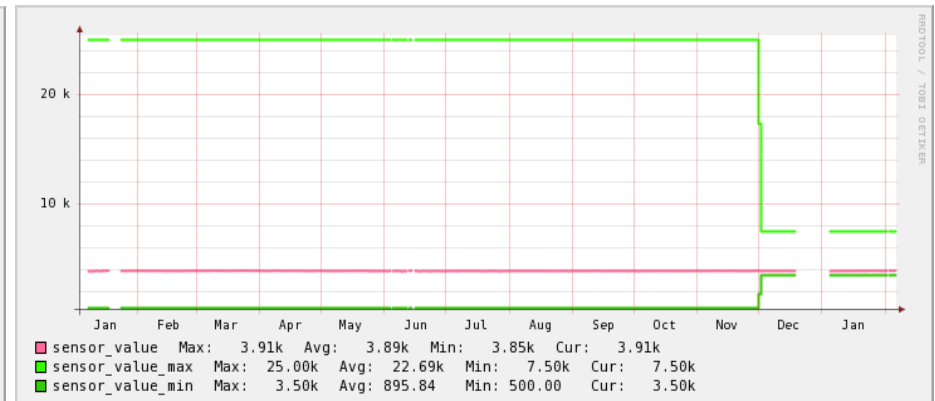



Hardware reliability


Type of component	Number of installed units	Number of broken units	Failures per year [%]	Failures in 2008
PC Motherboard	150	3	0.77	1
CPU	150	1	0.26	0
Memory DIMM	300	3	0.39	1
Power Supply module	450	4	0.34	1
IPMI BMC	150	4	1.03	0
CPU ventilator	150	2	0.51	0
chassis ventilator	450	1	0.09	0
4-port NIC	150	1	0.26	1
ROBIN cards - broken	614	23	1.45	1
ROBIN cards – intermittent errors (Firmware issues)	614	36	2.26	15

Average age of the hardware: 2.6 years



System integration issues

- The individual PSUs of the PCs generate a significant inrush current peak when power is restored after a power cut
- This may cause breakers in the rack to trip
- First solution: Power staggering barrettes
 - But recent questions on long-term reliability
- So now plan second solution
 - Thermistors

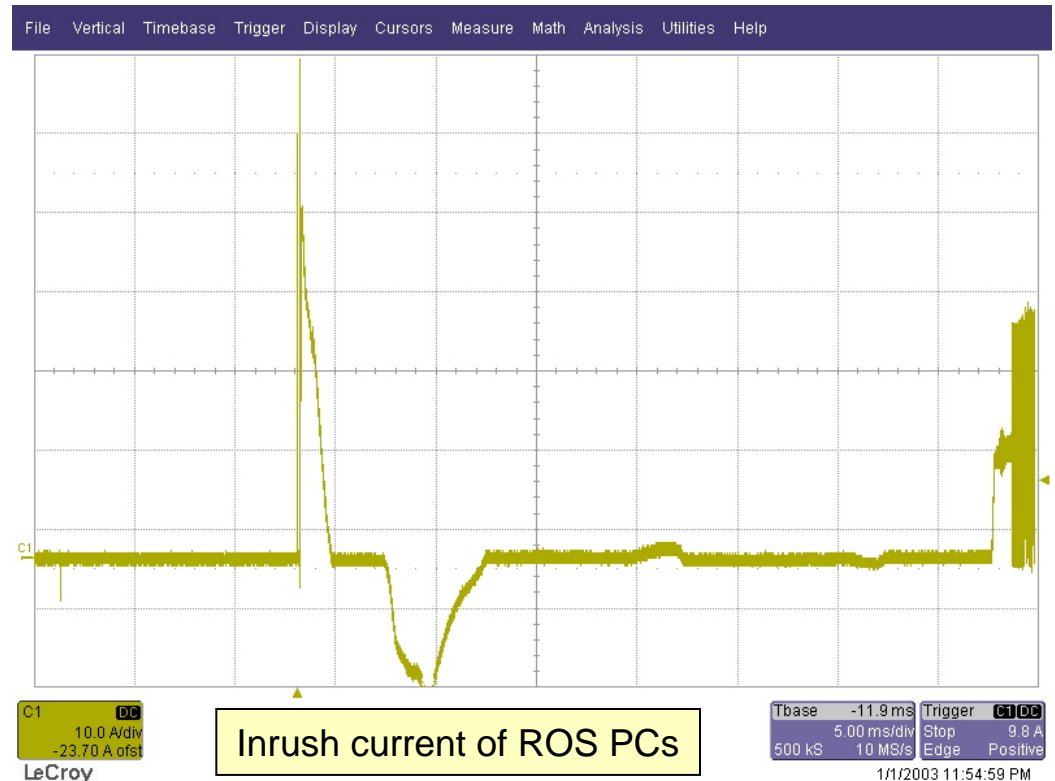

Power staggering barrette




ROS software Architecture

The application retrieves data fragments from the ROBINS, combines them in a unique fragment and sends it to L2/EB


Multi-threaded C++ program running under Linux (SLC4)

ROS Application

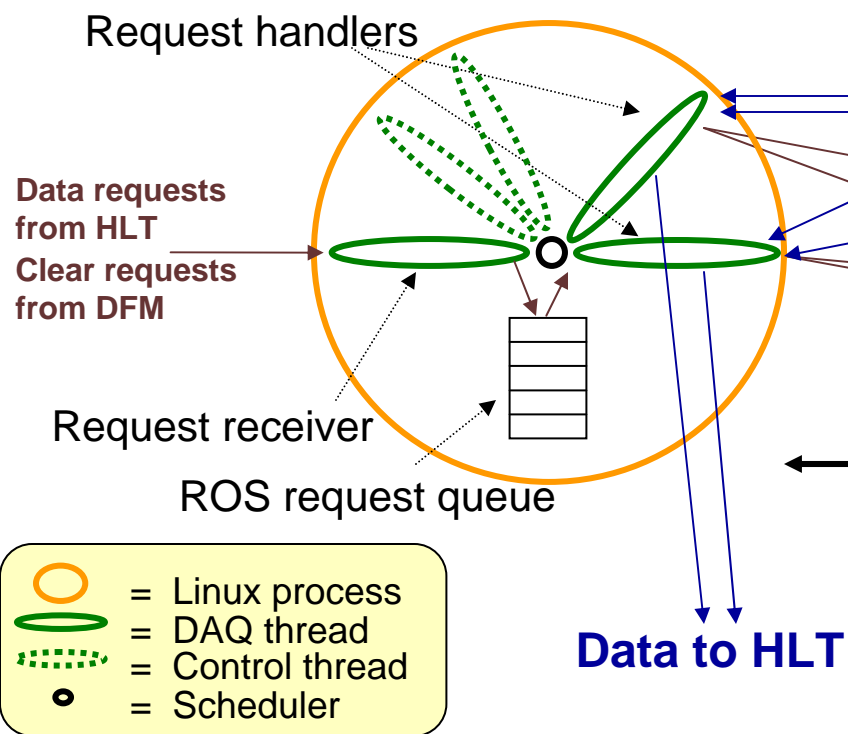

PowerPC processor in ROBIN runs C program booted from FLASH memory


Data from detector

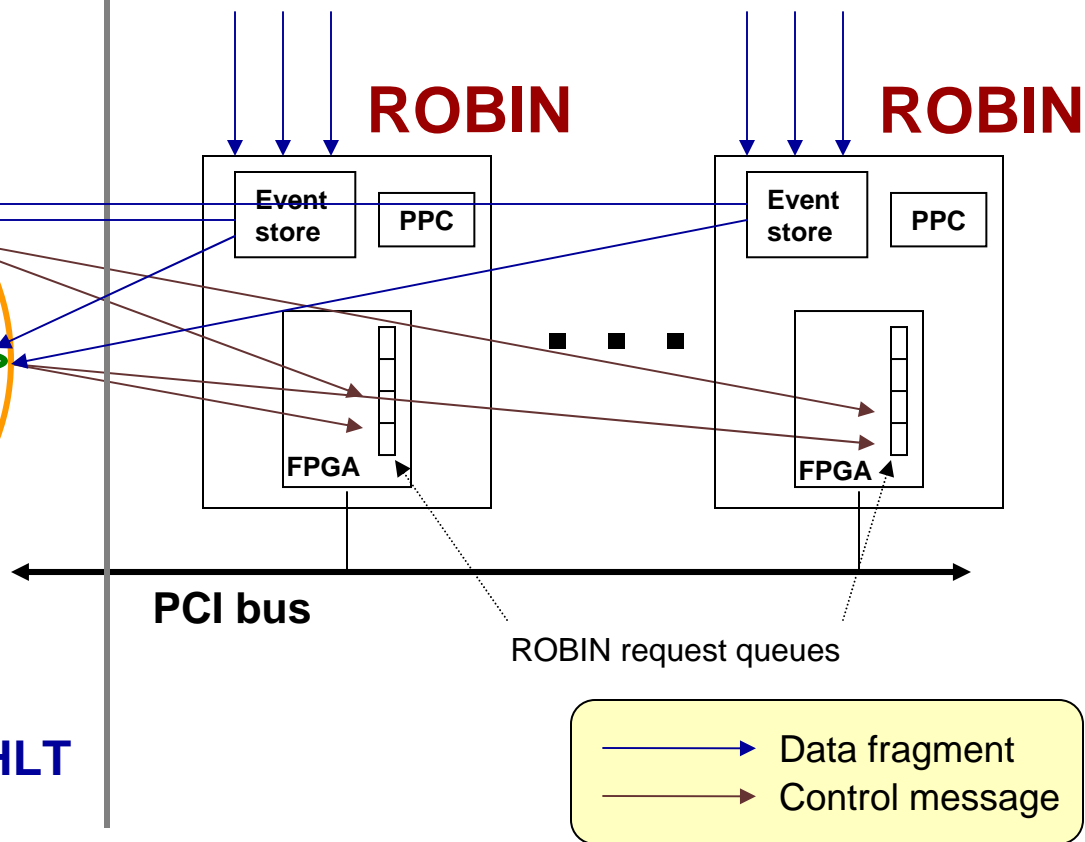




System performance in 2008

- The ROS PCs were powered almost permanently
- Most of the time they were used for data taking with a trigger on cosmic events
- ROS data output statistics for August to October:
 - ~900 TB of data
- All detectors were commissioned at full S-Link (ROD-ROS) speed
- During selected periods high-rate tests were performed with pre-loaded data (ROBIN not involved)
 - 136 ROS PCs delivered **5.3 GB/s** to HLT (40 MB/s/ROS)

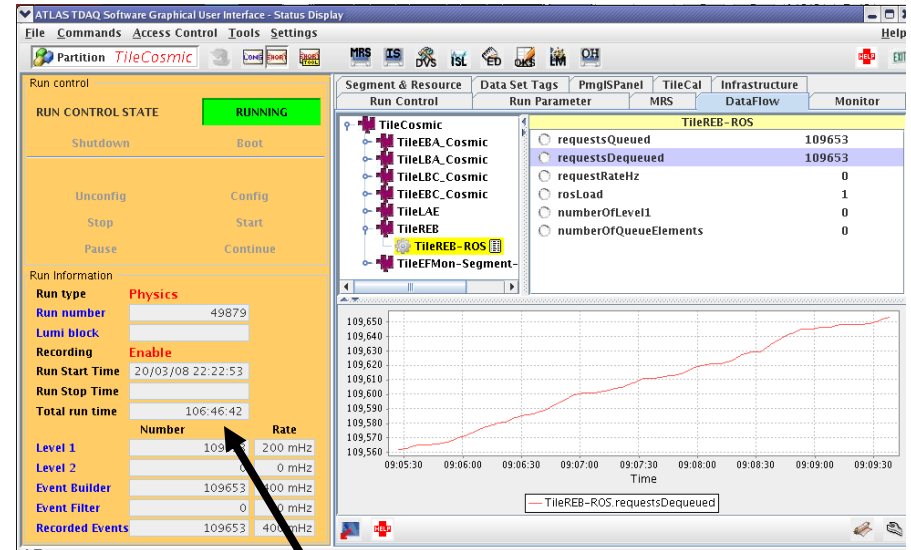

A continuous run of more than 4 days

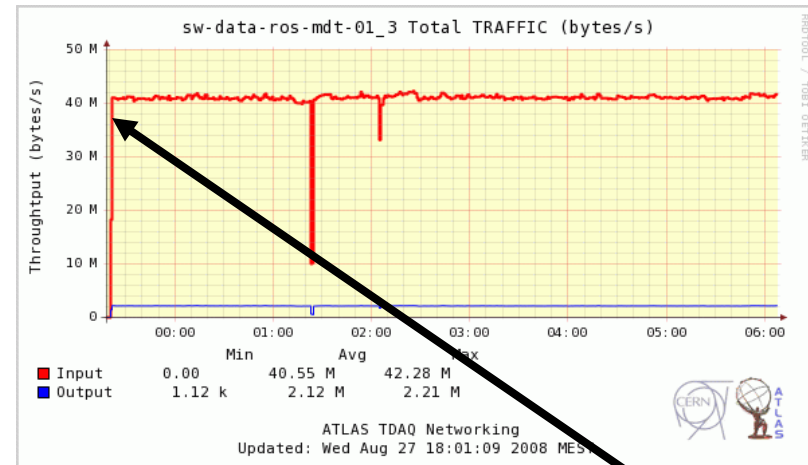


Output of ROS to HLT during high rate test; 40 MB/s



Performance of the standard ROS


Test Setup

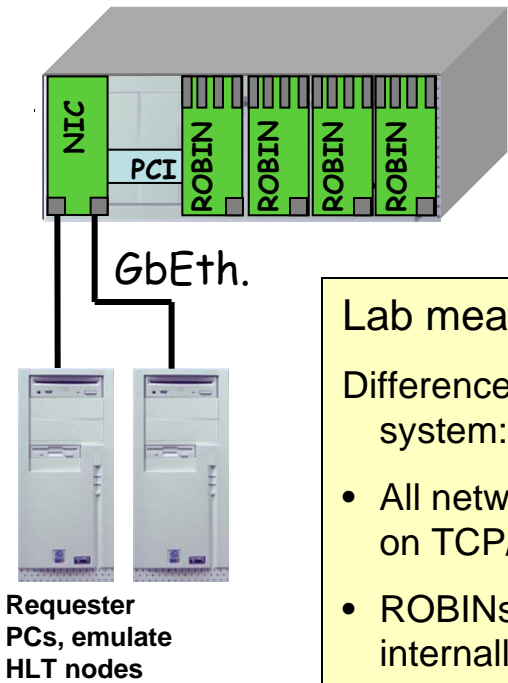

Lab measurement

Differences wrt deployed system:

- All network traffic based on TCP/IP
- ROBINS generate data internally

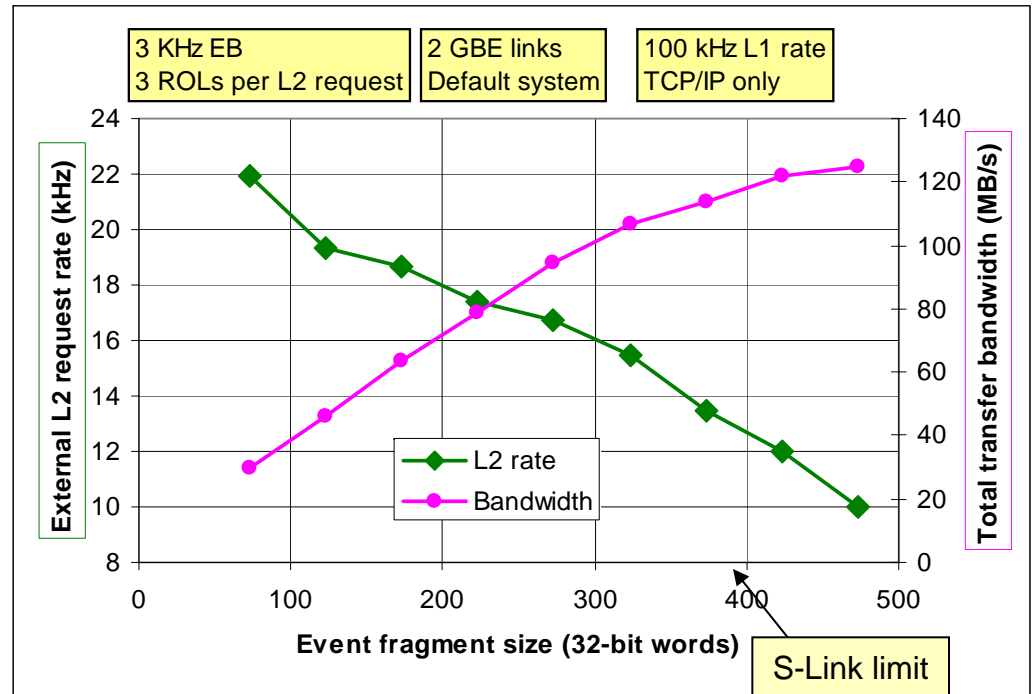


- Canonical fragment size in ATLAS: ~ 1 kByte (256 words)
- Meets the original requirements (~20 kHz L2 rate) for small fragment sizes
- Too slow for large fragments
- Bottleneck seems to be the ROS CPU (ROBINS & NICs can sustain much higher rates)



Performance of the optimized ROS

The original configuration of the OS & drivers turned out to be inefficient. Finally we obtained the best performance by:

- Turning hyperthreading off
- Using a uni-processor kernel
- Tuning the interrupt coalescence of the network driver
- Changing the SELinux configuration

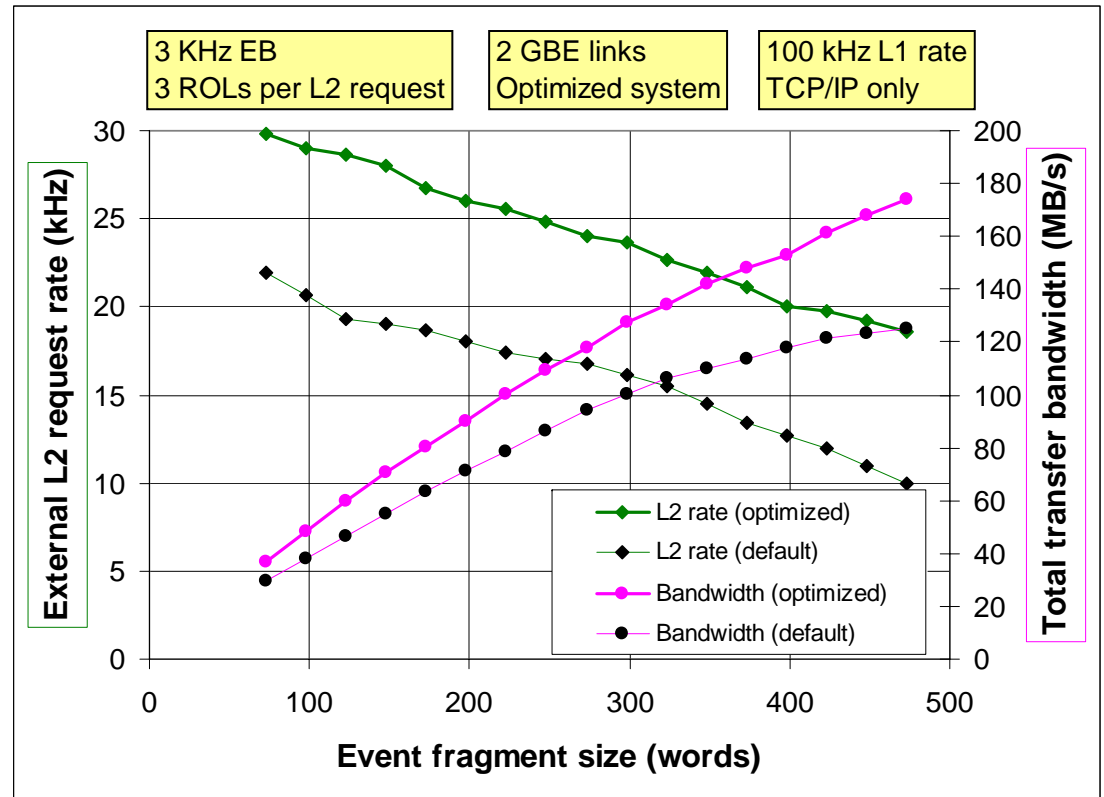

- Performance is now OK for all fragment sizes
- However would like more headroom



Higher ROS performance - motivation

- ATLAS (upgrade) phases
 - Phase 0 (until 2013, luminosity: up to $1 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$)
 - Need more ROS performance to:
 - have headroom for ROS PCs with high L2 request rates
 - compensate for higher rates due to modified thresholds of the L2 trigger
 - allow for additional bandwidth-demanding types of triggers. E.g.:
 - » Inner detector full scan for b-physics
 - » Calorimeter full scan for missing E_T
 - Phase 1 (2013 – 2017, luminosity: up to $3 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$)
 - Higher data rates due to increased luminosity
 - Still use (current) ROS PCs & ROBINS
 - Requires more network bandwidth (switches, ROBINS & ROS)
 - Phase 2 (from 2018, luminosity: up to $10 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$)
 - Much higher data rates
 - Replace ROS system



Higher ROS performance - options

(for phase 0 & 1)

- The main bottleneck of the ROS is the network interface to the HLT
 - Only 2 GBE links per ROS
 - Network protocol (mix of UDP and TCP/IP) handled by the CPU of the ROS PC
- 3 approaches to solve the network limitation


Install smart NICs (to offload CPU from the TCP/IP protocol)

Replace the motherboard, CPU and memory of the ROS PCs with faster hardware and connect additional GBE lines from the ROS PCs to the HLT network

Connect the ROBINS directly to the HLT network



Chelsio S320E
2-port smart NIC

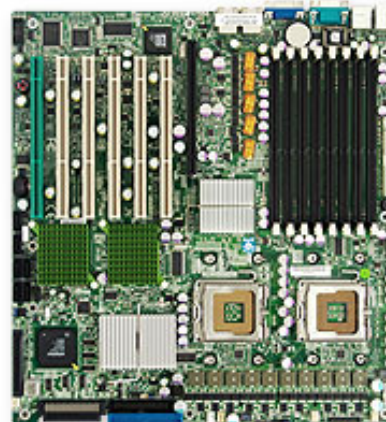

SuperMicro X7DB8-X MB
with 2 * 2.66 GHz quad core
Xeon and RAM @ 667 MHz

This may be one of the last
MBs with >3 64bit PCI slots
-> Development of PCIe
based ROBIN started

GBE port of
ROBIN (UDP
only)






Impact of the Smart NIC




Laboratory measurement
• TCP/IP only

- No significant gain in performance
- Driver for smart NIC not yet tuned for best performance (waiting for optimized driver from manufacturer)
- More work required but overall potential seems to be low

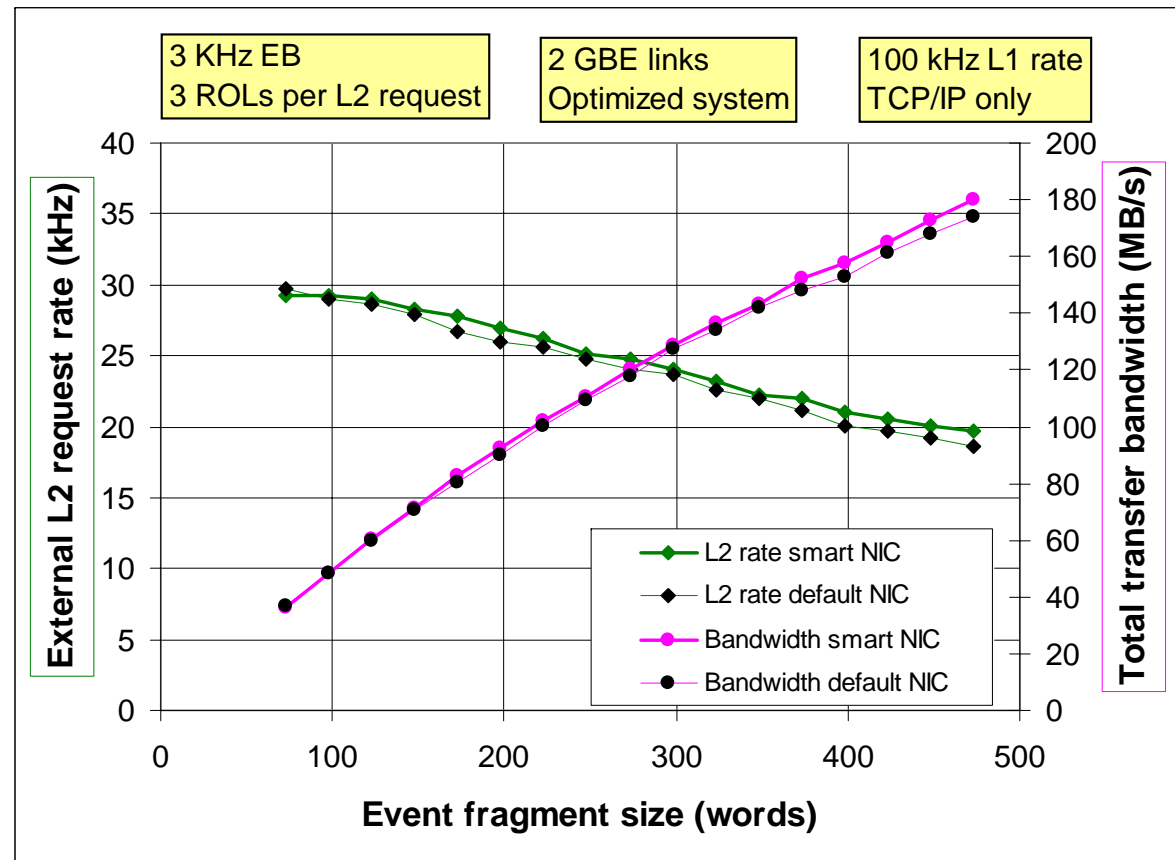



Impact of faster MB, CPU & RAM

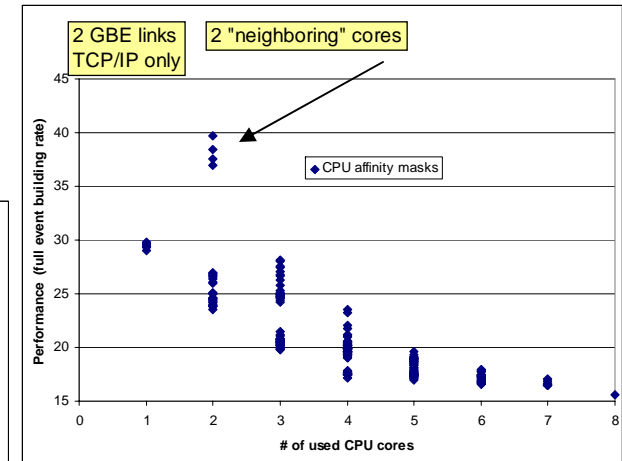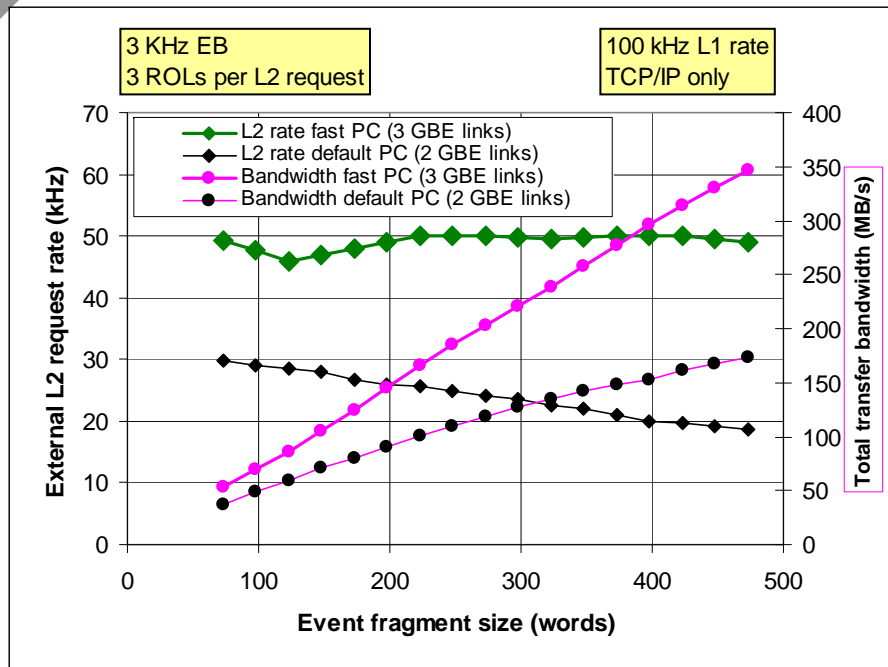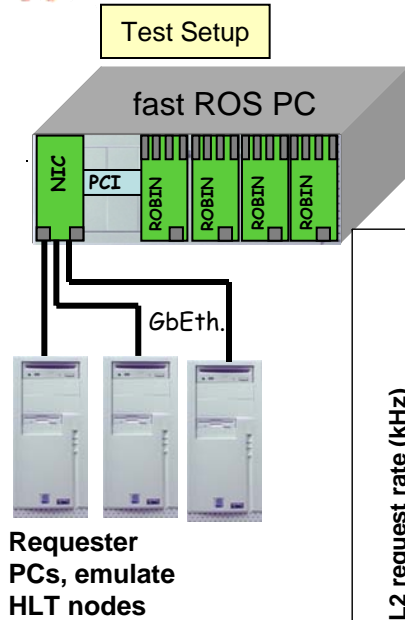


Best performance with 2 (of 8) cores
 -> effect of (extensive) use of mutexes?

- L2 request rate (almost) fragment size independent
- L2 request rate increases by 50% to 150%
- (expensive) ROBIN cards can be reused




Impact of Read-Out via PC & ROBIN cards

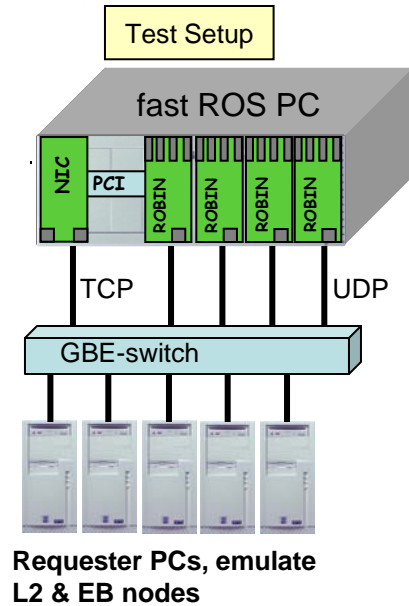

Full system test with (small HLT) farm
Only preliminary results so far

- Functionality OK
- current test system limits performance

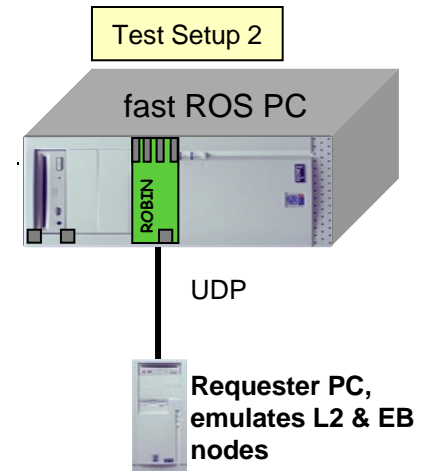

Simplified set-up for tests at the ROBIN level

- This ROS configuration has the potential to deliver more performance than the ROS with the faster motherboard & CPU
- Further optimization of the system (software) required



Summary and Conclusions

- Since its installation in 2006/2007 the ROS system has worked very reliably
- The ROS in its current configuration meets the requirements that were specified in the ATLAS Technical Design Report
- Several alternatives exist for the further improvement of the performance
 - More detailed tests have to be carried out in the deployed system to better understand the relative advantages and disadvantages of these alternatives
- The development of a PCIe based ROBIN has been started
 - Because motherboards with at least 4 64-bit PCI slots become difficult to find
 - Faster PPC CPU will also improve ROBIN performance
- Based on today's understanding of the ATLAS TDAQ (HLT rejection factor and algorithms) as well as the planned upgrades of ATLAS and LHC the current ROS architecture fulfills the requirements of phase 0 & 1 of ATLAS