

Vector Magnetometry Using Shallow Implanted NV Centers in Diamond with Waveguide-Assisted Dipole Excitation and Readout

Sajede Shahbazi,¹ Giulio Coccia,² Johannes Lang,¹ Vibhav Bharadwaj,^{1,3} Fedor Jelezko,^{1,4} Roberta Ramponi,² Anthony J. Bennett,^{5,6} John P. Hadden,^{5,6} Shane M. Eaton,² and Alexander Kubanek^{1,4, a)}

¹⁾*Institute for Quantum Optics, Ulm University, D-89081 Ulm, Germany*

²⁾*Institute for Photonics and Nanotechnologies (IFN) - CNR, Piazza Leonardo da Vinci, 32, Milano 20133, Italy*

³⁾*Department of Physics, Indian Institute of Technology Guwahati, 781039 Guwahati, Assam, India*

⁴⁾*Center for Integrated Quantum Science and Technology (IQst), Ulm University, Ulm D-89081, Germany*

⁵⁾*School of Engineering, Cardiff University, Queen's Building, The Parade, Cardiff, CF24 3AA, UK*

⁶⁾*Translational Research Hub, Cardiff University, Maindy Road, Cardiff, CF24 4HQ, United Kingdom*

(Dated: July 29, 2024)

On-chip magnetic field sensing with Nitrogen-Vacancy (NV) centers in diamond requires scalable integration of 3D waveguides into diamond substrates. Here, we develop a sensing array device with an ensemble of shallow implanted NV centers integrated with arrays of laser-written waveguides for excitation and readout of NV signals. Our approach enables an easy-to-operate on-chip magnetometer with a pixel size proportional to the Gaussian mode area of each waveguide. The performed continuous wave optically detected magnetic resonance on each waveguide gives an average dc-sensitivity value of $(195 \pm 3) \text{ nT}/\sqrt{\text{Hz}}$, which can be improved with lock-in-detection or pulsed-microwave sequences. We apply a magnetic field to separate the four NV crystallographic orientations of the magnetic resonance and then utilize a DC current through a straight wire antenna close to the waveguide to prove the sensor capabilities of our device. We reconstruct the complete vector magnetic field in the NV crystal frame using three different NV crystallographic orientations. By knowing the polarization axis of the waveguide mode, we project the magnetic field vector into the lab frame.

^{a)}Corresponding author: alexander.kubanek@uni-ulm.de

I. INTRODUCTION

Negatively charged Nitrogen-Vacancy (NV) centers in diamond have attracted significant attention for their remarkable potential in quantum sensing, imaging, and quantum information processing¹⁻⁴. In quantum sensing, ensembles of NV centers are a promising platform for continuously sensing static and low-frequency magnetic fields⁵ and their chemical inertness enables direct physical contact with delicate biological systems⁶. Additionally, shallow-implanted NV centers, created via ion implantation⁷ or thin film growth⁸, enhance sensitivity by placing them in close proximity to samples. Another advantage of using NV ensembles is the ability to measure the projection of the magnetic field along each of the four distinct NV symmetry axes to form a 3D vector field⁹.

Integrating photonics to address large ensembles of NV centers presents significant advantages, optimizing the scalability and efficiency of these quantum systems^{10,11}. A promising integrated platform is laser written waveguides in diamond¹²⁻¹⁴. These waveguides are generated using tightly focused femtosecond laser pulses, creating polarized single-mode waveguide intersecting with the shallow-implanted NV centers. Our integration approach combines shallow-implanted NV ensemble with laser-written waveguides inside diamond, forming a two-dimensional sensing array. This technique enables control over the light propagation path, facilitating excitation and fluorescence detection from a large ensemble of NV centers¹⁵. The excitation and fluorescence collection of an ensemble of shallow-implanted NV centers via laser-written waveguides offers a pathway toward scalable, efficient, and easy-to-use quantum sensing devices.

The paper is structured as follows. In Section II A, we characterize the shallow implanted NV centers using a home-built confocal microscope. We calculate the magnetic field sensitivity and coherence properties of the NVs by conducting continuous wave optically detected magnetic resonance (CW-ODMR) and pulsed measurements. We then characterize the sensitivity performance using waveguide-assisted ODMR. In Section II B, to demonstrate the sensing capabilities of our NV centers via the waveguides, we apply an external DC current and measure the resonance shift in the ODMR spectrum. For reconstruction of the magnetic vector field, we use three different NV crystallographic orientations and, by knowing the waveguide's polarization axis, we derive the full vector field in both the crystal frame and the lab frame. We describe the experimental setup in Section III and conclude in Section IV.

II. EXPERIMENT

A. NV ensemble characterization

The diamond is a type-IIa electronic-grade slab ($2\text{ mm} \times 2\text{ mm} \times 0.5\text{ mm}$) with the surface cut along (100) and the side facets along (110). The type-II waveguides are created using femtosecond pulsed laser at $\lambda = 515\text{ nm}$ with a repetition rate of 500kHz. The laser beam is focused into the sample with a high-numerical-aperture (NA) objective (1.25 NA, 100 \times), creating waveguide sidewalls with cross section of approximately $5\text{ }\mu\text{m}$ transversely and $20\text{ }\mu\text{m}$ vertically with 2 mm length according to the size of the diamond. Using three different powers of laser at 30, 40, and 50 mW, creates waveguide arrays at three different depths (40, 75 and $110\text{ }\mu\text{m}$) from the surface. The waveguide walls are separated by $13\text{ }\mu\text{m}$ optimized for single mode guiding of NV spectrum emission from 630 to 800nm. This waveguide geometry results in a Gaussian mode when coupling to the waveguide. Afterward, we shallowly implant the NV ensemble on the diamond's side facet (110) with an implantation depth 8-12 nm below the surface. (See Section III for additional information regarding the fabrication method and experimental setup.)

We first characterize the NV ensemble sensitivity performance and coherence properties in a confocal microscope using CW-ODMR and pulsed sequences. CW-ODMR is a simple and powerful technique in which a continuous microwave is swept over the spin resonance of one or multiple NV centers while the response can be read out optically. The microwave signal is applied to the sample via a straight copper wire of $20\text{ }\mu\text{m}$ diameter. For fluorescence collection, we employ a high-NA objective (0.95 NA, 100 \times) with a diffraction limited resolution of 340 nm. Figure 1(a) shows a confocal image of the diamond (110) side facet where the NVs are shallowly implanted. In the region shown in Figure 1(a), there are no waveguides, letting us characterize the NV's properties without strain effects induced by the waveguides¹⁶.

A photon shot-noise-limited sensitivity for an ensemble of NVs using CW-ODMR is given by¹⁷:

$$\eta_{\text{cw}} = \frac{4}{3\sqrt{3}} \frac{\Delta\nu}{\gamma C \sqrt{N}} \quad (1)$$

with $\frac{4}{3\sqrt{3}}$ a prefactor for a Lorentzian fitting ODMR for the maximum slope, $\Delta\nu$ the linewidth, $\gamma = 2\pi \times 28\text{ GHzT}^{-1}$ the electron spin gyromagnetic ratio, C the contrast and N the fluorescence count rate. The minimum achievable linewidth, $\Delta\nu \approx \frac{1}{\pi T_2^*}$, is limited by the coherence time, T_2^* , of

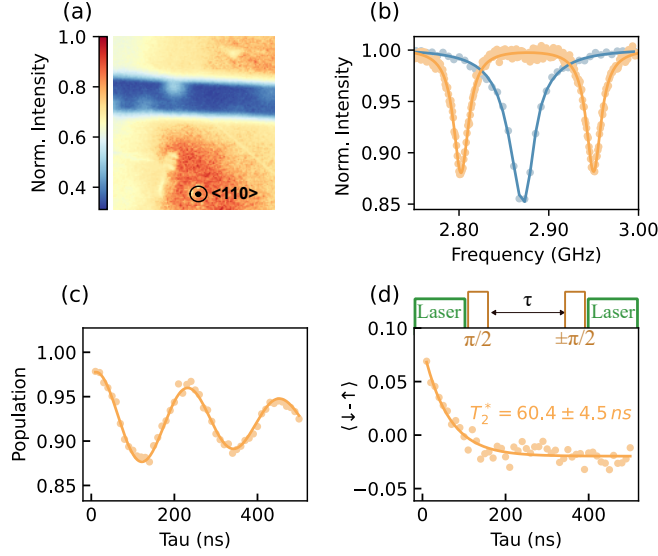


Figure 1. **Testing NV-based sensing via confocal free-space access.** (a) Confocal image of the shallow implanted NV ensemble. The shaded area is a straight copper wire that applies the MW field to the NVs. (b) CW-ODMR in confocal with (orange) and without (blue) an external B-field. The scattered data points are fitted with a single (blue) and double (orange) Lorentzian function. (c) Rabi oscillation between $m_s = 0$ and $m_s = +1$ at 2.95 GHz microwave resonance frequency. The Rabi oscillation has a (4.54 ± 0.03) MHz frequency (from fitting) and a lifetime of (570 ± 50) ns. (d) The Ramsey free induction decay with 111 ns $\pi/2$ time gives a dephasing time of $T_2^* = (60.4 \pm 4.5)$ ns corresponding to optimal sensing time. The schematic of the pulse sequence can be seen on top of the graph.

the NV electron spin¹⁷.

The CW-ODMR spectrum at zero external magnetic field shown in Figure 1(b) with a single Lorentzian profile with the resonance frequency of 2.87 GHz, yields a sensitivity value of $32 \text{ nT}/\sqrt{\text{Hz}}$ using Eq. (1). By applying an external magnetic field, we split the resonance frequency of $m_s = \pm 1$ states and see two resonance dips separated by 148 MHz due to the Zeeman effect (Figure 1(b)). We then perform Rabi driving between $m_s = 0$ and $m_s = +1$ states at resonance frequency 2.95 GHz shown in Figure 1(c). The Rabi oscillation has a 4.5 MHz frequency with contrast and lifetime of $(11.9 \pm 0.5)\%$ and (570 ± 50) ns, respectively. The Ramsey free induction decay with the Rabi period of 222 ns gives a $T_2^* = (60.4 \pm 4.5)$ ns (Figure 1(d)). We attribute the fast dephasing time to the high concentration of implanted NVs and dipole interaction among the centers themselves¹⁸ and the strain effect due to the proximity of NVs to the surface¹⁹. Ramsey measurements on NV- centers distant from the waveguide resulted in comparable coherence

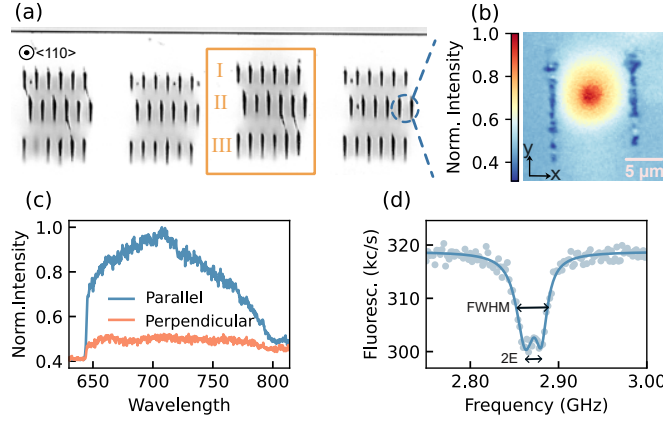


Figure 2. **Characterization of the laser written waveguide arrays and their sensing performance.** (a) Microscope image of a 2D waveguide array looking at the surface where the NV centers are implanted. For the waveguide set marked with an orange box, the dc-sensitivity values derived from Eq. (1) are shown in Table I in the main text. (b) Confocal image of a single waveguide with a laser coupled to the waveguide mode depicting a Gaussian mode with $1/e^2$ area of $456 \mu\text{m}^2$. The y -axis is along the polarization axis of the waveguide. (c) The NV PL spectrum through excitation and detection via a waveguide with light's polarization parallel (blue) and perpendicular (orange) to the polarization axis of the waveguide mode. (d) Waveguide-assisted CW-ODMR from one of the studied waveguides.

times, indicating that the waveguide-induced strain does not have a significant contribution to the coherence time, in agreement with Ref.²⁰. Another decoherence mechanism is the inhomogeneity of the MW field, which can be improved by using an omega microwave structure.

Table I. B-field sensitivity in ($\text{nT}/\sqrt{\text{Hz}}$) for the marked waveguide (WG) set in Figure 2.

row	WG1	WG2	WG3	WG4	WG5
I	338 ± 17	370 ± 20	130 ± 5	141 ± 5	145 ± 5
II	278 ± 20	208 ± 15	260 ± 12	180 ± 9	213 ± 11
III	79 ± 4	90 ± 4	129 ± 8	182 ± 10	179 ± 8

Next, we investigate the waveguide sensing properties by coupling the excitation and detection of NV fluorescence into the waveguides and performing CW-ODMR. The primary differences between confocal and waveguide-assisted sensing lie in the mode volume, the number of NV centers, and the excitation power. Waveguide-assisted ODMR excites NV centers within a $1/e^2$ Gaussian mode area of $456 \mu\text{m}^2$, resulting in a larger number of NV centers contributing to the ODMR sig-

nal compared to the confocal excitation area of $0.366 \mu\text{m}^2$. Consequently, higher excitation power is required in waveguide-assisted sensing to excite the larger mode area compared to confocal microscopy efficiently.

Figure 2(a) presents a microscope image of an array of studied waveguides on the (110) side facet of the diamond, where the NV centers are implanted. A 532 nm laser is coupled from the opposite side facet of the diamond using a low NA (0.25 NA, 10 \times) objective to excite the waveguide mode. The light travels through the waveguide to reach the facet with the implanted NV centers. The fluorescence signal then travels back through the waveguide and is collected using the same objective as for the excitation. Figure 2(b) displays the Gaussian mode of one of the studied waveguides, which has a $1/e^2$ area of $456 \mu\text{m}^2$, corresponding to the NV excitation area. To ensure proper excitation and detection through the waveguide, we rotate a half-wave plate (HWP) in the excitation path and examine the NV's fluorescence spectrum [see Figure 2(c)]. It can be seen that when the laser polarization is perpendicular to the y -axis (parallel to waveguide side-walls), the signal is minimally guided through the waveguide. Upon confirming proper excitation via the waveguides, we perform CW-ODMR on various waveguides, with one example shown in Figure 2(d). The sensitivity values for the set of waveguides marked in Figure 2(a) are presented in Table I, ranging from 79 to $370 \text{ nT}/\sqrt{\text{Hz}}$. The average sensitivity across all the waveguides is $(195 \pm 3) \text{ nT}/\sqrt{\text{Hz}}$, with a standard deviation of $85 \text{ nT}/\sqrt{\text{Hz}}$. This variation is attributed to differences in waveguide losses and the varying coupling efficiency of the NV dipoles to the waveguide mode.

B. DC current vector sensing

To benchmark the sensitivity performance of the waveguide array, a DC current is sent through a copper wire to the sample. Figure 3(a) shows one of the studied waveguides in the confocal scan near the copper wire. According to Biot-Savart law, the magnetic field generated by a constant electric current I is:

$$\vec{B} = \frac{\mu_0}{4\pi} \int \frac{\vec{I} \times \hat{r}}{r^2} dl \quad (2)$$

with vacuum magnetic permeability of $\mu_0 = 4\pi \times 10^{-7} \text{ T/A}$

The center of the waveguide mode is at a distance (r) of $27 \mu\text{m} \pm 5.5 \mu\text{m}$ from the center of the wire. The large uncertainty is due to the waveguide mode area. Assuming a current of $I = 1 \text{ mA}$,

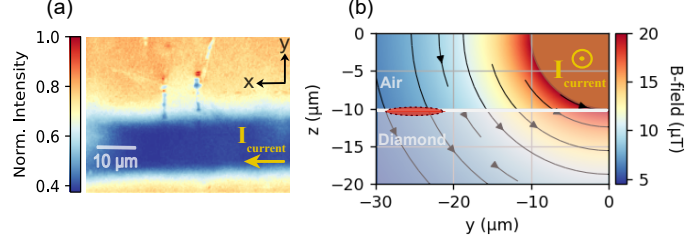


Figure 3. **Magnetic field vector on one studied waveguide by applying a DC current.** (a) Confocal image of one of the studied waveguides. The strip line area is the copper wire (as in Figure 2a) for applying the MW field and the DC-current. The x -axis is in the direction of the current flow. (b) magnetic field vector simulation (using Eq. (2)) from a DC carried by a $20\ \mu\text{m}$ diameter wire. The y and z -axis shows the distance from the center of the wire carrying current along the x -axis. The red area with a dashed line is where the waveguide mode is, and $z = -10\ \mu\text{m}$ is the (110) surface of the diamond with the shallow implanted NVs a few nanometers below the surface.

the magnetic field from Eq. (2) gives a value of $\sim 7.43\ \mu\text{T} \pm 2.3\ \mu\text{T}$. In Figure 3(b), we map the magnetic field vector near the wire to determine the expected value using Eq. (2).

To investigate the DC current value and determine the vector field from the current, we measure CW-ODMR with an external magnetic field such that its projection on each NV orientation varies. This variation allows us to differentiate the contributions from the distinct NV crystallographic orientations and provides a mapping of the vector magnetic field generated by the DC current. Figure 4(a) shows the ODMR spectra for four different currents, each displaying six distinct resonance dips. These dips correspond to the three different orientations of nitrogen-vacancy (NV) centers, labeled as $\text{NV}_{1,2,3}$.

To estimate the B-field projection per 1 mA on each NV axis, the resonance shift value of $m_s = -1$ state for $\text{NV}_{1,2,3}$ are depicted in Figure 4(b). From the linear fits, the slope values $\alpha_{1,2,3}$ are extracted, yielding $(-68.0 \pm 5.4)\ \text{kHz/mA}$, $(66.0 \pm 9.5)\ \text{kHz/mA}$ and $(74.0 \pm 6.4)\ \text{kHz/mA}$, respectively. Using the formula $\delta\nu = \gamma B_z$ with B_z the projection of the B-field on NV-axis, these slopes corresponds to magnetic field values of $(2.43 \pm 0.19)\ \mu\text{T/mA}$, $(2.36 \pm 0.34)\ \mu\text{T/mA}$ and $(2.64 \pm 0.23)\ \mu\text{T/mA}$.

Now, to fully characterize the B-field magnitude and orientation, we employ the following formula from²¹:

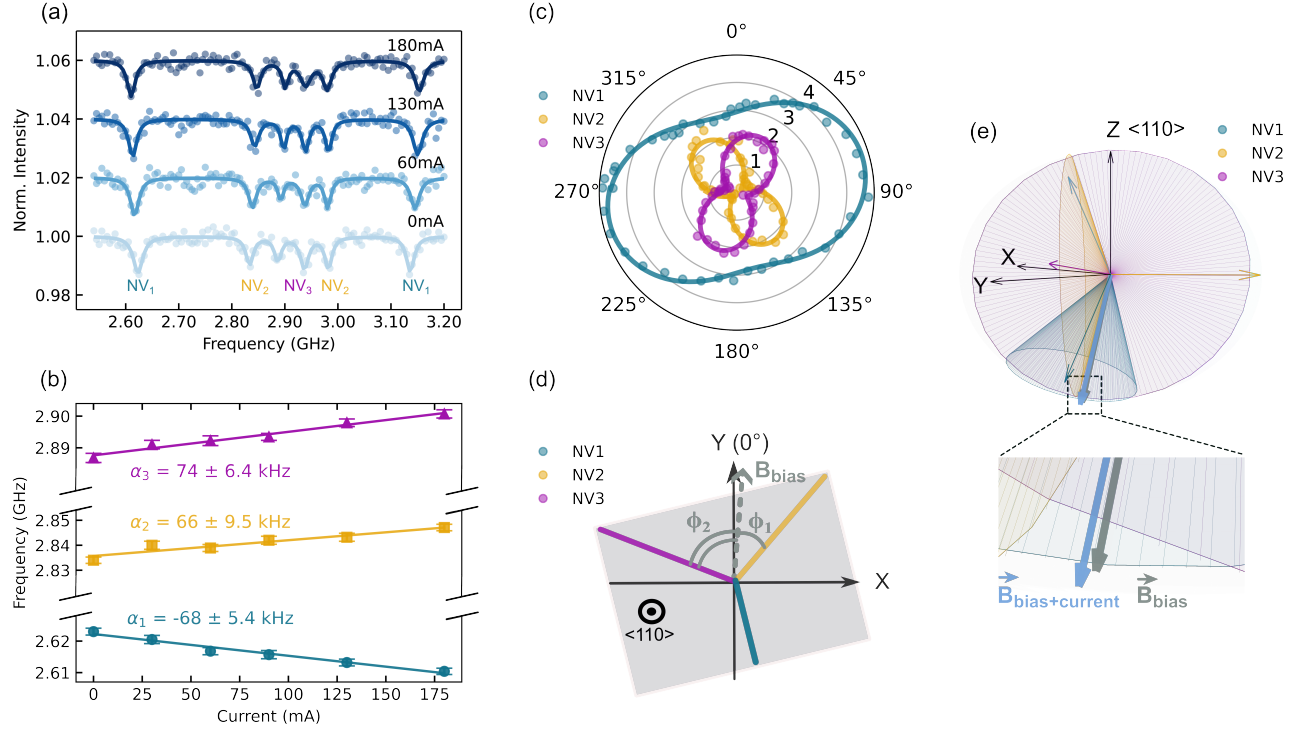


Figure 4. B-field vector reconstruction of the DC current using three different NV crystallographic orientations. (a) ODMR with an external magnetic field with different magnetic field projections on three NV orientations for four currents from 0-180 mA. (b) The resonance frequency shift of the three NVs with applied current for $m_s = 0$ to $m_s = -1$ transition. The data points are shown with blue circles for NV₁, yellow squares for NV₂, and purple triangles for NV₃, and the slope (α) of their linear fits in solid lines give the frequency shift per 1mA current. (c) polar plot of 3 NVs electric dipoles derived using a HWP in confocal and measuring the contrast of ODMR signal; The $\theta_{\text{light field}} = 0^\circ \pm 5^\circ$ is parallel to the waveguide mode polarization axis. (d) Using the polar plot in (c), we show the schematic view of NV-axis orientations viewed along z-axis to (110) surface. The y-axis is along the waveguide polarization axis in the lab frame. The projection of the B_{bias} on (110) plane is shown with a dashed arrow with the azimuthal angle $\phi_1 = 33 \pm 3^\circ$ and $\phi_2 = 77 \pm 3^\circ$ derived from Eq. (5). (e) Polar cones around three NV axes at $I = 0$ mA showing possible orientations of the B-field vector from the bias field. The x-y plane is the (110) surface where two of the NV orientations (labeled as NV_{2,3}) lie on it, and two other NV axes are $\pm 54.73^\circ$ out of the x-y plane. The intersection of the three cones gives the B-field vector orientation. The zoom-in area shows the triangle area of the crossed cones with the B-field vectors of B_{bias} and $B_{\text{bias+current}}$.

$$(g\mu_B B)^2 = \frac{1}{3} \left(v_1^2 + v_2^2 - v_1 v_2 - D^2 \right) - E^2, \quad (3)$$

with $D = 2.872$ GHz and $E = 8.15$ MHz derived from the ODMR signal at zero B-field. To reconstruct the full B-field vector, we must also determine its orientation, including the polar angle (θ) and the azimuthal angle (ϕ). The polar angle θ is given by²¹:

$$\Delta = \frac{7D^3 + 2(v_1 + v_2) \left(2(v_1^2 + v_2^2) - 5v_1 v_2 - 9E^2 \right) - 3D \left(v_1^2 + v_2^2 - v_1 v_2 + 9E^2 \right)}{9 \left(v_1^2 + v_2^2 - v_1 v_2 - D^2 \right) - 3E^2} \quad (4)$$

with $\Delta \approx D \cos(2\theta)$.

Table II (III) shows the magnitude of the B-field and its polar angles at $I = 0$ mA ($I = 30$ mA) with $|B| \cos \theta$ being the projection of the B-field on each NV-axis. From the difference of $B(I = 30) - B(I = 0)$, the B-field generated by the DC current of 30 mA can be determined as (0.21 ± 0.16) mT. This value closely aligns with the simulated B-field value of (0.22 ± 0.07) mT, as illustrated in Figure 3, validating the experimental results.

Table II. B-field magnitude and polar angle at $I = 0$ mA.

	B (mT)	θ°	$ B \cos \theta$ (mT)
NV ₁	10.15 ± 0.09	25.4 ± 1.1	9.18 ± 0.12
NV ₂	9.75 ± 0.11	74.36 ± 0.27	2.62 ± 0.05
NV ₃	9.95 ± 0.12	85.61 ± 0.26	0.726 ± 0.046

Table III. B-field magnitude and polar angle at $I = 30$ mA.

	B (mT)	θ°	$ B \cos \theta$ (mT)
NV ₁	10.18 ± 0.1	24.6 ± 1.2	9.24 ± 0.13
NV ₂	10.03 ± 0.11	75.69 ± 0.32	2.48 ± 0.06
NV ₃	10.26 ± 0.13	86.15 ± 0.26	0.677 ± 0.047

Next, we calculate the azimuthal angle (ϕ) by knowing the orientation of each NV-axis with respect to the (110) facet. Two possible NV orientations are parallel to the (110) plane, and the other two are tilted ± 54.73 degrees out of the plane.

To identify which resonance dips in Figure 4(a) correspond to the in-plane NV axis, we perform ODMR in a confocal setup with a half-wave plate (HWP) in the excitation/detection path and calculate the contrast of each resonance dip while rotating the polarization of the light field²². Figure 4(c) shows the polar plot of three NV orientations labeled as NV_{1,2,3}.

The polar plots for NV₂ and NV₃ indicate a single electric dipole pattern, while NV₁ displays a pattern consistent with two electric dipoles. Each NV center has a pair of orthogonal dipoles that are perpendicular to the spin axis (NV-axis). Considering the (110) crystal facet and the two in-plane NV orientations, each in-plane NV has a pair of dipoles, with one dipole from each pair not coupling to the (110) plane. Therefore, based on the dipole patterns observed in Figure 4(c), NV₂ and NV₃ are identified as the in-plane NV axes. Conversely, the NV₁ pattern suggests it corresponds to one of the out-of-plane NV orientations. The NV₁ orientation is explained later in the text.

Using the B-field projections from Tables II and III, we can calculate the azimuthal angle ϕ using the following equation:

$$\frac{\cos(\phi_1)}{\cos(\phi_2)} = \frac{B\cos\theta_2}{B\cos\theta_3} \quad (5)$$

with $\phi_2 = 109.47^\circ - \phi_1$ and $\theta_{2,3}$ are the polar angle of NV_{2,3} respectively.

We derive the following azimuthal angles: $\phi_1 = 33 \pm 3^\circ$ and $\phi_2 = 77 \pm 3^\circ$.

Another significant advantage of determining the relative dipole orientations by rotating the HWP is understanding the electric dipoles' orientation relative to the waveguide mode's polarization axis. As discussed in Figures 2(b) and 2(c), the waveguides guide light with a polarization parallel to the waveguide sidewalls (y-axis). We used the same HWP in the confocal setup for the polar pattern measurements as we did for the waveguide-assisted ODMR. In Figure 4(c), the polarization axis of the light field corresponds to $0 \pm 5^\circ$, which is parallel to the y-axis in Figure 4(d). This approach allows us to map the B-field comprehensively in the lab frame with respect to the waveguide mode polarization axis.

In Figure 4(e), we plot the polar cones around the three NV axes to visualize the B-field vector. These cones represent the possible orientations of the B-field based on the polar angles θ from Table II. The intersection of these three cones determines the B-field orientation in NV crystal frame. Geometrically the cones do not intersect if $\theta_i + \theta_j < 109.47^\circ$. Thus, if $\theta_i > 54.735^\circ$, we perform a point mirroring with respect to the origin and define a new angle as $\theta'_i = 180^\circ - \theta_i$ ²³. In Figure 4(e), the polar cones for NV_{2,3} are point mirrored relative to the origin.

To determine whether NV_1 is oriented at 54.73° outward from the (110) surface or inward towards the (110) surface, we refer to the simulation in Figure 3. Given that the B-field from the current is directed inward towards the (110) surface, we conclude that NV_1 is oriented inward towards the (110) facet. Consequently, the intersection of the three cones will be inward towards the (110) surface. Ideally, the intersection of the three cones would form a single point, indicating the precise location of the B-field vector. However, due to experimental uncertainties such as power broadening of the ODMR resonance dips, lattice strain, and temperature fluctuation during the measurement process, the cones intersect to form a triangle²⁴. We use the center of this triangle to determine and plot the B-field vector.

III. EXPERIMENTAL SETUP

The femtosecond laser employed for waveguide writing in diamond is a Yb: KGW fiber laser (Bluecut, Menlosystems) with a 300-fs pulse duration and a 515-nm wavelength (frequency-doubled using an LBO crystal). The laser is focused using a 1.25-NA oil immersion lens (RMS100×-O ×100 Olympus Plan Achromat Oil Immersion Objective, 100× oil immersion, Olympus). Polished synthetic single-crystal diamond samples (2 mm × 2 mm × 0.5 mm, type IIa, electronic grade with nitrogen impurities < 5 ppb, Element 6) are utilized. The sample is mounted on a computer-controlled, three-axis motion stage (ANT130 series, Aerotech) to translate the sample relative to the laser, forming the desired photonic structures. The polarization of the incident laser is oriented perpendicular to the scan direction. The NV centers fabricated by shallow implantation of [$^{15}N^+$] into (110) facets. Using a homebuilt low-energy ion implanter equipped with a Wien mass filter as well as an Einzel lens for beam focusing, nitrogen ions of energy 2.5 or 5 keV implanted at doses of $2, 4, 5 \times 10^{12} \text{ }^{15}N^+/\text{cm}^2$. Subsequently, the substrate is annealed in ultra-high vacuum (UHV) for 3 hours at 1000°C. More info on the implantation procedure can be found in²⁵.

The CW-ODMR is measured using a microwave source (Rohde & Schwarz SMIQ 03), connected to an amplifier (mini-circuits ZHL-42+), and a final output power of 28 dBm. The DC current is created by a Source Measure Unit (SMU) and connected to a BiasTee (mini-circuits ZX85-12G-S+) to be combined with the microwave field and carried out to the sample with a copper wire of 20 μm diameter. A CW green laser at 532 nm wavelength was used for optical pumping.

IV. SUMMARY

In this study, we explore integrating shallow-implanted NV centers in diamond with laser-written waveguides, aiming to enhance the performance and scalability of quantum sensing devices. Our approach leverages the control over light propagation paths provided by femtosecond laser-written waveguides to facilitate excitation and fluorescence detection from an ensemble of NV centers within an area of about $456\ \mu\text{m}^2$. We first characterized the NV centers using a home-built confocal microscope, evaluating their magnetic field sensitivity and coherence properties through CW-ODMR and pulsed measurements. We further investigated the performance of waveguide-assisted ODMR. Exciting NV centers through the waveguides resulted in larger mode volumes and higher excitation power requirements, resulting in sensitivity values ranging from 79 to $370\ \text{nT}/\sqrt{\text{Hz}}$ depending on waveguide losses and NV coupling efficiency. We applied an external DC current to validate the sensing capabilities and observed the resonance shift in the ODMR spectrum. The magnetic field generated by the current was mapped using three different NV crystallographic orientations, allowing for a comprehensive reconstruction of the B-field vector in both the crystal and lab frames. This mapping utilized the distinct polarization axes of the waveguides and NV centers, enabling precise B-field vector determination.

Our findings demonstrate the potential of integrating shallow-implanted NV centers with laser-written waveguides for advanced quantum sensing applications. In particular, we focused on reconstructing the magnetic field vector using a single waveguide sensing task. This reconstruction is performed with respect to the waveguide sidewall aligned with the polarization axis of the waveguides, which is distinct from the intrinsic NV orientations, a property that can be accessed visually from the sample. This approach paves the way for developing scalable, efficient, and easy-to-use quantum sensing devices. This work underlines the promising synergy between NV center technology and femtosecond laser fabrication, contributing to the ongoing advancement in quantum information processing and sensing technologies.

ACKNOWLEDGMENTS

S.S., G.C., R.R., A.J.B., J.P.H., S.M.E. and A.K. acknowledges support of the Marie Curie ITN project LasIonDef (GA n.956387). S.M.E. is thankful for the support from the projects QuantDia (FISR2019-05178) and PNRR PE0000023 NQSTI funded by MUR (Ministero dell'Università e

della Ricerca). A.J.B. and J.P.H. acknowledge the financial support provided by EPSRC via Grant No. EP/T017813/1 and EP/03982X/1. Most measurements were performed on the basis of the Qudi software suite.²⁶

REFERENCES

- ¹C. L. Degen, “Scanning magnetic field microscope with a diamond single-spin sensor,” *Applied Physics Letters* **92**, 243111 (2008), https://pubs.aip.org/aip/apl/article-pdf/doi/10.1063/1.2943282/14395578/243111_1_online.pdf.
- ²S. Steinert, F. Dolde, P. Neumann, A. Aird, B. Naydenov, G. Balasubramanian, F. Jelezko, and J. Wrachtrup, “High sensitivity magnetic imaging using an array of spins in diamond,” *Review of Scientific Instruments* **81**, 043705 (2010).
- ³H. C. Davis, P. Ramesh, A. Bhatnagar, A. Lee-Gosselin, J. F. Barry, D. R. Glenn, R. L. Walsworth, and M. G. Shapiro, “Mapping the microscale origins of magnetic resonance image contrast with subcellular diamond magnetometry,” *Nature Communications* **9**, 131 (2018), publisher: Nature Publishing Group.
- ⁴M. W. Doherty, N. B. Manson, P. Delaney, F. Jelezko, J. Wrachtrup, and L. C. L. Hollenberg, “The nitrogen-vacancy colour centre in diamond,” *Physics Reports The nitrogen-vacancy colour centre in diamond*, **528**, 1–45 (2013).
- ⁵S. Hong, M. S. Grinolds, L. M. Pham, D. Le Sage, L. Luan, R. L. Walsworth, and A. Yacoby, “Nanoscale magnetometry with NV centers in diamond,” *MRS Bulletin* **38**, 155–161 (2013).
- ⁶R. Schirhagl, K. Chang, M. Loretz, and C. L. Degen, “Nitrogen-Vacancy Centers in Diamond: Nanoscale Sensors for Physics and Biology,” *Annual Review of Physical Chemistry* **65**, 83–105 (2014), publisher: Annual Reviews.
- ⁷B. K. Ofori-Okai, S. Pezzagna, K. Chang, M. Loretz, R. Schirhagl, Y. Tao, B. A. Moores, K. Groot-Berning, J. Meijer, and C. L. Degen, “Spin properties of very shallow nitrogen vacancy defects in diamond,” *Physical Review B* **86**, 081406 (2012), publisher: American Physical Society.
- ⁸K. Ohashi, T. Rosskopf, H. Watanabe, M. Loretz, Y. Tao, R. Hauert, S. Tomizawa, T. Ishikawa, J. Ishi-Hayase, S. Shikata, C. L. Degen, and K. M. Itoh, “Negatively charged nitrogen-vacancy centers in a 5 nm thin ¹²C diamond film,” *Nano Letters* **13**, 4733–4738 (2013).
- ⁹B. J. Maertz, A. P. Wijnheijmer, G. D. Fuchs, M. E. Nowakowski, and D. D. Awschalom, “Vector

- magnetic field microscopy using nitrogen vacancy centers in diamond,” [Applied Physics Letters](#) **96**, 092504 (2010).
- ¹⁰A. W. Elshaari, W. Pernice, K. Srinivasan, O. Benson, and V. Zwiller, “Hybrid integrated quantum photonic circuits,” [Nature Photonics](#) **14**, 285–298 (2020), publisher: Nature Publishing Group.
- ¹¹S. Johnson, P. R. Dolan, and J. M. Smith, “Diamond photonics for distributed quantum networks,” [Progress in Quantum Electronics](#) **55**, 129–165 (2017).
- ¹²V. Bharadwaj, O. Jedrkiewicz, J. P. Hadden, B. Sotillo, M. R. Vázquez, P. Dentella, T. T. Fernandez, A. Chiappini, A. N. Giakoumaki, T. L. Phu, M. Bollani, M. Ferrari, R. Ramponi, P. E. Barclay, and S. M. Eaton, “Femtosecond laser written photonic and microfluidic circuits in diamond,” [Journal of Physics: Photonics](#) **1**, 022001 (2019), publisher: IOP Publishing.
- ¹³B. Sotillo, V. Bharadwaj, J. P. Hadden, M. Sakakura, A. Chiappini, T. T. Fernandez, S. Longhi, O. Jedrkiewicz, Y. Shimotsuma, L. Criante, R. Osellame, G. Galzerano, M. Ferrari, K. Miura, R. Ramponi, P. E. Barclay, and S. M. Eaton, “Diamond photonics platform enabled by femtosecond laser writing,” [Scientific Reports](#) **6**, 35566 (2016), publisher: Nature Publishing Group.
- ¹⁴S. M. Eaton, J. P. Hadden, V. Bharadwaj, J. Forneris, F. Picollo, F. Bosia, B. Sotillo, A. N. Giakoumaki, O. Jedrkiewicz, A. Chiappini, M. Ferrari, R. Osellame, P. E. Barclay, P. Olivero, and R. Ramponi, “Quantum Micro–Nano Devices Fabricated in Diamond by Femtosecond Laser and Ion Irradiation,” [Advanced Quantum Technologies](#) **2**, 1900006 (2019), _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/qute.201900006>.
- ¹⁵M. Hoese, M. K. Koch, V. Bharadwaj, J. Lang, J. P. Hadden, R. Yoshizaki, A. N. Giakoumaki, R. Ramponi, F. Jelezko, S. M. Eaton, and A. Kubanek, “Integrated Magnetometry Platform with Stackable Waveguide-Assisted Detection Channels for Sensing Arrays,” [Physical Review Applied](#) **15**, 054059 (2021).
- ¹⁶B. Sotillo, A. Chiappini, V. Bharadwaj, J. P. Hadden, F. Bosia, P. Olivero, M. Ferrari, R. Ramponi, P. E. Barclay, and S. M. Eaton, “Polarized micro-Raman studies of femtosecond laser written stress-induced optical waveguides in diamond,” [Applied Physics Letters](#) **112**, 031109 (2018).
- ¹⁷A. Dréau, M. Lesik, L. Rondin, P. Spinicelli, O. Arcizet, J.-F. Roch, and V. Jacques, “Avoiding power broadening in optically detected magnetic resonance of single NV defects for enhanced dc magnetic field sensitivity,” [Physical Review B](#) **84**, 195204 (2011).
- ¹⁸E. Bauch, S. Singh, J. Lee, C. A. Hart, J. M. Schloss, M. J. Turner, J. F. Barry, L. M. Pham,

- N. Bar-Gill, S. F. Yelin, and R. L. Walsworth, “Decoherence of ensembles of nitrogen-vacancy centers in diamond,” [Physical Review B **102**, 134210 \(2020\)](#), publisher: American Physical Society.
- ¹⁹S. Chakravarthi, C. Pederson, Z. Kazi, A. Ivanov, and K.-M. C. Fu, “Impact of surface and laser-induced noise on the spectral stability of implanted nitrogen-vacancy centers in diamond,” [Physical Review B **104**, 085425 \(2021\)](#), publisher: American Physical Society.
- ²⁰Y. Guo, J. P. Hadden, F. Gorrini, G. Coccia, V. Bharadwaj, V. K. Kavatamane, M. S. Alam, R. Ramponi, P. E. Barclay, A. Chiappini, M. Ferrari, A. Kubanek, A. Bifone, S. M. Eaton, and A. J. Bennett, “Laser-written waveguide-integrated coherent spins in diamond,” [APL Photonics **9**, 076103 \(2024\)](#).
- ²¹G. Balasubramanian, I. Y. Chan, R. Kolesov, M. Al-Hmoud, J. Tisler, C. Shin, C. Kim, A. Wojcik, P. R. Hemmer, A. Krueger, T. Hanke, A. Leitenstorfer, R. Bratschitsch, F. Jelezko, and J. Wrachtrup, “Nanoscale imaging magnetometry with diamond spins under ambient conditions,” [Nature **455**, 648–651 \(2008\)](#).
- ²²T. P. M. Alegre, C. Santori, G. Medeiros-Ribeiro, and R. G. Beusoleil, “Polarization-selective excitation of nitrogen vacancy centers in diamond,” [Physical Review B **76**, 165205 \(2007\)](#), publisher: American Physical Society.
- ²³T. Weggler, C. Ganslmayer, F. Frank, T. Eilert, F. Jelezko, and J. Michaelis, “Determination of the Three-Dimensional Magnetic Field Vector Orientation with Nitrogen Vacany Centers in Diamond,” [Nano Letters **20**, 2980–2985 \(2020\)](#), publisher: American Chemical Society.
- ²⁴B. Chen, X. Hou, F. Ge, X. Zhang, Y. Ji, H. Li, P. Qian, Y. Wang, N. Xu, and J. Du, “Calibration-Free Vector Magnetometry Using Nitrogen-Vacancy Center in Diamond Integrated with Optical Vortex Beam,” [Nano Letters **20**, 8267–8272 \(2020\)](#), publisher: American Chemical Society.
- ²⁵J. Lang, S. Häußler, J. Fuhrmann, R. Waltrich, S. Laddha, J. Scharpf, A. Kubanek, B. Naydenov, and F. Jelezko, “Long optical coherence times of shallow-implanted, negatively charged silicon vacancy centers in diamond,” [Applied Physics Letters **116** \(2020\), 10.1063/1.5143014](#), publisher: AIP Publishing.
- ²⁶J. M. Binder, A. Stark, N. Tomek, J. Scheuer, F. Frank, K. D. Jahnke, C. Müller, S. Schmitt, M. H. Metsch, T. Uden, T. Gehring, A. Huck, U. L. Andersen, L. J. Rogers, and F. Jelezko, “Qudi: A modular python suite for experiment control and data processing,” [SoftwareX **6**, 85–90 \(2017\)](#).