

GANG HUNTER

"~~XXXXXXXXXX~~" CONNECTOR ASSIGNMENT (JAMMA)

SOLDER SIDE	PIN	PARTS SIDE		
GND	1	GND		
GND	2	GND		
+5V	3	+5V		
+5V	4	+5V		
-5V	5	-5V		
+12V	6	+12V		
	7			
COIN COUNTER 2	8	COIN COUNTER 1		
	9			
SPEAKER(-)	10	SPEAKER(+)		
	11			
VIDEO GREEN	12	VIDEO RED		
VIDEO SYNC	13	VIDEO BLUE		
	14	VIDEO GND		
	15			
COIN IN 2	16	COIN IN 1		
START 2	17	START 1		
2P CONTROL UP	18	1P CONTROL UP		
2P CONTROL DOWN	19	1P CONTROL DOWN		
2P CONTROL LEFT	20	1P CONTROL LEFT		
2P CONTROL RIGHT	21	1P CONTROL RIGHT		
2P CONTROL PUSH 1	22	1P CONTROL PUSH 1		
2P CONTROL PUSH 2	23	1P CONTROL PUSH 2		
BLANK	24	25	26	BLANK
GND		27		GND
GND		28		GND

DIPSW 表 (ピストル付ききょう体版) 1/2  
 List of DIP-SW DIP SW SETTING "GANG HUNTER"

DIP SW	1	2	3	4	5	6	7	8
コイン1 Coin 1	1/1	OFF	OFF	OFF				
	2/1	ON	OFF	OFF				
コイン/ クレジット Coin/Credit	1/3	OFF	ON	OFF				
	4/1	ON	ON	OFF				
	1/2	OFF	OFF	ON				
	3/1	ON	OFF	ON				
	1/5	OFF	ON	ON				
	5/1	ON	ON	ON				
コイン2 Coin 2	1/1				OFF	OFF		
	2/1				ON	OFF		
コイン/ クレジット Coin/Credit	1/2				OFF	ON		
	2/3				ON	ON		
テストモード Test Mode	Off						OFF	
	On						ON	
画面反転 Screen Reverse	Off						OFF	
	On						ON	
ゲームスタイル Game Style	Uplight							OFF
	Table							ON
出荷時の設定 Setting at time of shipment		OFF	OFF	OFF	OFF	OFF	OFF	OFF

DIPSW 表 (ピストル付ききょう体版) 2/2  
 List of DIP-SW "GANG HUNTER" DIP SW. CHART

DIPSW 2		1	2	3	4	5	6	7	8
難易度 Difficulty	普通 Normal	OFF	OFF						
	簡単 Easy	ON	OFF						
	少し難しい Hard	OFF	ON						
	難しい Very Hard	ON	ON						
ボーナス プレイヤー Extra lives 一人目/二人目 1st/2nd	50000 / 150000			OFF					
	100000 / 200000			ON					
ゲームタイプ Game type	ピストル Gun				OFF				
	レバー joystick				ON				
プレイヤー数 # of players	3					OFF	OFF		
	1					ON	OFF		
	2					OFF	ON		
	4					ON	ON		
デモプレイ中の サウンド Demo sound	On							OFF	
	OFF							ON	
国別コード Country	国内 Japan								OFF
	海外 Overseas								ON
出荷時の設定 Setting at time of shipment		OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON

FILE: \_\_\_\_\_

TITLE: \_\_\_\_\_ PCB: \_\_\_\_\_ DATE: \_\_\_\_\_

OBJ	
V-RAM	

COMMENT: \_\_\_\_\_

DESIGN: \_\_\_\_\_


Power Supply x 2  
PCB x 1  
Gun Unit x 1

All to be grounded at one point.  
(Ground wires to be connected in to 1 wire)

2. +5V PEARGE AT DEANT RA

CONNECT AS SHOWN AS  
"OPERATION WALT"

NOTE: OTHER WIRES SHOULD BE

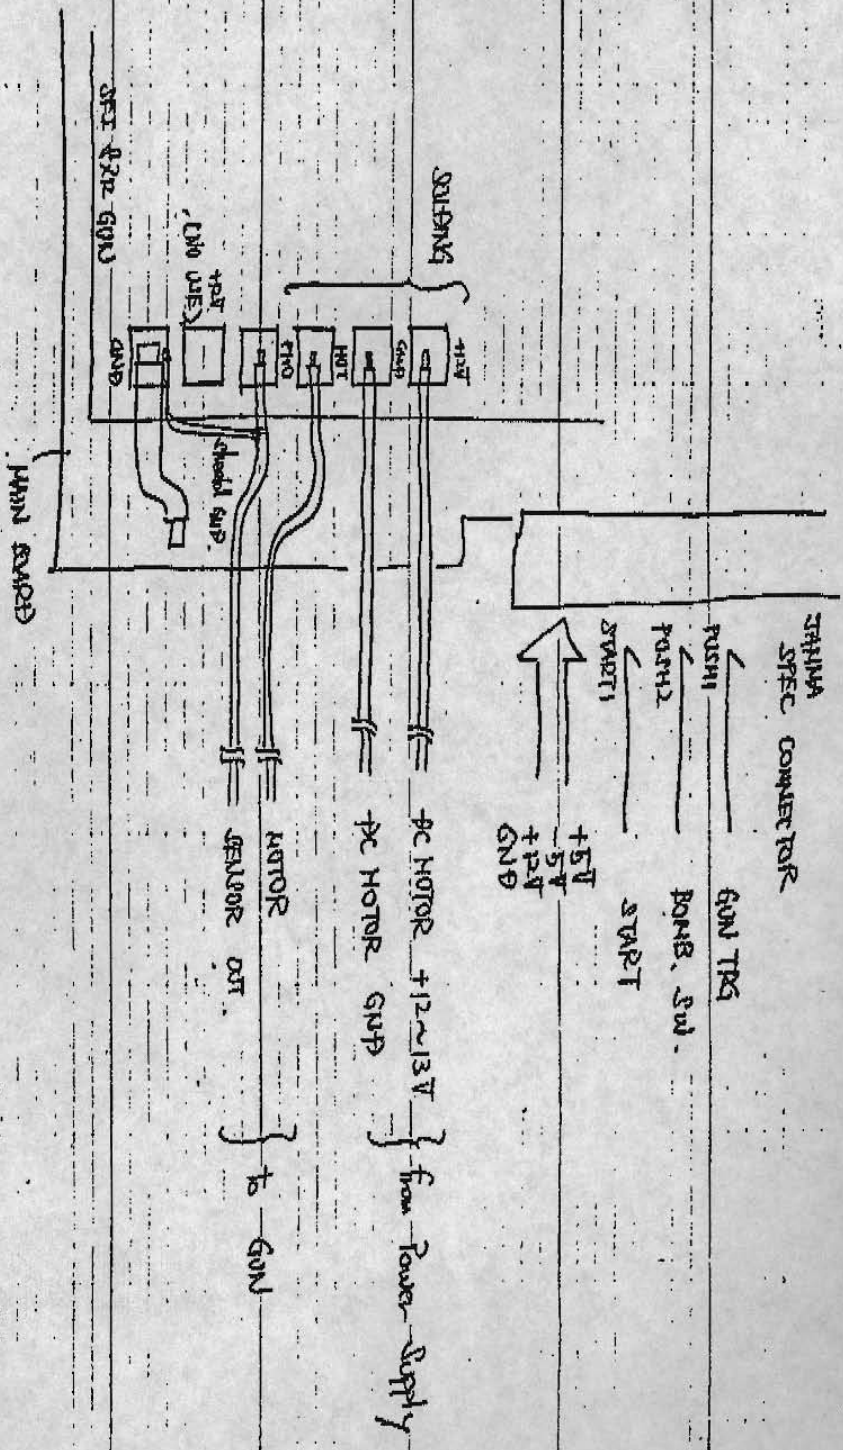

0 10 20 30 40 50 60