

EuCARD-2

Enhanced European Coordination for Accelerator Research & Development

Presentation

CERN Future Circular Colliders Study

Zimmermann, Frank (CERN)

16 December 2013



The EuCARD-2 Enhanced European Coordination for Accelerator Research & Development project is co-funded by the partners and the European Commission under Capacities 7th Framework Programme, Grant Agreement 312453.

This work is part of EuCARD-2 Work Package 5: **Extreme Beams (XBEAM)**.

The electronic version of this EuCARD-2 Publication is available via the EuCARD-2 web site <http://eucard2.web.cern.ch/> or on the CERN Document Server at the following URL:
<http://cds.cern.ch/search?p=CERN-ACC-SLIDES-2014-0007>


CERN Future Circular Colliders Study

Frank Zimmermann

International Workshop on Future High Energy Circular Colliders

IHEP Beijing,

16 December 2013



Many thanks to Roy Aleksan, Michael Benedikt (FCC Design Study Coordinator), Alain Blondel (FCC Kick-Off LOC Chair), Frederick Bordry (new CERN DAT), Luca Bottura, Francesco Cerutti, John Ellis, Hector Garcia, Cedric Garion,, Bernhard Holzer, Patrick Janot, Erk Jensen, Eberhard Keil, Roberto Kersevan, Max Klein, Mike Koratzinos, Luisella Lari, Eugene Levichev, Nicolas Mounet, Robert Rimmer, Daniel Schulte, Valery Telnov, Rogelio Tomas, Jörg Wenninger





European Strategy Update (ESU) on Particle Physics

Design studies and R&D at the energy frontier

“to propose an ambitious **post-LHC** accelerator project at **CERN** by the time of the next Strategy update”:

- d) CERN should undertake design studies for accelerator projects in a global context, with emphasis on *proton-proton and electron-positron high-energy frontier machines*. These design studies should be coupled to a vigorous accelerator *R&D* programme, including *high-field magnets and high-gradient accelerating structures, in collaboration with national institutes, laboratories and universities worldwide*.**

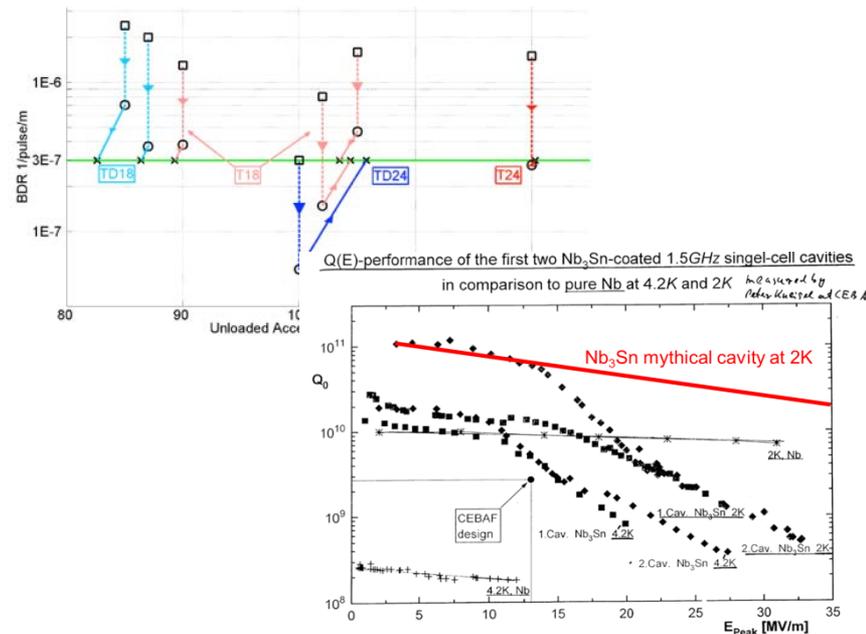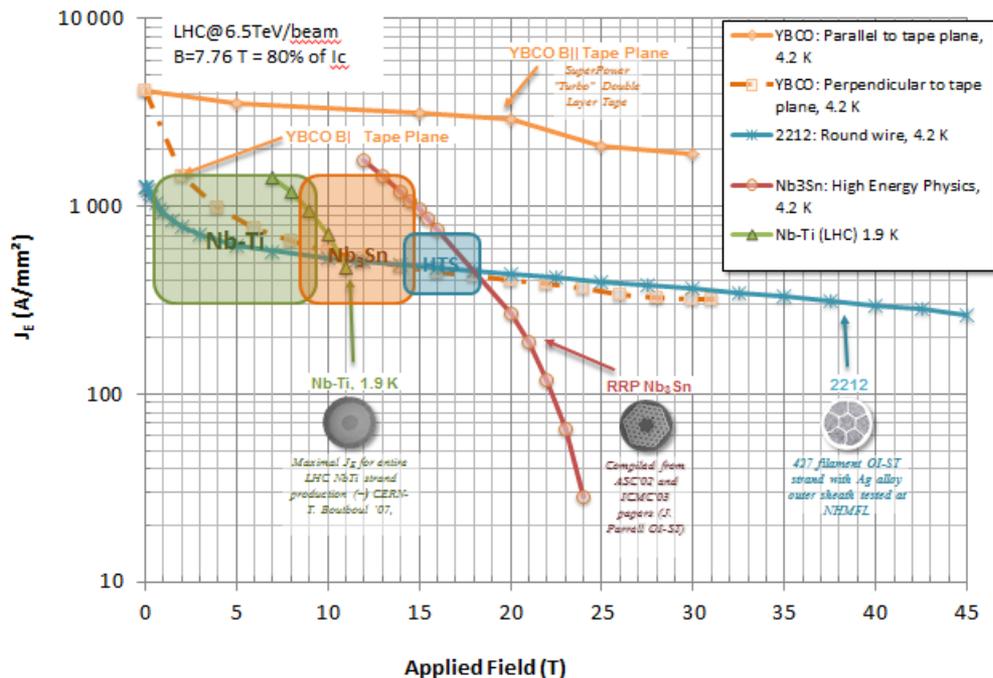

high-gradient acceleration:
CLIC and TLEP/FLC

high-field magnets: VHE-LHC/FHC

FCC Study (Future Circular Colliders)

CDR and cost review for the next ESU (2018)

- 80-100 km tunnel infrastructure in Geneva area
- design driven by pp-collider requirements
- with possibility of e⁺-e⁻ (TLEP) and p-e (VLHeC)
- CERN-hosted study performed in international collaboration

15 T ⇒ 100 TeV in 100 km
20 T ⇒ 100 TeV in 80 km

LEGEND

- LHC tunnel
- ⋯ HE_LHC 80km option
- potential shaft location



Kick-Off Meeting for FCC Study

- To prepare international collaborations, study scope and topics will be discussed in kick-off meeting at U. Geneva 12-15 February 2014
- CERN would like to promote global collaboration of future circular collider studies



Future Circular Colliders Study
Kickoff Meeting

12-15 February
2014
University of
Geneva, Geneva
Europe/Zurich timezone

Search

UNIVERSITÉ DE GENÈVE CERN FCC

Future Circular Colliders Kickoff Meeting

<http://indico.cern.ch/e/fcc-kickoff>

- Earlier topical workshops on HE-LHC (2010), LEP3/TLEP (6 meetings in 2012-13) and VHE-LHC (2013) in the frame of EuCARD
- Kick-off meeting covers accelerator, detectors, physics case, technology, infrastructure & tunnel construction
- Total no. of participants limited to 500 (early registration suggested)

FCC Study Scope and Structure

Future Circular Colliders - Conceptual Design Study for next European Strategy Update (2018)

Infrastructure

tunnels, surface buildings, transport (access roads), civil engineering, cooling ventilation, electricity, cryogenics, communication & IT, fabrication and installation processes, maintenance, environmental impact and monitoring,

Hadron injectors

Beam optics and dynamics
Functional specs
Performance specs
Critical technical systems
Operation concept

Hadron collider

Optics and beam dynamics
Functional specifications
Performance specs
Critical technical systems
Related R+D programs
HE-LHC comparison
Operation concept
Detector concept
Physics requirements

e+ e- collider

Optics and beam dynamics
Functional specifications
Performance specs
Critical technical systems
Related R+D programs
Injector (Booster)
Operation concept
Detector concept
Physics requirements

e- p option: Physics, Integration, additional requirements

Team preparing FCC Kick-Off & Study

Future Circular Colliders - Conceptual Design Study Study coordination, host state relations, global cost estimate M. Benedikt, F. Zimmermann					
Hadron injectors B. Goddard	VL Hadron collider D. Schulte	Infrastructure, cost estimates P. Lebrun	e+ e- collider J. Wenninger	High Field Magnets L. Bottura	Physics and experiments Hadron physic Experiments, infrastructure A. Ball, F. Gianotti, M. Mangano
				Superconducting RF E. Jensen	
				Cryogenics L. Tavian	
Specific Technologies (MP, Coll, Vac, BI, BT, PO) JM. Jimenez					
e- p option Integration aspects O. Brüning			Operation aspects, energy efficiency, OP & mainten., safety, environment. P. Collier		e+ e- exper., physics A. Blondel J.Ellis, P.Janot
Planning (Implementation roadmap, financial planning, reporting) F. Sonnemann					e- p physics + M. Klein

Main Parameters for FHC (VHE-LHC)


- Energy **100 TeV c.m.**
- Dipole field **15 T** (baseline) [20 T option]
- Circumference ~ 100 km
- #IPs 2+2
- Beam-beam tune shift 0.01 (total for 2 IPs)
- Bunch spacing 25 ns [5 ns option]
- Bunch population (25 ns) 10^{11} – 1×10^{11} (beam current 0.5-1 A)
- Normalized transverse emittance $2.2 \mu\text{m}$
- Luminosity $5 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$
- β^* 1.1 m [2 m conservative option]
- Synchrotron radiation arc 26 W/m/ap. [arc fill factor 78%]
- Stored beam energy 8.3 GJ/beam
- Longit. emit damping time 0.5 h
- Straight section length 1400-2000 m (8 or 12)
- Option: Polarized proton beams (with Siberian snakes)

Some FHC Challenges


- ❑ High-field SC magnet system
- ❑ Vacuum system & **synchrotron radiation heat load**
 - *warm photon absorbers in dipole interconnects? antechamber, higher-T beam screen? **Vacuum stability, impedance, e- cloud, bunch spacing***
- ❑ Synchrotron radiation **damping**
 - *controlled blow up? shorter bunch spacing? crab waist collisions??*
- ❑ **Luminosity limits**
 - *Radiation damage, pile up, bunch spacing, detector technology*
- ❑ **Machine protection**
 - *Energy in beam & magnets, dump, collimation; quench protection*
- ❑ **Optics**
 - *Maximizing fill factor, IR design & length (&#) of straight section*

Cost-Optimized Magnets for FHC

15-T dipole

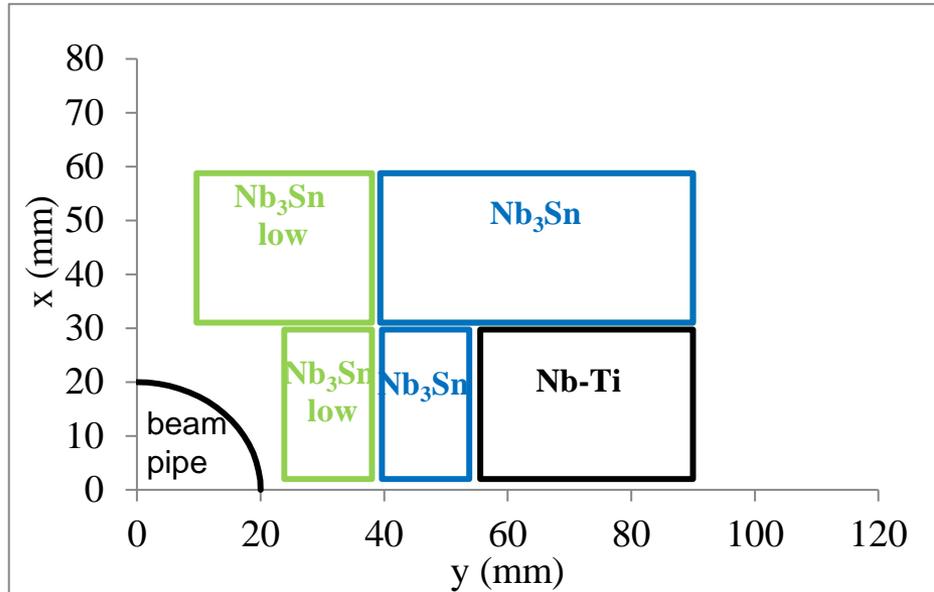


20-T dipole

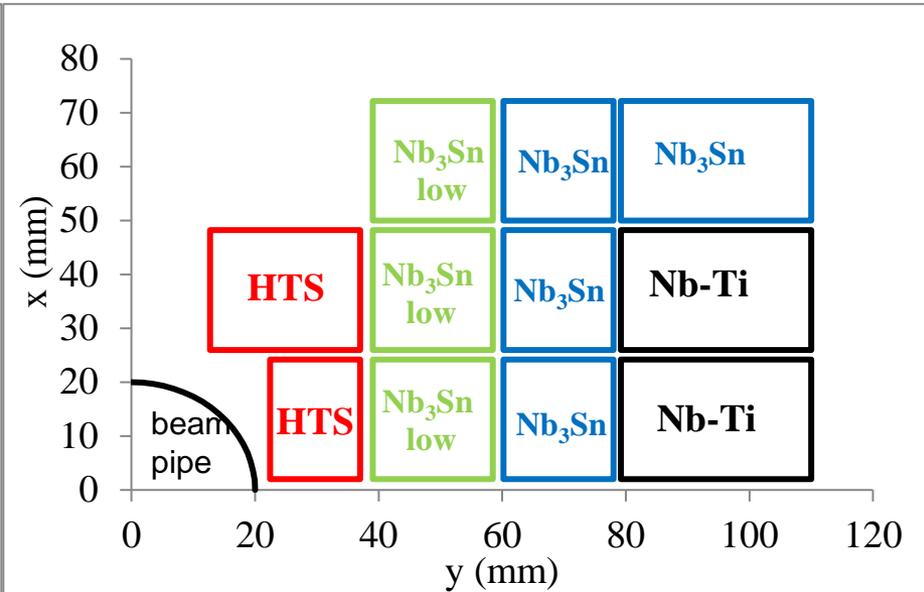

15 T dipoles + 100 km circumference

→ 100 TeV *pp*

Evolution of *Nb-Ti* & *Nb₃Sn* SC Cable

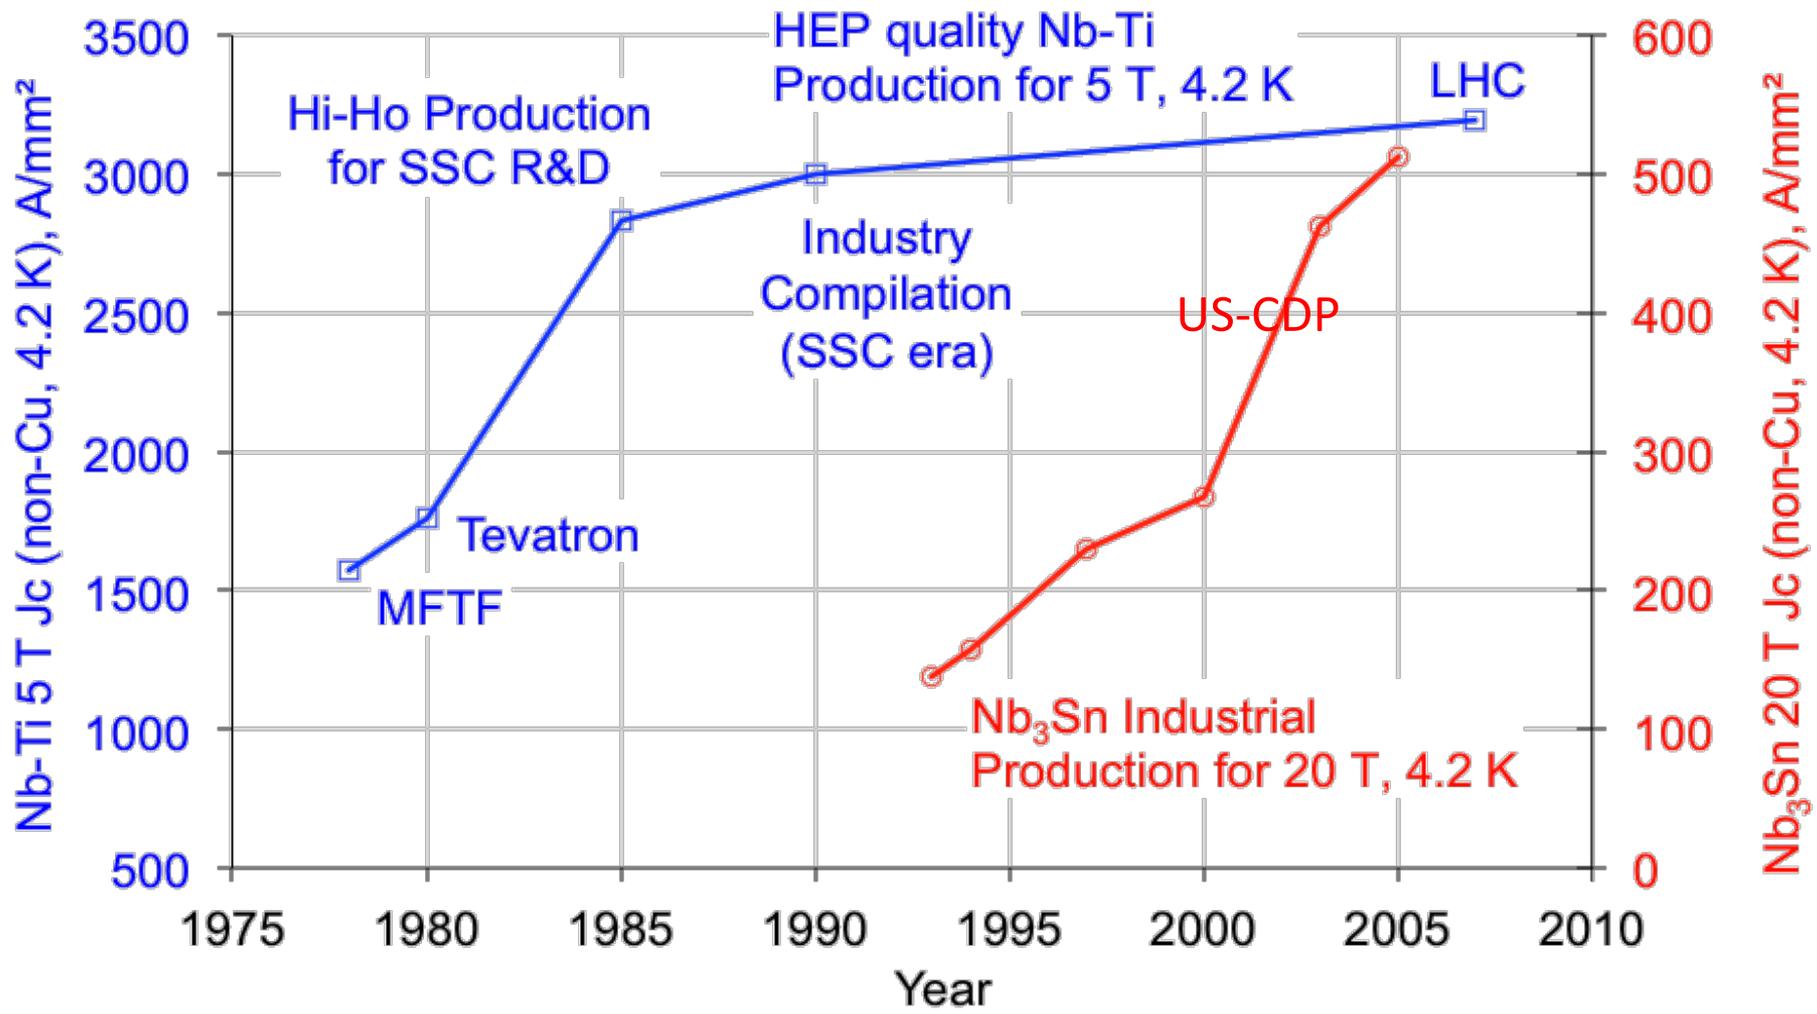

High-Field Dipoles




Accelerator and Fusion Research Division

LBL Superconducting Magnet Program


Newsletter

October 2003

Issue No. 2

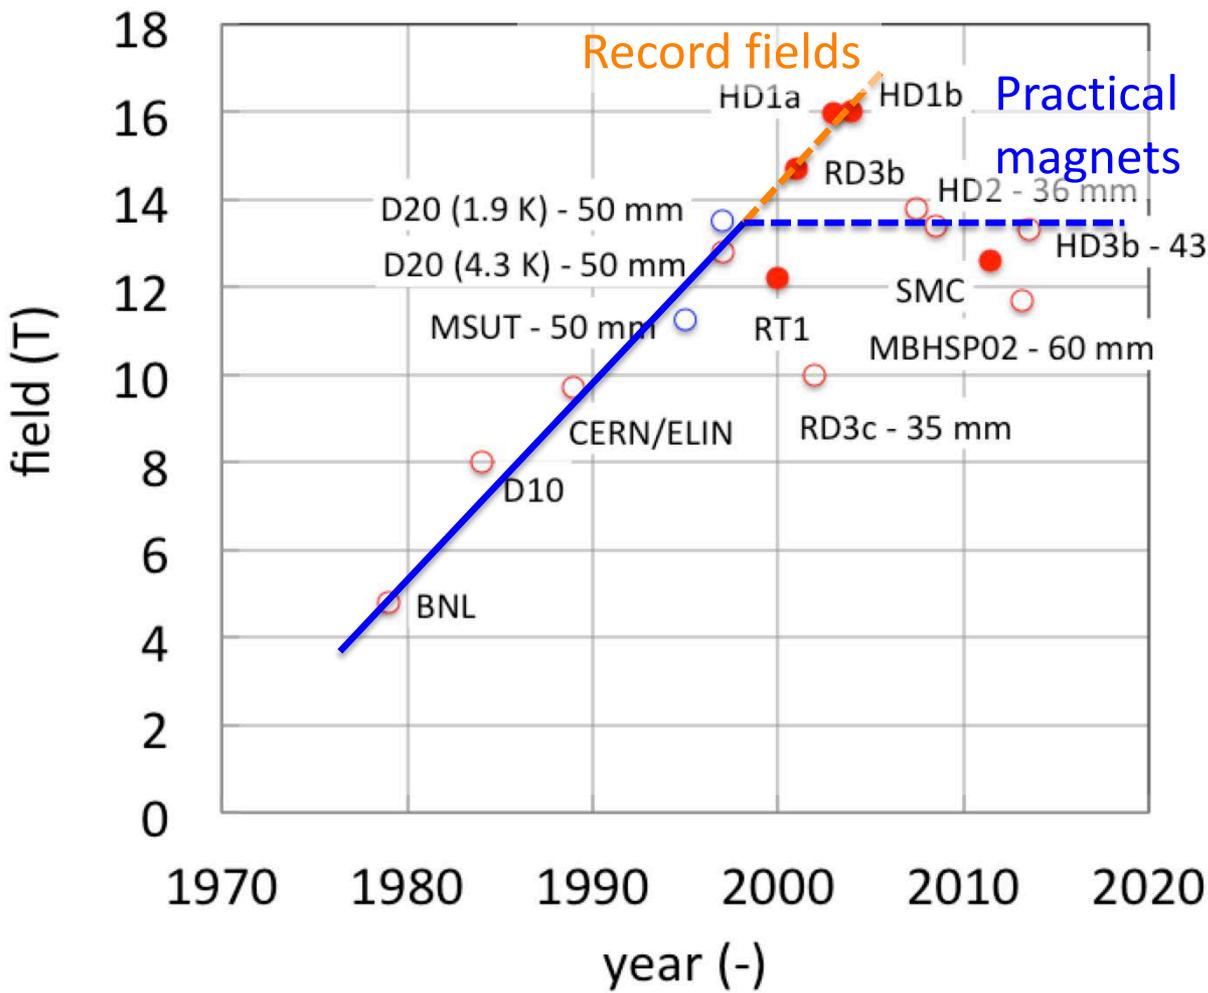

HD-1 Sets New Dipole Field Record

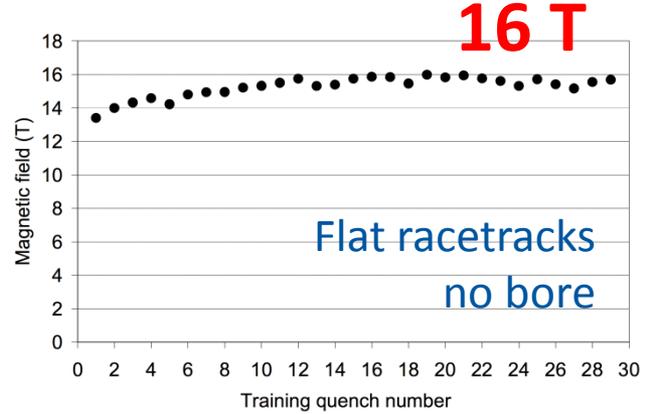

Flat racetracks
no bore


Data by courtesy of L. Rossi (CERN) and S. Caspi (LBL)

11-T accelerator dipoles for HL-LHC

- Demonstrate the required performance (11.25 T at 11850 A)
- Achieve accelerator field quality
- Study in depth mechanics and manufacturing
- Address specific issues such as quench protection

Next 2 years !

FNAL short model

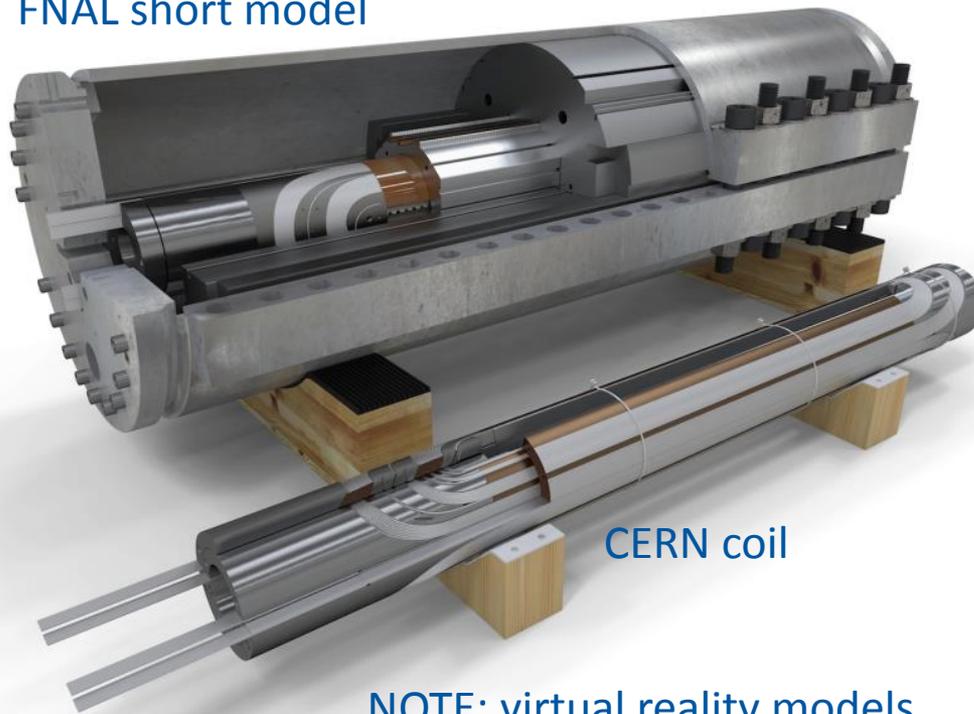

CERN coil

NOTE: virtual reality models




CERN 54/61 practice coil



HL-LHC 11-T performance so far

- Encouraging results !
 - $B_{\max} = 11.7$ T (78% of expected SSL at 1.9 K)
 - Improving field quality (reduced sub-element diameter, cored cable)
- Future work:
 - Ramp-rate quench dependence
 - Holding current quenches
 - Geometric harmonics

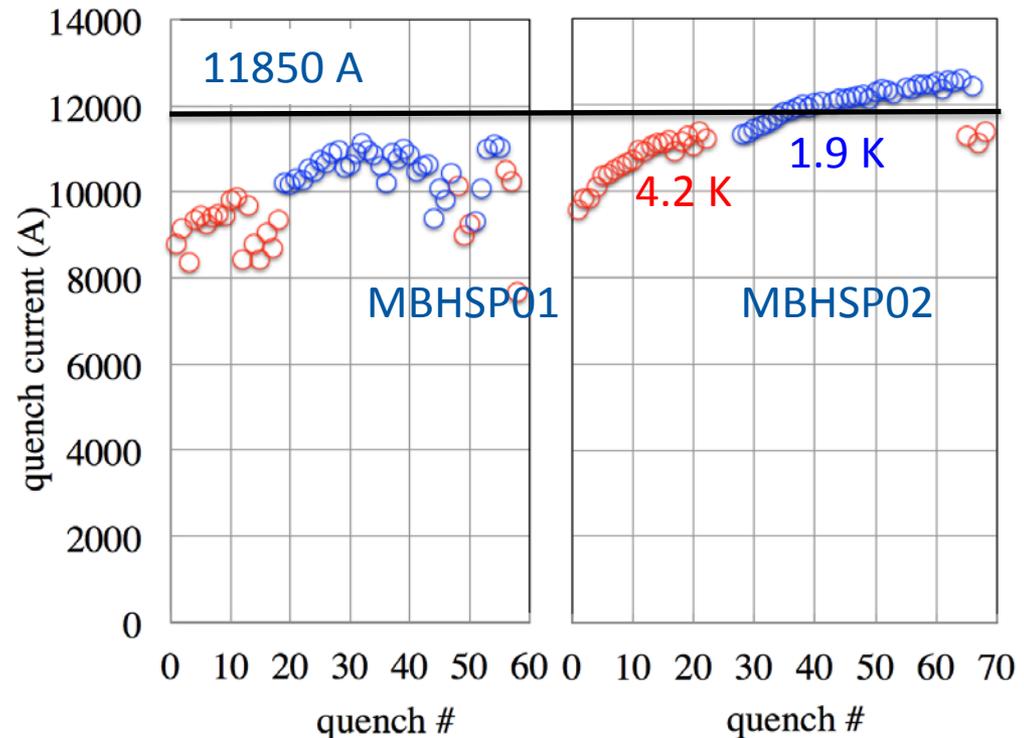



FHC – extracting SR heat

SR heat load 3 MW total;
26 W/m/aperture
one option: dedicated
warm photon stops
in magnet interconnects
as developed by FNAL for VLHC

M. Geynisman et al., "Report on the First VLHC Photon Stop Cryogenic Design Experiment," Advances in cryogenic engineering, Anchorage, AIP Conf.Proc. 710 (2004) 379-388 ;

Also P. Bauer et al., "Report on the First Cryogenic Photon Stop Experiment," FNAL TD-03-021, May 2003

with or w/o antechamber

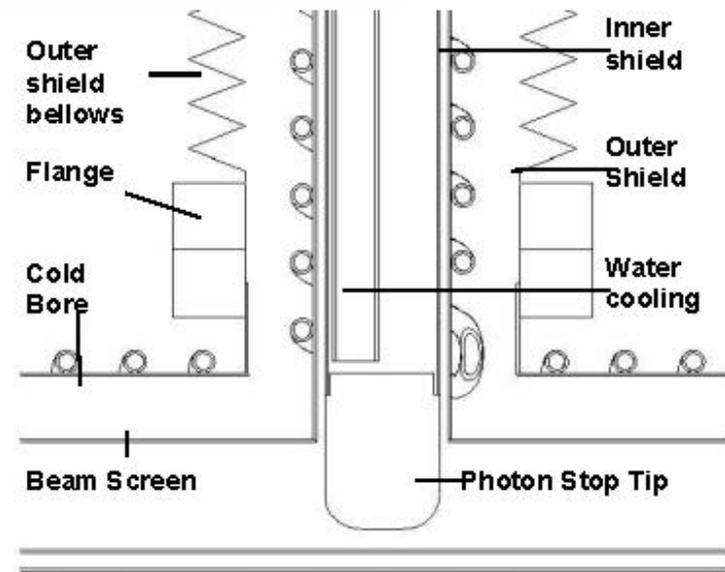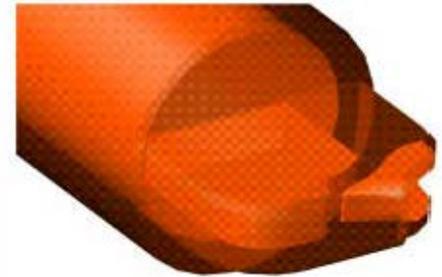

FHC beam power & collimation

Energy stored: 8 GJ per beam (LHC: 0.4 GJ)

- beam dumping system design, interlock system

Collimation

- higher energy density: more robust materials?**
collimators are first hit by beam in case of failure; LHC collimators made from fibre-reinforced carbon (CFC); for FHC more robust composite materials?
- cleaning efficiency degrading with beam energy**
collimators minimize beam loss in the cold regions; nuclear processes inside collimator jaw vary with energy (cross section of single-diffractive scattering increases)
- smaller beam sizes and collimator gaps**
Full collimator gaps of 1 mm or less, requiring higher precision in collimator control, setup and reproducibility.
- magnets in cleaning insertion**
warm magnets at the technological limit; shielded superconducting magnets?

Main Parameters for FLC (*TLEP*)

- Energy c.m. **91 (Z), 160 (W) , 240 (H), 350 ($\bar{t}t$) GeV**
(energy upgrade 500-ZHH/ttH)
- Circumference ~ 100 km
- Total SR power **≤ 100 MW**
- #IPs 4
- Beam-beam tune shift / IP scaled from LEP
- Beam current 7 mA (TLEP-t) to 1400 mA (TLEP-Z)
- Horiz. geom. emittance 2-50 nm
- Vert. geom. emittance 2-60 pm
- Luminosity / IP $6 \times 10^{35} \text{ cm}^{-2}\text{s}^{-1}$ at 91 GeV c.m.
 $5 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$ at 240 GeV c.m.
 $1 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$ at 350 GeV c.m.
- Top-up injection to cope with short lifetime from rad. Bhabha scattering & beamstrahlung
- Polarization at Z pole and WW threshold
- β_y^* 1 mm $\sim \sigma_z$

Some Challenges for FLC (*TLEP*)

- Lifetime limitation by **beamstrahlung** from 120 GeV requires **robust ring optics with small β_y^* (~ 1 mm) & large momentum acceptance ($\geq 2\%$)**.
 - *Nano-beam / crab waist schemes are considered as options*
- Reaching **small vertical emittance** in large machine
- Optimization of the machine layout compatible with **high currents and larger number of bunches at Z**
 - *Number of rings and size of the RF system*
- **Polarization & precise energy calibration at Z pole**, with nat. polarization time ~ 150 h, & at **WW** (~ 5 h)
- RF w **>50% wall-plug to beam power efficiency**
- **Optics changes with energy; lepton injector chain**

lifetime limit: beamstrahlung (BS)

synchrotron radiation in the strong field of opposing beam

Note: Many theoretical beamstrahlung studies in 1980's. Example R. Blankenbecler, S.D. Drell ,
"A Quantum Treatment of Beamstrahlung," Phys.Rev. D36 (1987) 277

makes some e^\pm emit significant part of their energy
& then be lost → **limited beam lifetime**

$$\tau_{BS} \approx \frac{20\sqrt{6\pi}r_e}{n_{IP}\alpha^2} \frac{C}{c} \frac{\gamma}{\eta} u^{3/2} e^u \quad \text{with} \quad u = \eta \frac{\alpha}{3(r_e)^2} \frac{1}{\gamma} \frac{\sigma_z \sigma_x}{N_b}$$

V. Telnov, PRL 110 (2013) 114801
note recent new formula from BINP!

η : momentum acceptance
 σ_x : horizontal beam size at IP

mitigations:

(1) large momentum acceptance η

(2) flat beams [i.e. small ε_y & large β_x^*]

→ minimize $\kappa_\varepsilon = \varepsilon_y / \varepsilon_x$, $\beta_y \sim \beta_x (\varepsilon_y / \varepsilon_x)$ & respect $\beta_y \geq \sigma_z$


(3) fast top up

lifetime values (summer 2013 baseline)

parameters	TLEP Z	TLEP W	TLEP H	TLEP t	
$E_{c.m.}$ [GeV]	91	160	240	350	
beam current [mA]	1440	154	29.8	6.7	
# bunches/beam	7500	3200	167	160	20
# e^\pm /bunch [10^{11}]	4.0	1.0	3.7	0.88	7.0
ϵ_x, ϵ_y [nm]	29.2, 0.05	3.3, 0.017	7.5, 0.05	2, .002	
$\beta_{x,y}^*$ [mm]	500, 1	200, 1	500, 1	1000, 1	
$\sigma_{x,y}^*$ [μm]	121, 0.25	26, 0.13	61, 0.12	45, .045	126, .13
$\sigma_{z,rms}^{\text{tot}}$ [mm] (w BS)	2.93	1.98	2.11	0.77	1.95
$E_{\text{loss}}^{\text{SR}}$ /turn [GeV]	5.05	0.3	1.7	7.5	
$V_{\text{RF,tot}}$ [GV]	2	2	6	12	
\mathcal{L} / IP [$10^{34} \text{cm}^{-2} \text{s}^{-1}$]	59	16	5	1.3	1.0
#IPs	4	4	4	4	
τ_{beam} [min] (r.Bhabha)	99	38	24	21	26
τ_{beam} [min] (BS, $\eta=2\%$)	$>10^{25}$	$>10^6$	9	3.5	0.5

based on Telnov formula


short lifetime \rightarrow booster ring

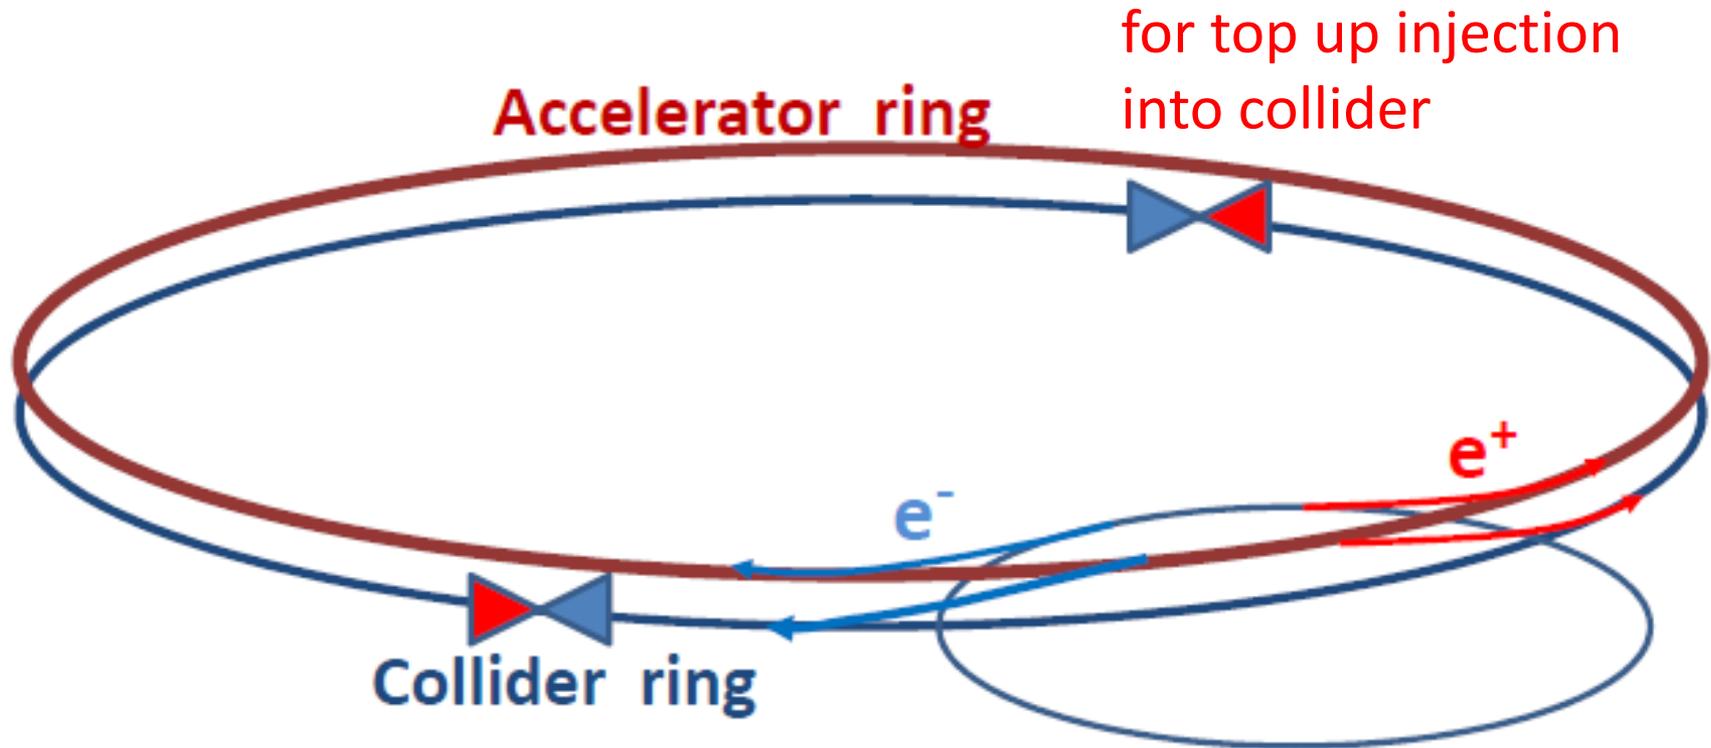

A. Blondel

IR Design


$L^* = 2.0$ m (reduced from 4 m)

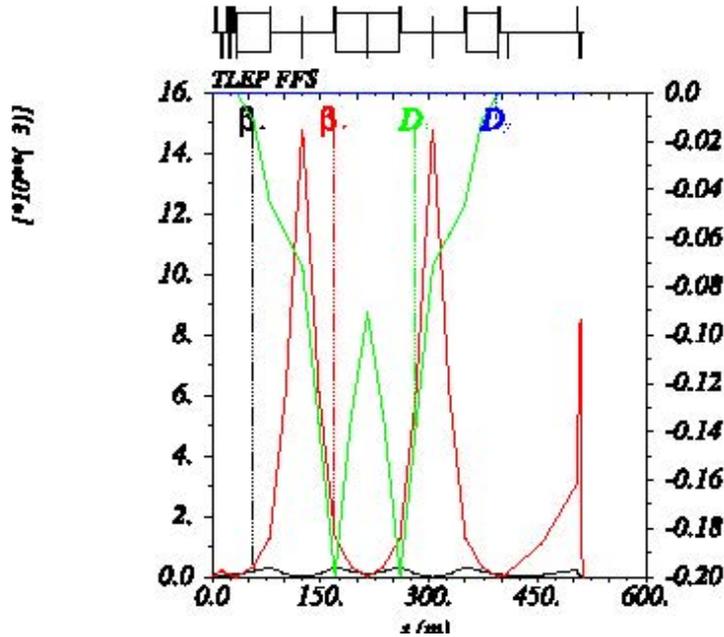

off-momentum
dynamic
aperture
 $\delta=1\%$

H. Garcia Morales, R. Tomas

Magnet	QE1	QD0
L [m]	1.16	2.66
k [m^{-2}]	0.195	-0.195
G [T/m]	113.6	113.6
Ap. rad. ($15\sigma_x$) [mm]	9.8	2.6
B ($15\sigma_x$) [T]	1.11	0.3

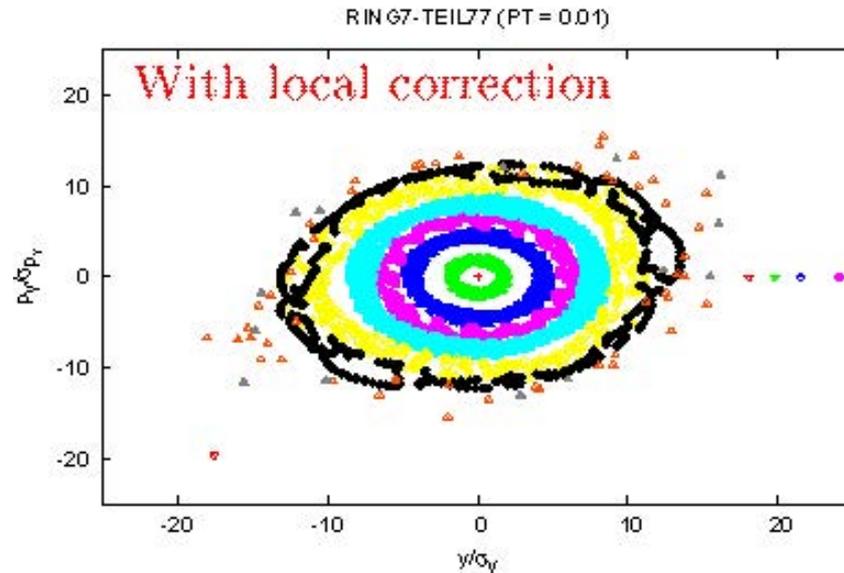

developing FLC/TLEP parameters ...

Parameter	TLEP-Z	TLEP-W	TLEP-H	TLEP-t	LEP2
E (GeV)	45	80	120	175	104
I (mA)	1400	150	30	7	4
N_b [10^{11}]	4.0	1.0	3.7	0.88	5.8
σ_z [mm]	2.93	1.98	2.11	0.77	16..1
$\beta^*_{x/y}$ (mm)	500 / 1	200 / 1	500 / 1	1000 / 1	1500 / 50
$\epsilon_{x,y}$ (nm, pm)	30, 60	3.3, 17	7.5, 15	2, 2	40,~250
$\xi_{x,y}/IP$.068	.086	.094	.057	.066 (y)
L/IP($10^{32}\text{cm}^{-2}\text{s}^{-1}$)	5800	1600	500	132	1.2
<hr/>					
N_b [10^{11}]	1.5	1.0	3.0	0.88	S. White, TLEP6 WS
σ_z [mm]	1.7	1.6	1.65	0.84	
$\epsilon_{x,y}$ (nm, pm)	1.7, 60	4.1, 22	8.8, 19	2.3, 2.3	
$\xi_{x,y}/IP$.029/.024	.068, .051	.065, .054	.055, .036	
L/IP($10^{32}\text{cm}^{-2}\text{s}^{-1}$)	2100	1150	350	175	
<hr/>					
$\beta^*_{x/y}$ (mm)	500 / 1	500 / 1	500 / 1	500 / 1	A.Bogomyagkov, E.Levichev, D.Shatilov, TLEP6 WS
N_b [10^{11}]	1.5	1.0	1.7	1.0	
σ_z [mm]	5.9	9.1	8.2	6.6	
$\epsilon_{x,y}$ (nm, pm)	0.14, 1	0.44, 2	1, 2	2.1, 4.3	
$\xi_{x,y}/IP$.032/.175	.031, .137	.025, .160	.024, .077	
L/IP($10^{32}\text{cm}^{-2}\text{s}^{-1}$)	22970	3980	933	129	





baseline
(analytical)

baseline
(simulated
+ opt.)

nano-
beam
option

higher luminosity + much
better beamstrahlung
lifetime (>100 min)

TMCI instability, 3 cm y half aperture, 5.5 m dipole

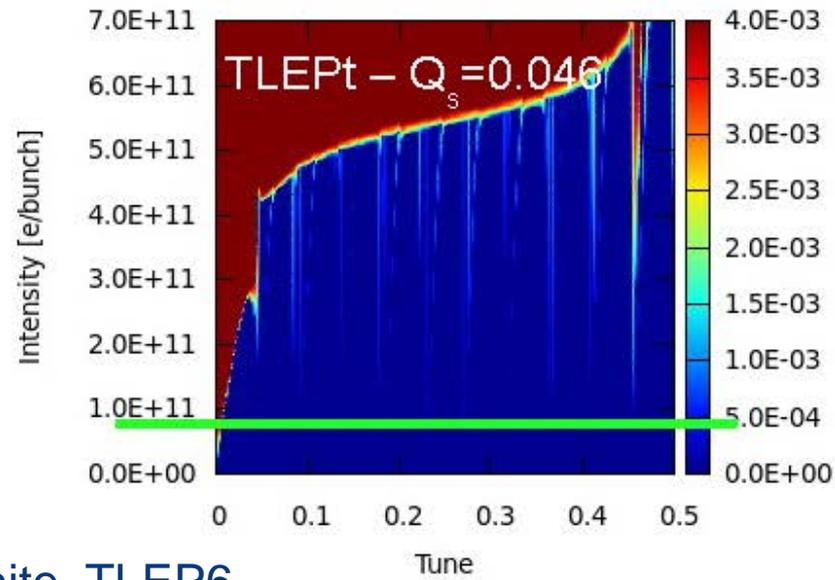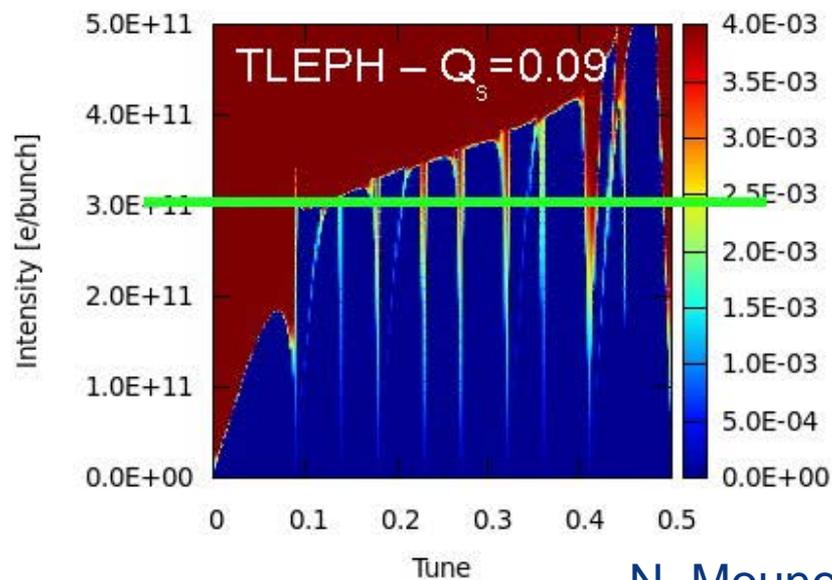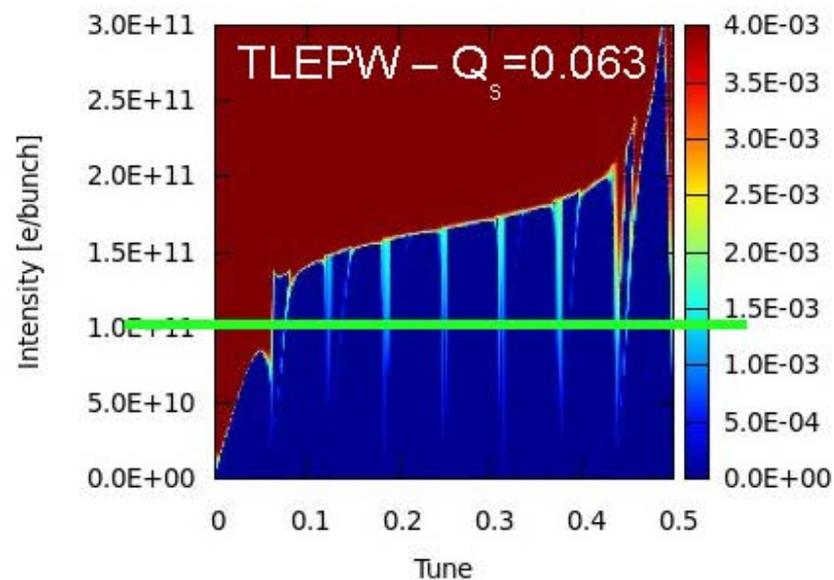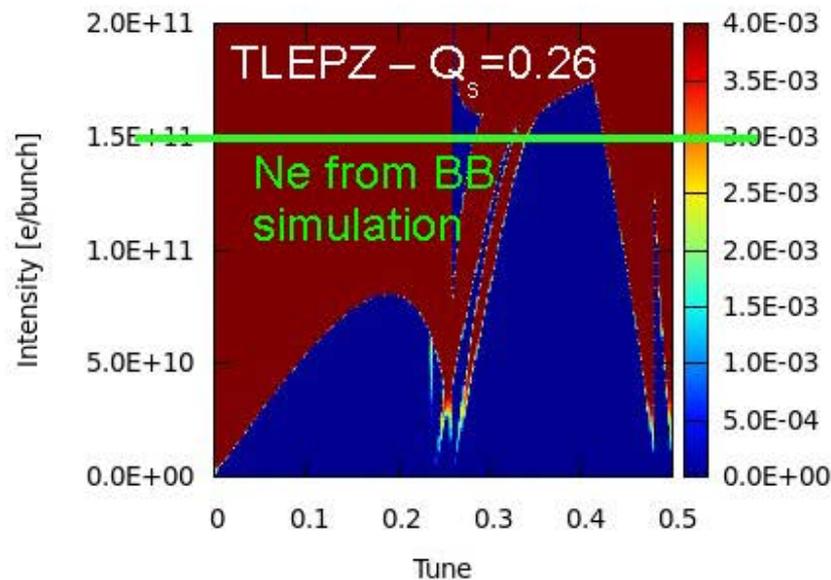

TLEP RF - relevant parameters

Main RF parameters

- Synchrotron radiation power: 50 MW per beam
- Energy loss per turn: 7.5 GeV (at 175 GeV, t)
- Beam current up to 1.4 A (at 45 GeV, Z)
- Up to 7500 bunches of up to 4×10^{11} e per ring.
- CW operation w. top-up operation, **injectors & booster pulsed**

Erk Jensen

First look on basic frequency choice & RF system dimension


- Frequency range (200-800) MHz with 400 MHz starting point
 - **Disadvantage lower frequency:** mechanical stability, *He* amount for cooling, size ...
 - **Disadvantage higher frequency:** denser HOM spectrum (multi-cell), BBU limit, larger impedance, smaller coupler dimensions
- Example scaling from LHC (**per beam**):
 - LHC 400 MHz \rightarrow 2 MV and \sim 250 kW per cavity, (total 8 cavities)
 - **Lepton collider \sim 500 cavities 20 MV / 100 kW RF \rightarrow 10 GV / 50 MW**

R&D issues for FLC SC RF system

- **Low cost, highly efficient RF source**
 - IOT's, magnetrons, diacrodes, solid state amplifiers?
- **Higher Q_0**
 - High temp furnace treatments
 - **Nb₃Sn**
 - MgB₂ or something new?
- **Improved HOM damping** (on-cell dampers?)
 - First tried on ANL crab cavity, plan to try on JLAB MEIC
 - Higher packing factor
- **Reduced cryomodule costs**
 - Cheaper materials, reduced labor

RF power sources – frequency scaling

High efficiency, high power RF sources?

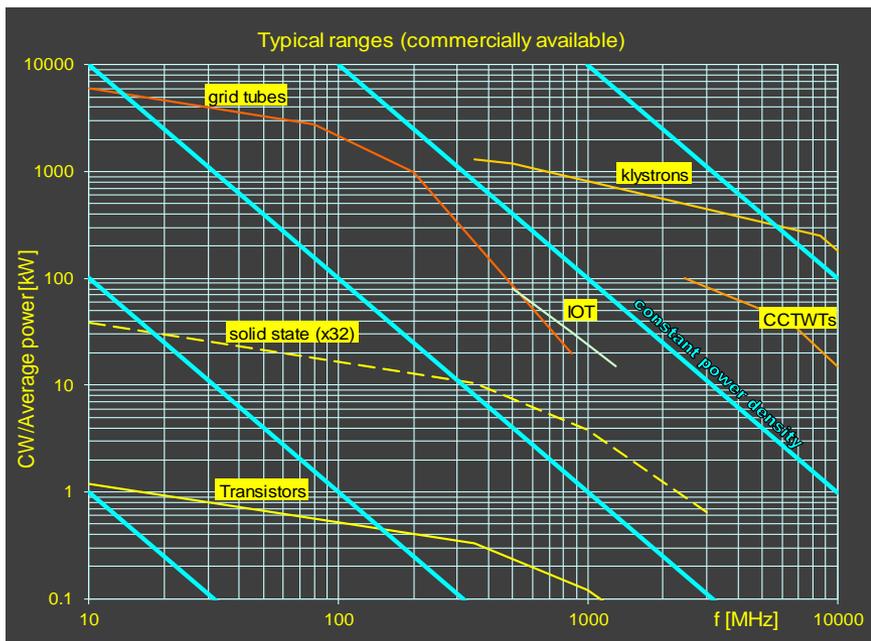

- 200 MHz: Tetrodes, Diacrodes; probably least expensive/MW; efficiency > 70%
- 400 MHz, 800 MHz:
 1. Klystrons: $\eta \sim 65\%$; R&D for larger η has started
 2. IOTs: today limited to < 100 kW; R&D on MB IOT (1.5 MW pulsed) has started with ESS!



Thales 1MW diacrode



LEP 1.3 MW CW klystron



CPI MB-IOT prototype, 1MW, 700MHz

Erk Jensen



potential of Nb_3Sn for SRF cavities

Q(E)-performance of the first two Nb_3Sn -coated 1.5GHz singel-cell cavities

in comparison to pure Nb at 4.2K and 2K

measured by Peter Kneisel at CERN

R&D progressing at JLAB & Cornell

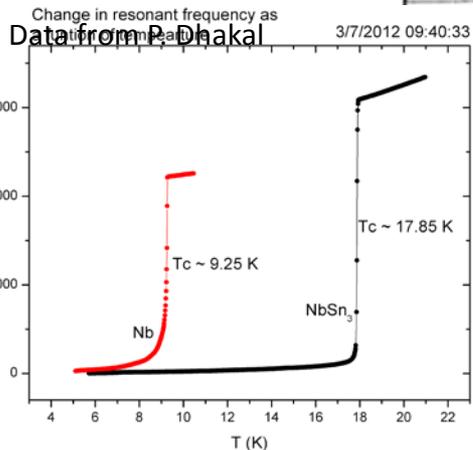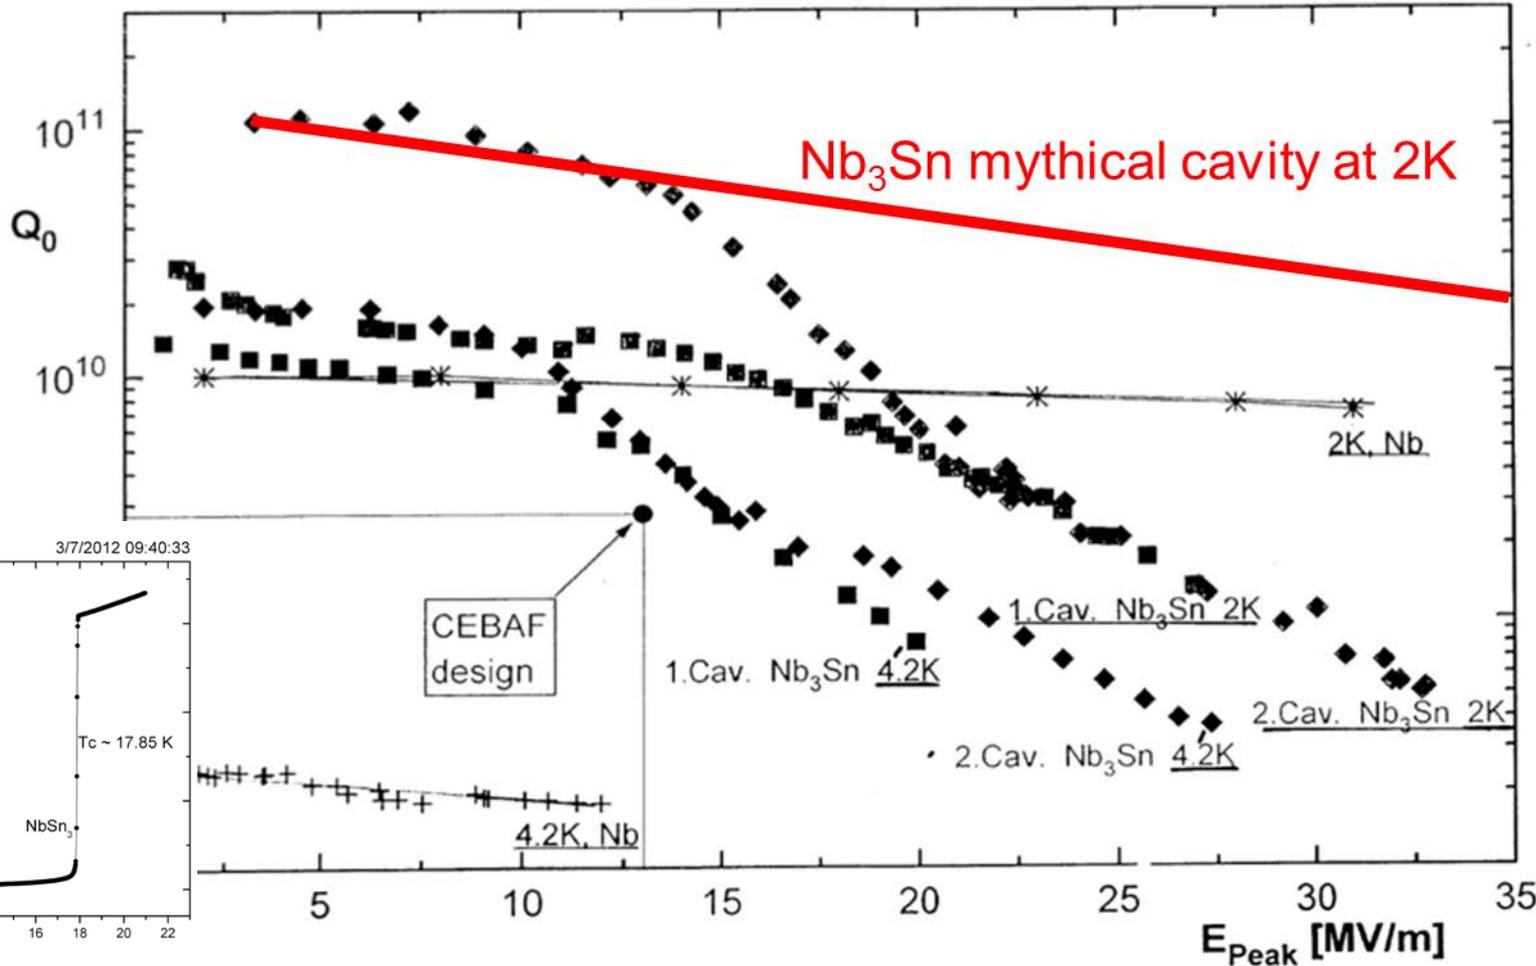

Robert Rimmer, JLAB

Synchrotron Radiation for FLC (*TLEP*)

SR power per unit length ≈ 8 W/cm/beam

compare SLAC PEP-II & SPEAR3: 100 W/cm


critical photon energy $E_c = (3/2)\hbar c\gamma^3/\rho \approx$

0.35 MeV for TLEP-H (240 GeV c.m.)


1.08 MeV for TLEP-t (350 GeV c.m.)

compare LEP-2: 0.82 MeV (1.58 MeV design)

TLEP SR compared with ESRF


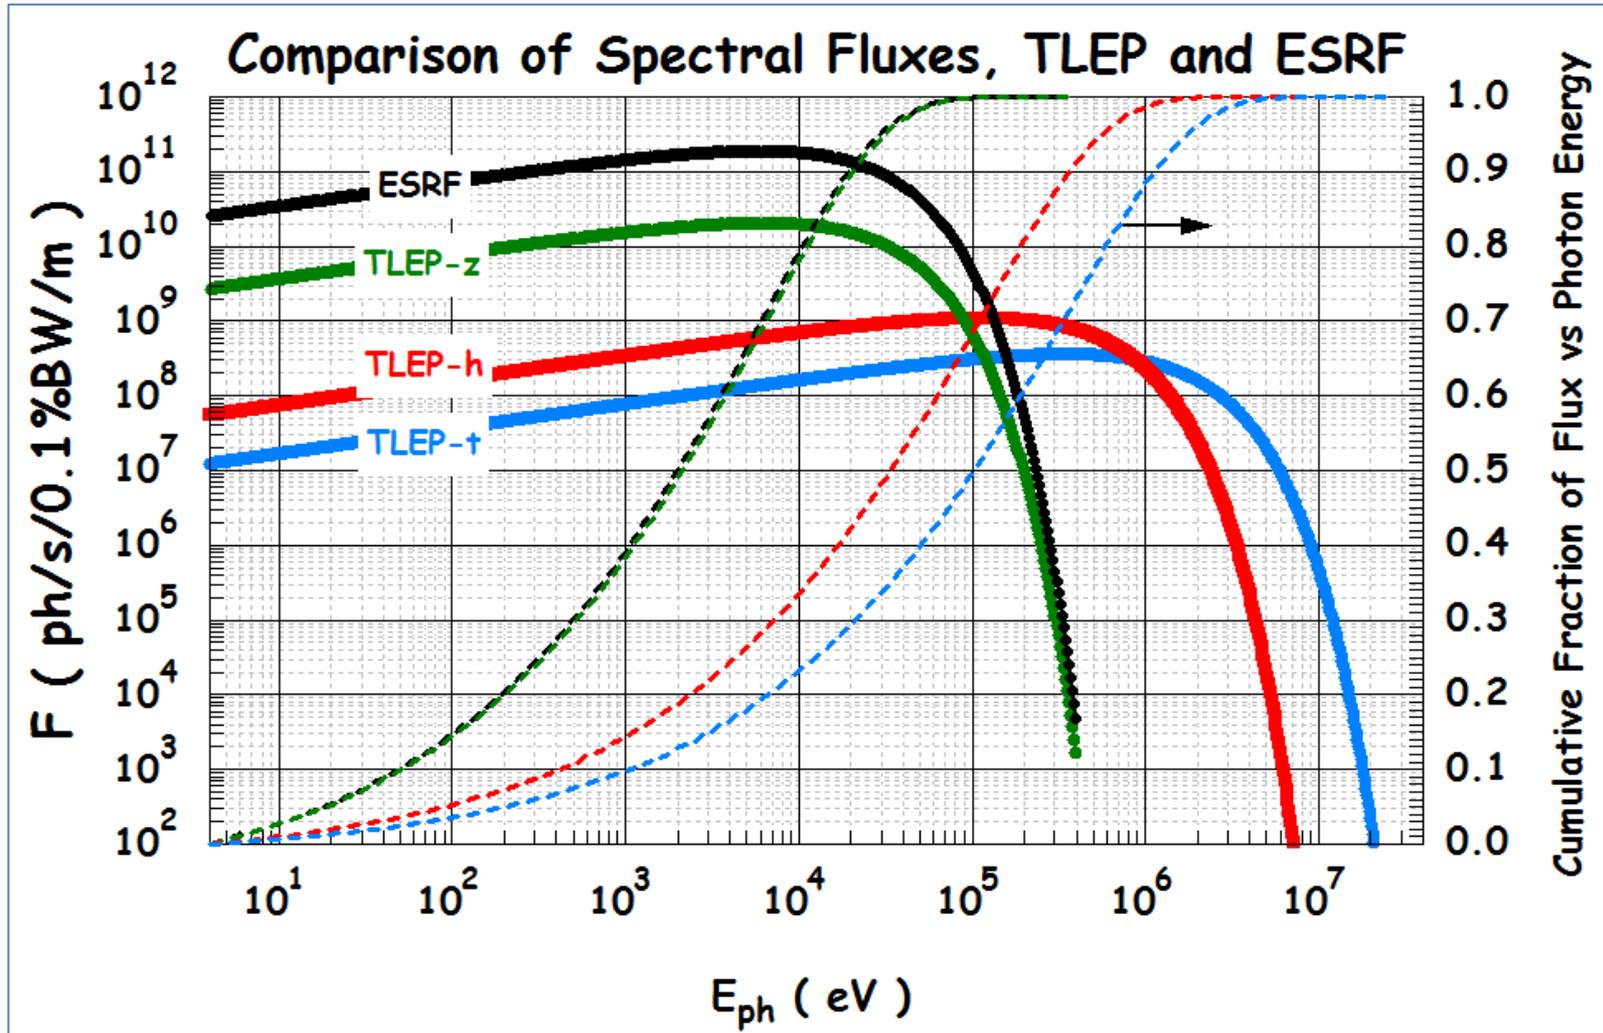


first look at vacuum system

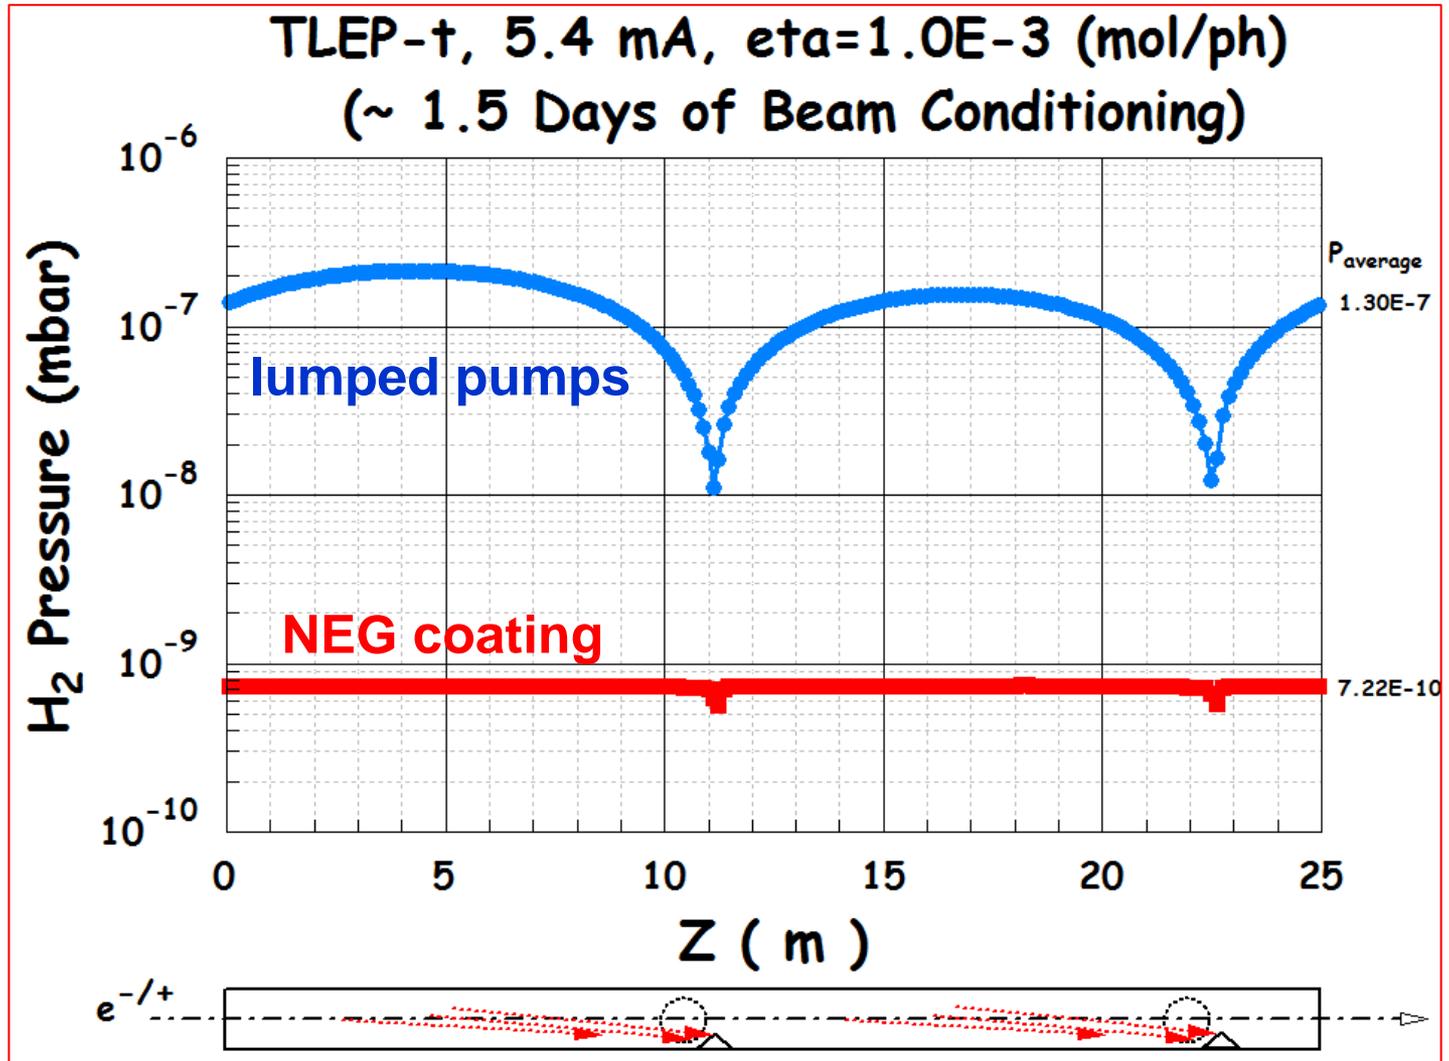

FLUKA model for radiation study


**10.5 m long dipole for
1 beam line**

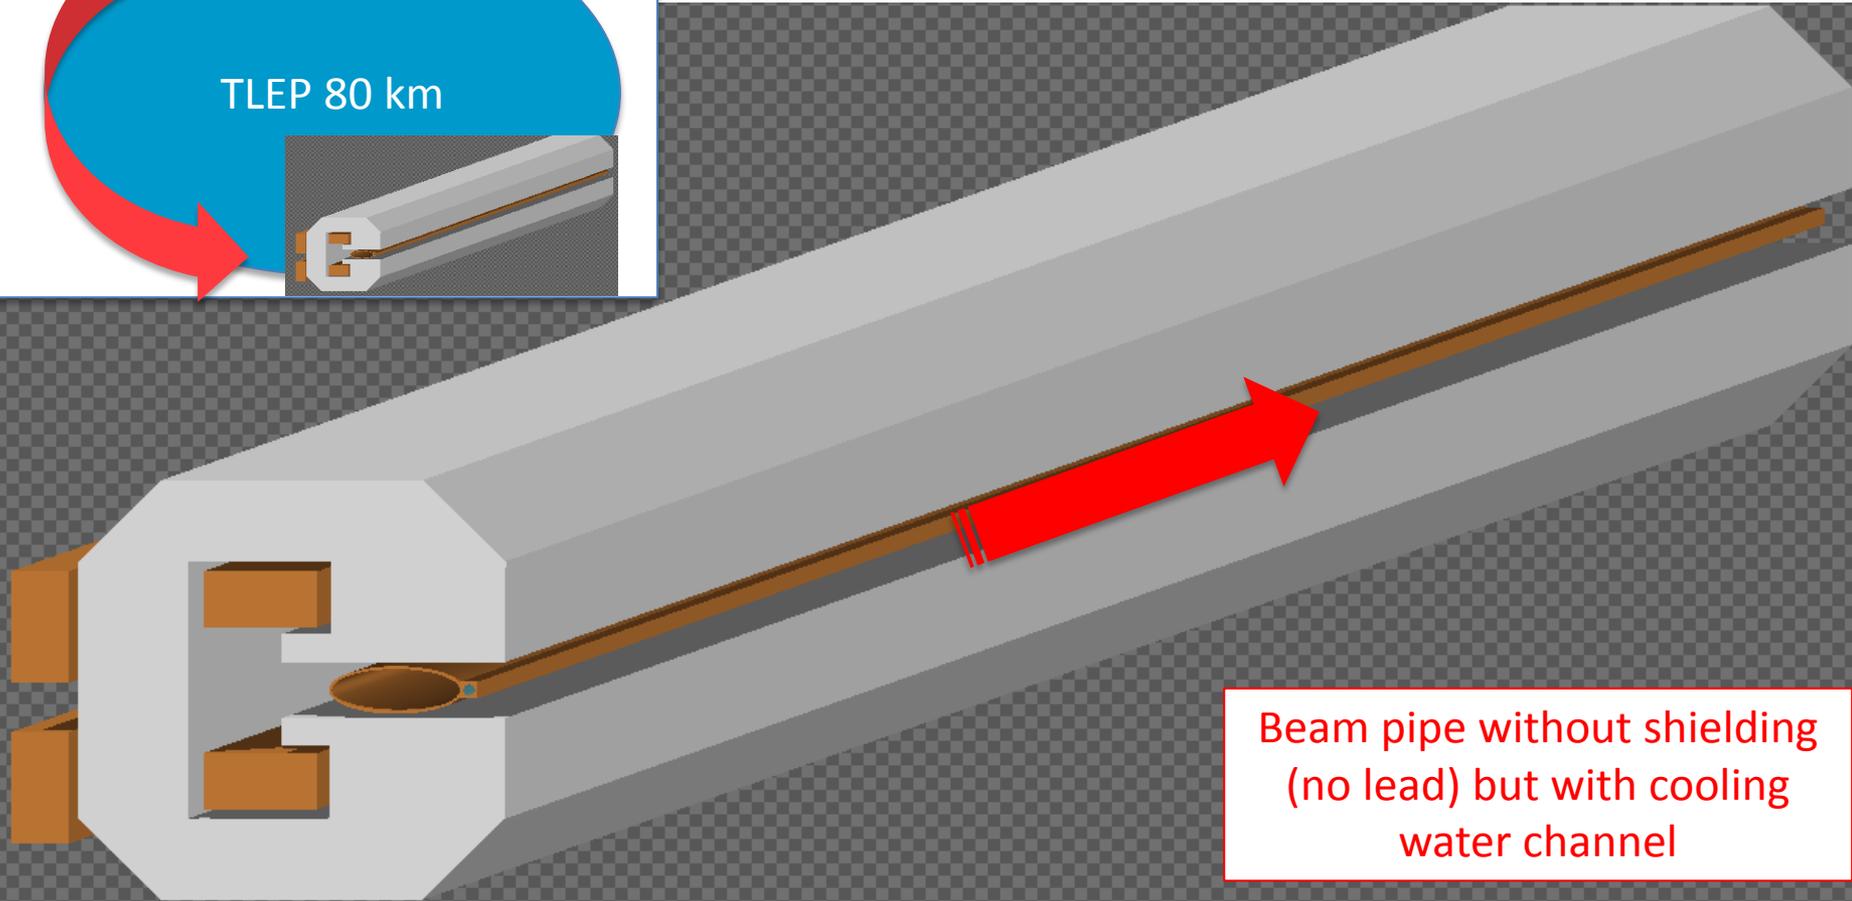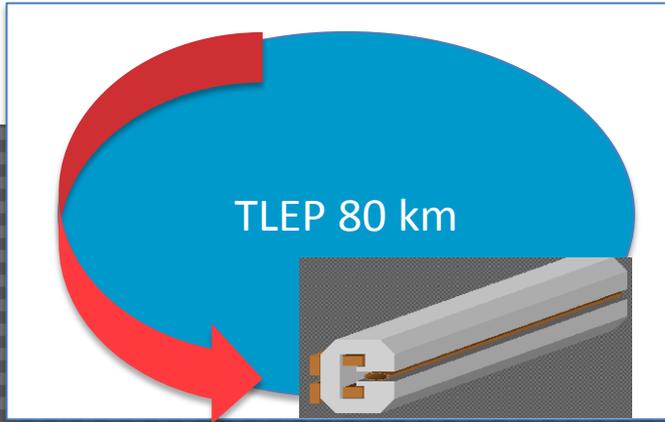


Beam pipe without shielding
(no lead) but with cooling
water channel

heating of cooling water

- Power in H₂O for all absorbers: 14.7 W (shield) & 4.5 W (no shield)
- Power in H₂O for all magnets: 6.7 W (shield) & 87 W (no shield)

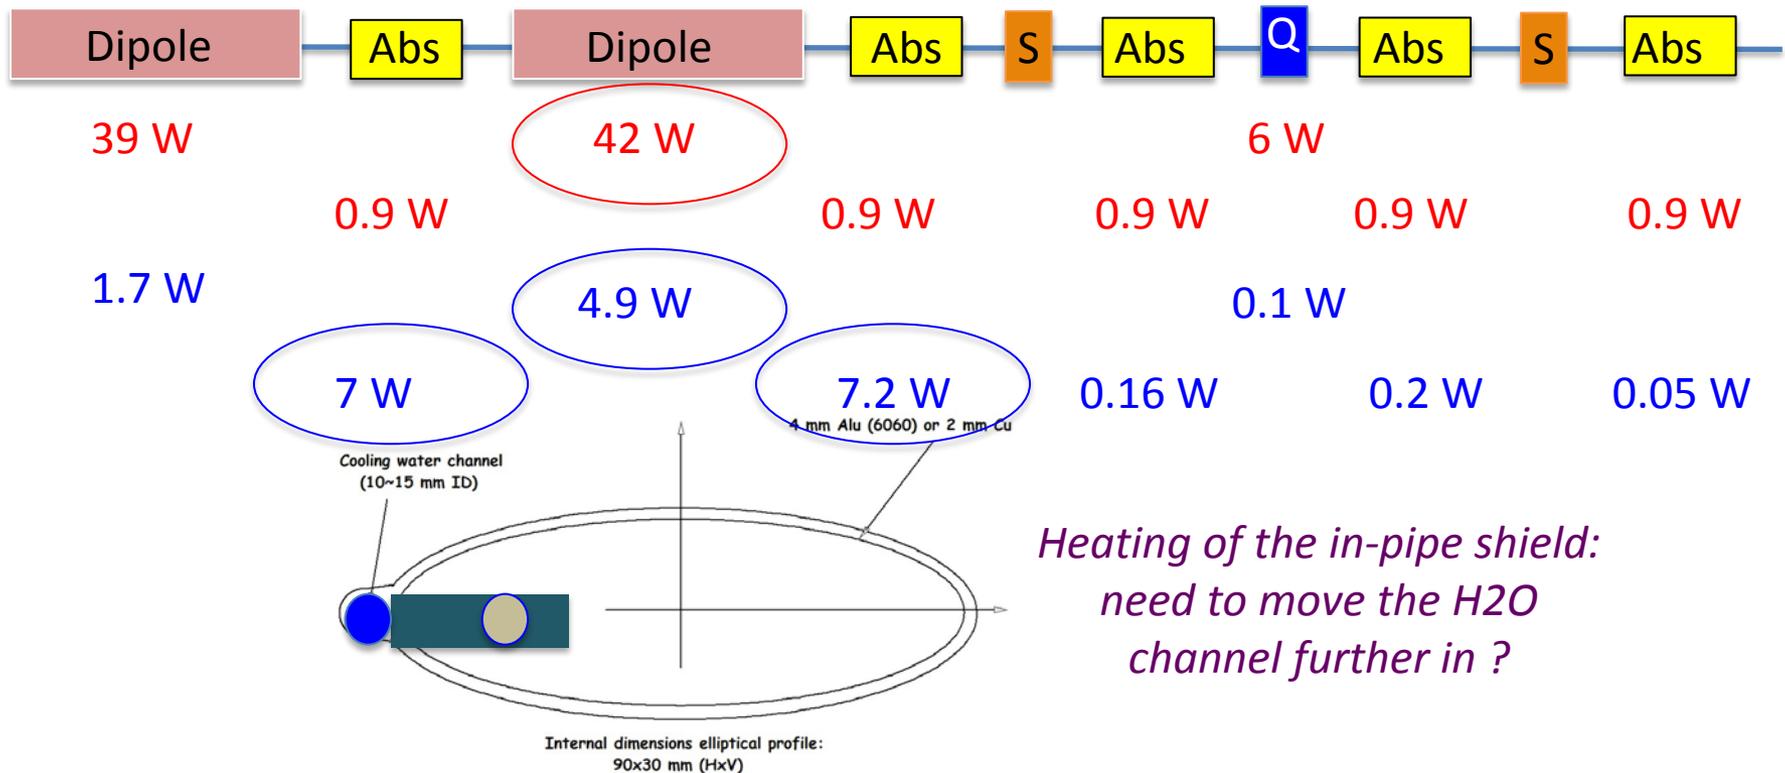

peak dose on the coils

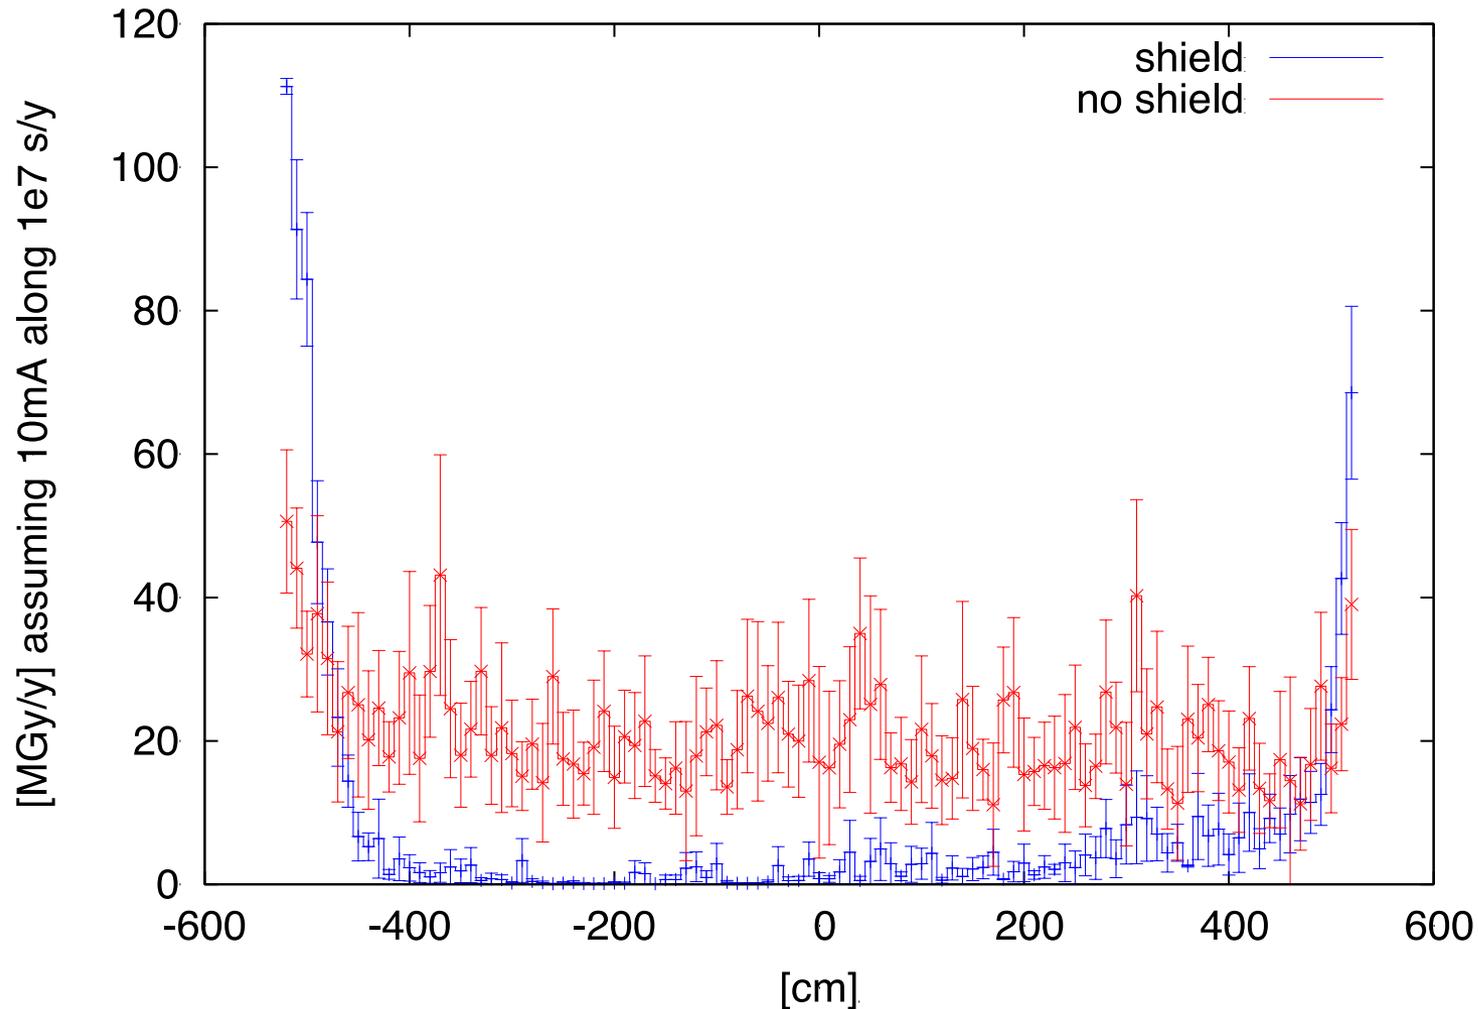


ozone production
to be looked at

polarization

A. Blondel


LEP

observations
+ model predictions

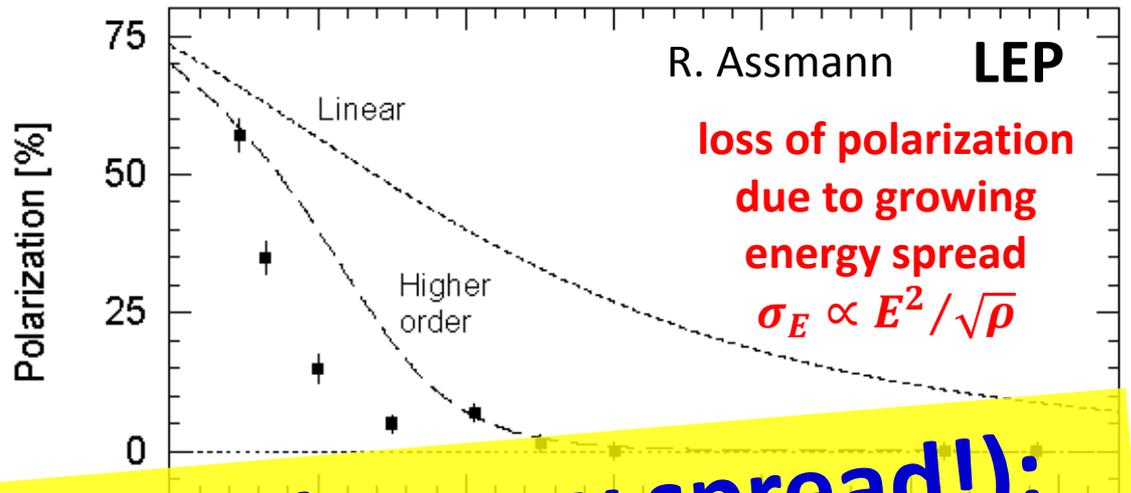

polarization scaling (energy spread!):
LEP at 61 GeV → TLEP at 81 GeV


→ 100 keV beam energy calibration by resonant depolarization (using pilot bunches) around Z peak and W pair threshold:
 $\Delta m_Z \sim 0.1 \text{ MeV}$, $\Delta \Gamma_Z \sim 0.1 \text{ MeV}$, $\Delta m_W \sim 0.5 \text{ MeV}$

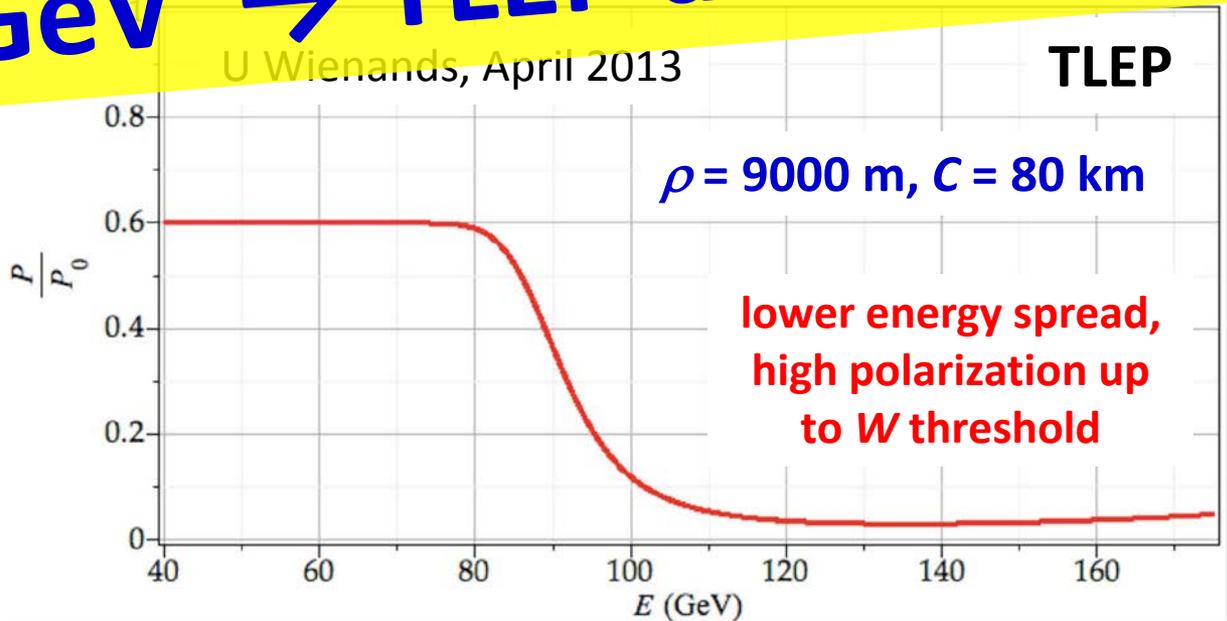

Main Parameters for FLHC (VLHeC)

- Beam energy e^\pm 60, 120, (250) GeV
- Beam energy p 50 TeV
- Spot size set by p ($6 \times 3 \mu\text{m rms}$)
- e^- current from FLC (SR power ≤ 50 MW)
- #IPs 1
- Luminosity $2 \times 10^{35} \text{ cm}^{-2}\text{s}^{-1}$ at 60 GeV E_e
 $10^{34} \text{ cm}^{-2}\text{s}^{-1}$ at 120 GeV E_e
 $\sim 10^{33} \text{ cm}^{-2}\text{s}^{-1}$ at 250 GeV E_e




possible long-term strategy

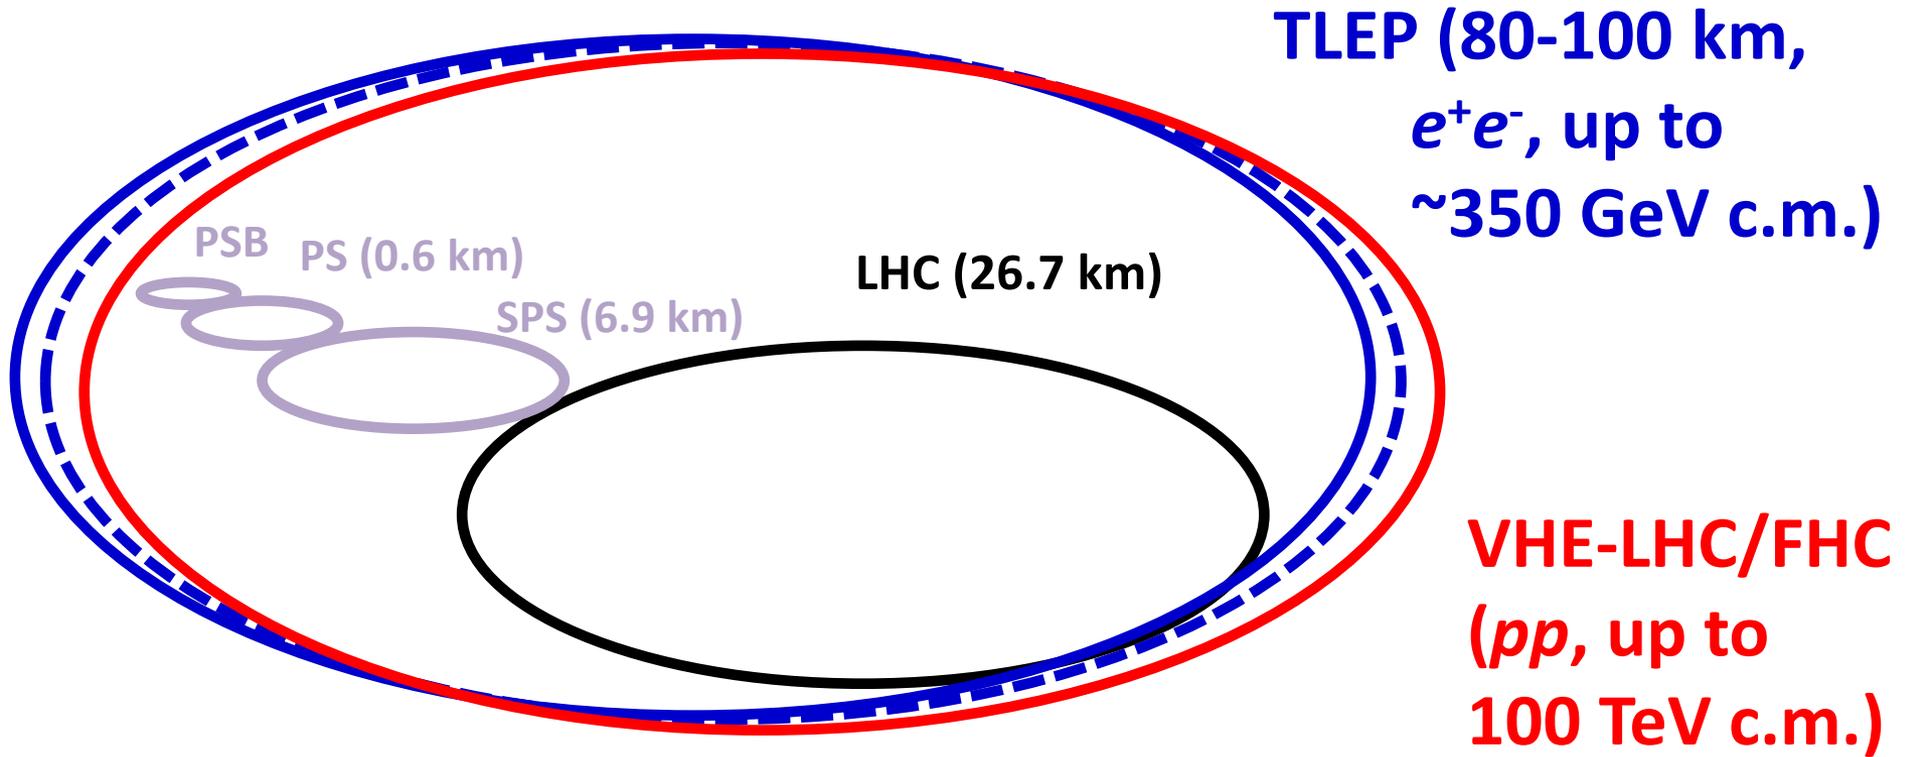


& e^{\pm} (120 GeV) – p (7, 16 & 50 TeV) collisions ([V]HE-]TLHeC)

≥50 years of e^+e^- , pp , ep/A physics at highest energies

a tentative time line

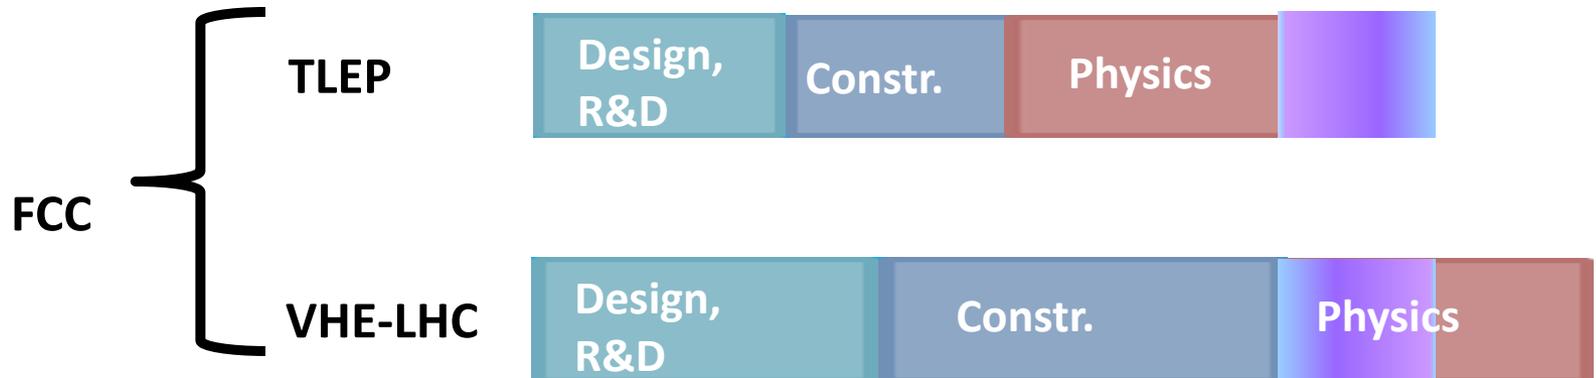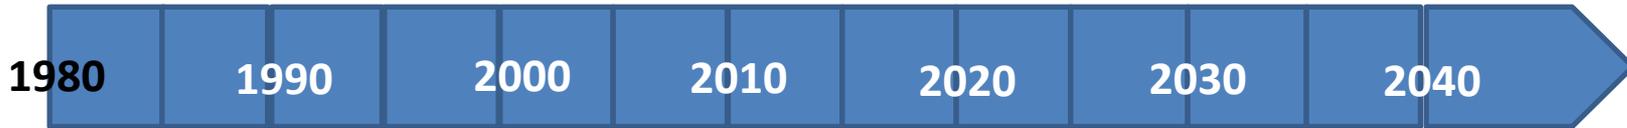

FCC official study milestones

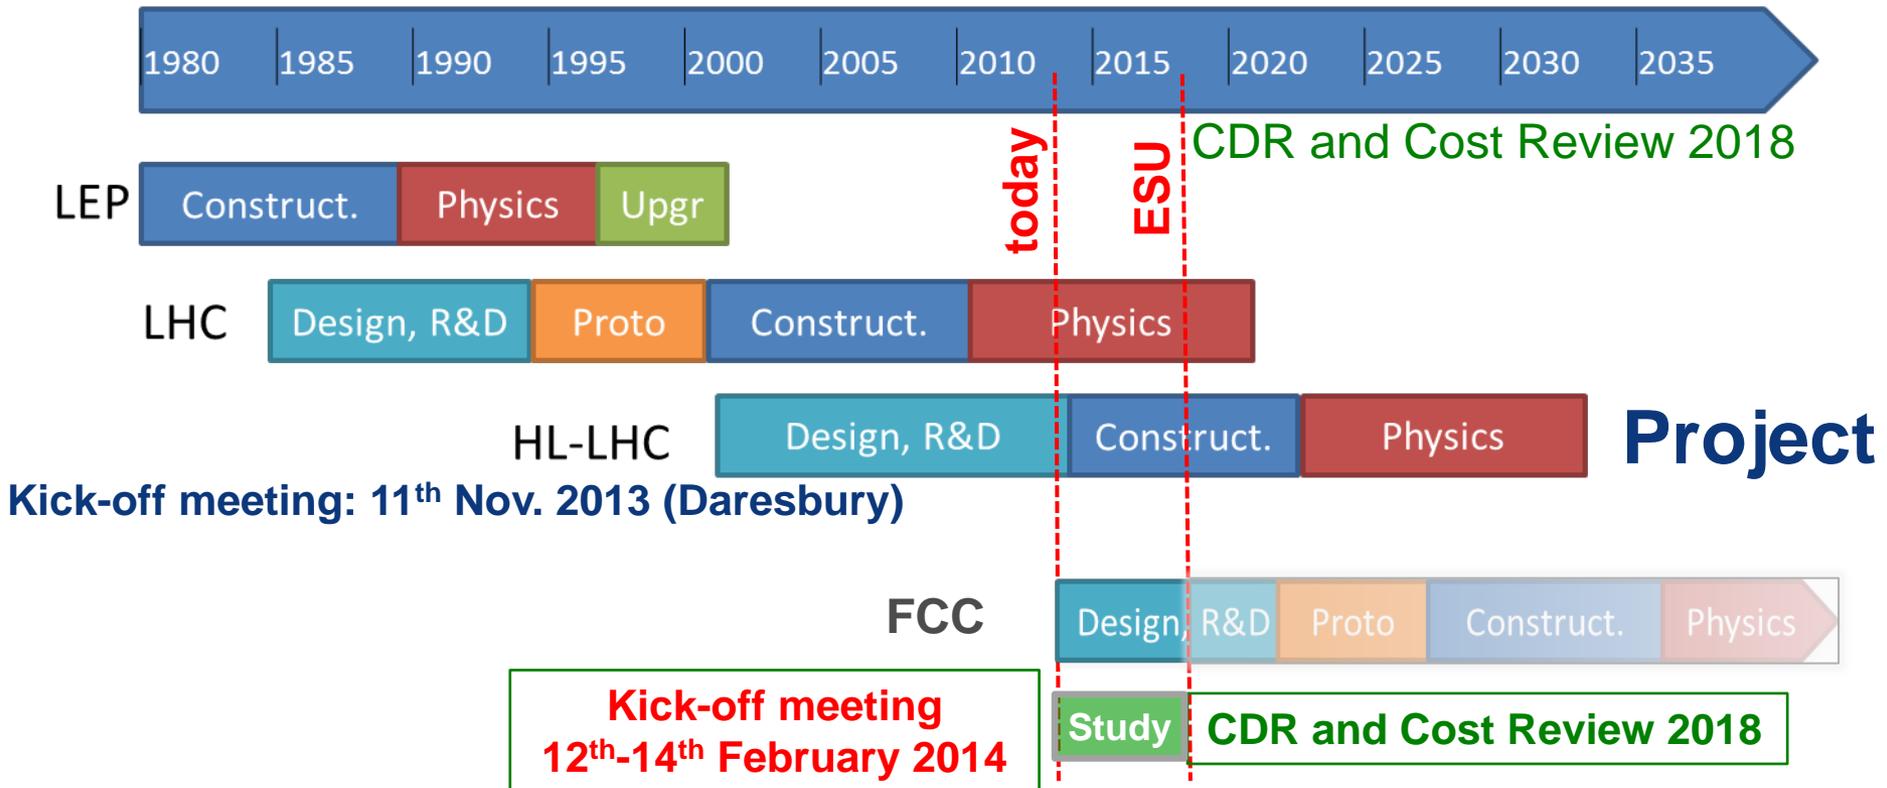

FCC Summary

- CERN is undertaking an international study for the design of future circular colliders (FCC) in the 100 km range
- CDR and cost review for next ESU (2018)
- Main emphasis on hadron collider (FHC) with 100 TeV cm at the energy frontier, determining the infrastructure
- Study will also consider an e^+e^- collider (TLEP/FLC) as potential intermediate step, and look at an e-p option.
- **FCC kick-off meeting 12-15 February 2014 in Geneva University**
 - *Establish international collaborations*
 - *Define WPs and set-up study groups*
 - *International Advisory Committee (IAC)*
- **Collaboration with CepC/SppC/IHEP design study much welcome & important to make progress!**

thank you for your attention!

C.E.P.C

F.C.C

TLEP/FLC past events & references

A. Blondel, F. Zimmermann, ["A High Luminosity \$e^+e^-\$ Collider in the LHC Tunnel to study the Higgs Boson,"](#) arXiv:1112.2518v1, 24.12.'11

K. Oide, *"SuperTRISTAN - A possibility of ring collider for Higgs factory,"*
KEK Seminar, 13 February 2012

1st EuCARD LEP3 workshop, CERN, 18 June 2012

A. Blondel et al, ["LEP3: A High Luminosity \$e^+e^-\$ Collider to study the Higgs Boson,"](#)
arXiv:1208.0504, submitted to ESPG Krakow

P. Azzi et al, ["Prospective Studies for LEP3 with the CMS Detector,"](#)
arXiv:1208.1662 (2012), submitted to ESPG Krakow

2nd EuCARD LEP3 workshop, CERN, 23 October 2012

P. Janot, ["A circular \$e^+e^-\$ collider to study \$H\(125\)\$,"](#) PH Seminar, CERN, 30 October 2012

ICFA Higgs Factory Workshop: Linear vs Circular, FNAL, 14-16 Nov. '12

A. Blondel, F. Zimmermann, ["Future possibilities for precise studies of the \$X\(125\)\$ Higgs candidate,"](#) CERN Colloquium, 22 Nov. 2012

3rd TLEP3 Day, CERN, 10 January 2013

[4th TLEP mini-workshop, CERN, 4-5 April 2013](#)

[5th TLEP mini-workshop, 25-26 July 2013, Fermilab](#)

[6th TLEP workshop \(TLEP6\), CERN, 16-18 Oct. 2013](#) <http://cern.ch/accnet>

<http://tlep.web.cern.ch>

<http://cern.ch/xbeam>

VHE-LHC/FHC past events & references

R. Assmann, R. Bailey, O. Brüning, O. Dominguez, G. de Rijk, J.M. Jimenez, S. Myers, L. Rossi, L. Tavian, E. Todesco, F. Zimmermann, [“First Thoughts on a Higher-Energy LHC,”](#) CERN-ATS-2010-177

E. Todesco, F. Zimmermann (eds), [“EuCARD-AccNet-EuroLumi Workshop: The High-Energy Large Hadron Collider,”](#) Proc. EuCARD-AccNet workshop HE-LHC’10 , Malta, 14-16 October 2010, arXiv:1111.7188 ; CERN Yellow Report CERN-2011-003

[HiLumi LHC WP6 HE-LHC](#)

[Joint Snowmass-EuCARD/AccNet-HiLumi meeting `Frontier Capabilities for Hadron Colliders 2013,`](#) CERN, 21-11 February 2013

<http://hilumilhc.web.cern.ch/HiLumiLHC/activities/HE-LHC/WP16/>

<https://cern.ch/accnet>

Additional slides

parameters	TLEP Z	TLEP W	TLEP H	TLEP t	
$E_{\text{c.m.}}$ [GeV]	91	160	240	350	
beam current [mA]	1440	154	29.8	6.7	
# bunches/beam	7500	3200	167	160	20
# e^- /bunch [10^{11}]	4.0	1.0	3.7	0.88	7.0
$\varepsilon_x, \varepsilon_y$ [nm]	29.2, 0.06	3.3, 0.017	7.5, 0.015	2, .002	
$\beta_{x,y}^*$ [mm]	500, 1	200, 1	500, 1	1000, 1	
$\sigma_{x,y}^*$ [μm]	121, 0.25	26, 0.13	61, 0.12	45,.045	126,.13
$\sigma_{z,\text{rms}}^{\text{tot}}$ [mm] (w BS)	2.93	1.98	2.11	0.77	1.95
$E_{\text{loss}}^{\text{SR}}$ /turn [GeV]	0.03	0.3	1.7	7.5	
$V_{\text{RF,tot}}$ [GV]	2	2	6	12	
$\xi_{x,y}/\text{IP}$	0.068	0.086	0.094	0.057	
\mathcal{L}/IP [$10^{34}\text{cm}^{-2}\text{s}^{-1}$]	59	16	5	1.3	1.0
#IPs	4	4	4	4	
τ_{beam} [min] (rad.Bhabha)	99	38	24	21	26
τ_{beam} [min] (BS, $\eta=2\%$)	$>10^{25}$	$>10^6$	9	3.5	0.5


parameters	LEP2	TLEP W	TLEP H	TLEP t	
$E_{c.m.}$ [GeV]	209	160	240	350	
beam current [mA]	4	154	29.8	6.7	
# bunches/beam	4	3200	167	160	20
# e^- /bunch [10^{11}]	5.8	1.0	3.7	0.88	7.0
$\varepsilon_x, \varepsilon_y$ [nm]	48, 0.25	3.3, 0.017	7.5, 0.015	2, 0.02	2, 0.02
$\beta_{x,y}^*$ [mm]	1500, 50	200, 1	500, 1	1000, 1	1000, 1
$\sigma_{x,y}^*$ [μm]	270, 3.5	26, 0.13	61, 0.12	45, 0.45	120, 0.13
$\sigma_{z,rms}^{\text{tot}}$ [mm] (w BS)	16.1	1.98	2.11	0.77	1.95
$E_{\text{loss}}^{\text{SR}}$ /turn [GeV]	3.41	0.3	1.7	7.5	7.5
$V_{\text{RF,tot}}$ [GV]	3.64	2	6	12	12
$\xi_{x,y}^{\varepsilon}$ /IP	0.066 (y)	0.086	0.094	0.057	0.057
\mathcal{L} /IP [$10^{34}\text{cm}^{-2}\text{s}^{-1}$]	0.0125	16	5	1.3	1.0
#IPs	4	4	4	4	4
τ_{beam} [min] (rad.Bhabha)	363	38	24	21	26
τ_{beam} [min] (BS, $\eta=2\%$)	$>10^{35}$	$>10^6$	9	3.5	0.5

com-
parison
with
LEP2

parameters	TLEP W	TLEP H	TLEP t		ZHH&ttH
$E_{c.m.}$ [GeV]	160	240	350		500
beam current [mA]	154	29.8	6.7		1.6
# bunches/beam	3200	167	160	20	10
# e^\pm /bunch [10^{11}]	1.0	3.7	0.93	7.0	3.3
$\varepsilon_x, \varepsilon_y$ [nm]	3.3, 0.017	7.5, 0.015	2, .002		4., 0.004
$\beta_{x,y}^*$ [mm]	200, 1	500, 1	1000, 1		1000, 1
$\sigma_{x,y}^*$ [μm]	26, 0.13	61, 0.12	45, 0.45	126, .13	63, 0.063
$\sigma_{z,rms}^{\text{tot}}$ [mm] (w BS)	1.98	2.11	0.77	1.95	1.81
$E_{\text{loss}}^{\text{SR}}$ /turn [GeV]	0.3	1.7	1.5		31.4
$V_{\text{RF,tot}}$ [GV]	2	6	12		35
$\xi_{x,y}/\text{IP}$	0.086	0.094	0.057		0.075
\mathcal{L}/IP [$10^{34}\text{cm}^{-2}\text{s}^{-1}$]	16	5	1.3	1.0	0.5
#IPs	4	4	4		4
τ_{beam} [min] (rad.B)	38	24	21	26	13
τ_{beam} [min] (BS, $\eta=2\%$)	$>10^6$	9	3.5	0.5	~ 1 ($\eta=3\%$)

TLEP
energy
upgrade?

Top-up scheme

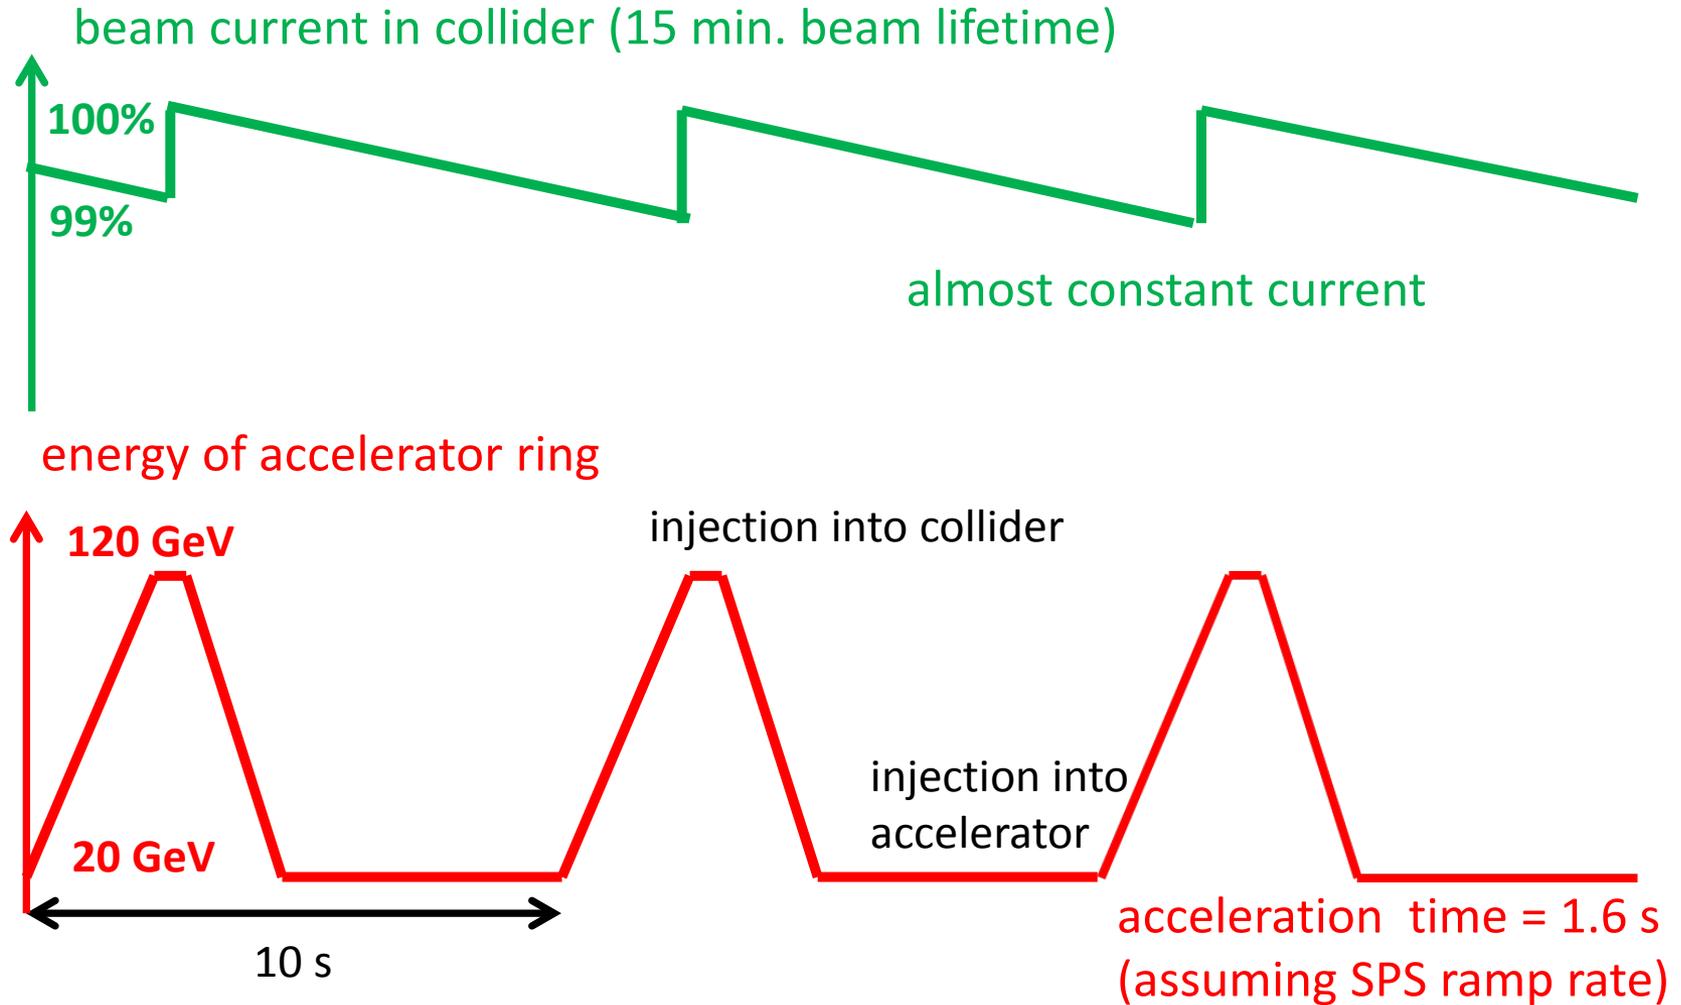

parameters for *FHLC*

collider parameters	e^\pm scenarios			protons
species	e^\pm	e^\pm	e^\pm	p
beam energy [GeV]	60	120	250	50000
bunch spacing [μ s]	0.125	2	33	0.125 to 33
bunch intensity [10^{11}]	3.8	3.7	3.3	3.0
beam current [mA]	477	29.8	1.6	384 (max)
rms bunch length [cm]	0.25	0.21	0.18	2
rms emittance [nm]	6.0, 3.0	7.5, 3.75	4, 2	0.06, 0.03
$\beta_{x,y}^*$ [mm]	5.0, 2.5	4.0, 2.0	9.3, 4.5	500, 250
$\sigma_{x,y}^*$ [μ m]	5.5, 2.7			
b-b parameter ξ	0.13	0.050	0.056	0.017
hourglass reduction	0.42	0.36	0.68	
CM energy [TeV]	3.5	4.9	7.1	
luminosity [$10^{34}\text{cm}^{-2}\text{s}^{-1}$]	21	1.2	0.07	

FLC (TLEP) luminosity formulae

$$L = \frac{f_{rev} n_b N_b^2}{4\pi \sigma_x \sigma_y} = (f_{rev} n_b N_b) \left(\frac{N_b}{\varepsilon_x} \right) \frac{1}{4\pi} \frac{1}{\sqrt{\beta_x}} \frac{1}{\sqrt{\beta_y}} \frac{1}{\varepsilon_y / \varepsilon_x}$$

$$(f_{rev} n_b N_b) = \frac{P_{SR} \rho}{8.8575 \times 10^{-5} \frac{\text{m}}{\text{GeV}^{-3}} E^4}$$

SR radiation power limit

$$\frac{N_b}{\varepsilon_x} \approx \frac{\xi_x 2\pi\gamma}{r_e}$$

beam-beam limit

β_x *constrained by beamstrahlung*

$\beta_y (\varepsilon_y / \varepsilon_x)$ *to be reduced as much as possible!*

lifetime limit: rad. Bhabha scattering

beam lifetime $\frac{1}{\tau_b} = \frac{L}{I_{beam}} \sigma n_{IP} e f_{rev}$

at beam-beam limit:

$$\tau_b = \frac{2r_e m_e}{n_{IP} \sigma f_{rev}} \frac{\beta_y}{E_b \xi_y}$$

σ for rad. Bhabha:

$$\frac{d\sigma}{dk} = \frac{4\alpha(r_e)^2}{k} \left[\frac{4}{3} - \frac{4}{3}k + k^2 \right] \left[\log(4\gamma^2) + \log \frac{1-k}{k} - \frac{1}{2} \right]$$

$$\rightarrow \sigma \approx \int_{k_{\min}}^1 \frac{d\sigma}{dk} dk \approx 0.32 \text{ barn}$$


H. Burkhardt, R. Kleiss,
EPAC1994

LEP2: $\tau_{\text{beam,LEP2}} \sim 6 \text{ h}$ ($\sim 30\%$ suppression: $\sigma \sim 0.21 \text{ barn}$)

TLEP **with $L \sim 5 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ at 4 IPs:**



$\tau_{\text{beam,TLEP}} \sim 21 \text{ minutes, unavoidable}$

luminosity of e^+e^- colliders

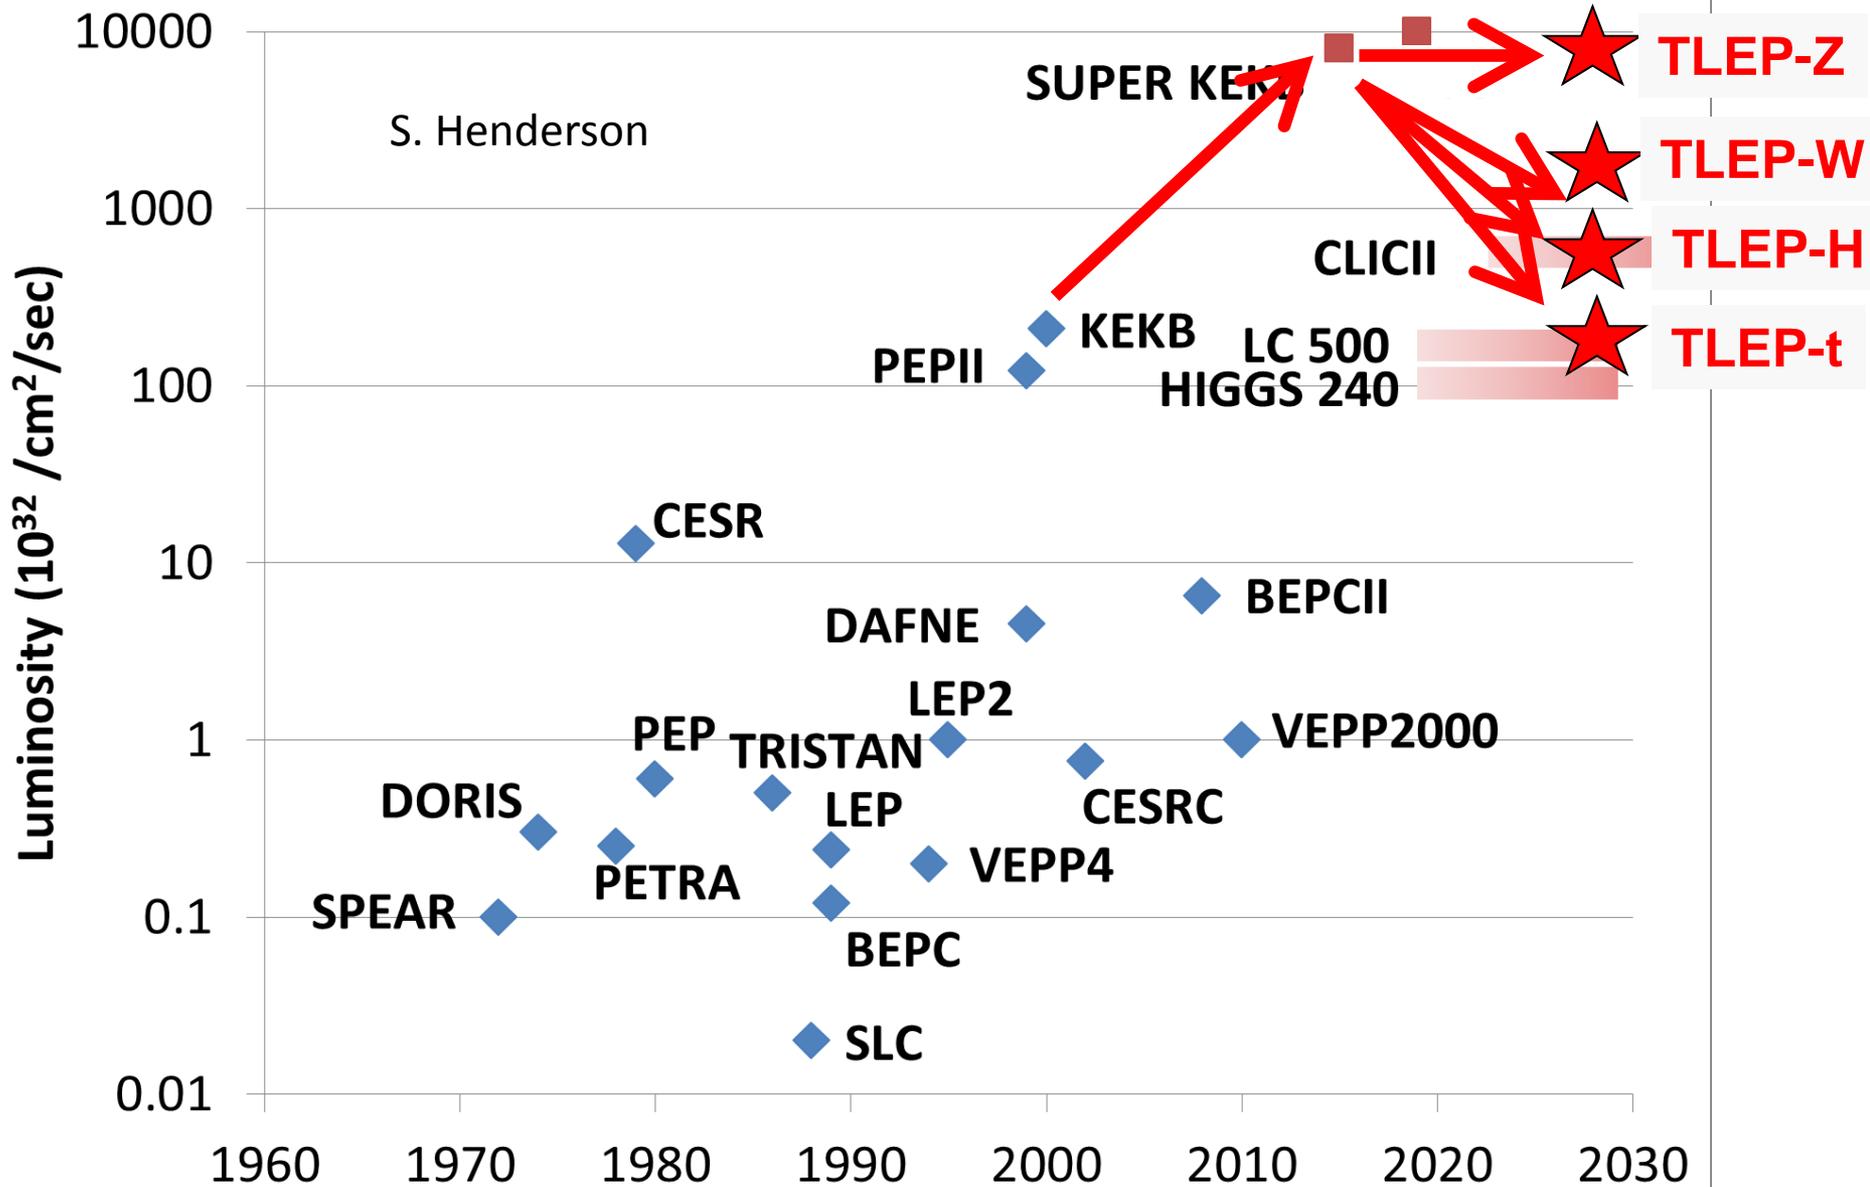

optics – TLEP arc cell

Y. Cai,
B. Holzer,
H. Burkhardt

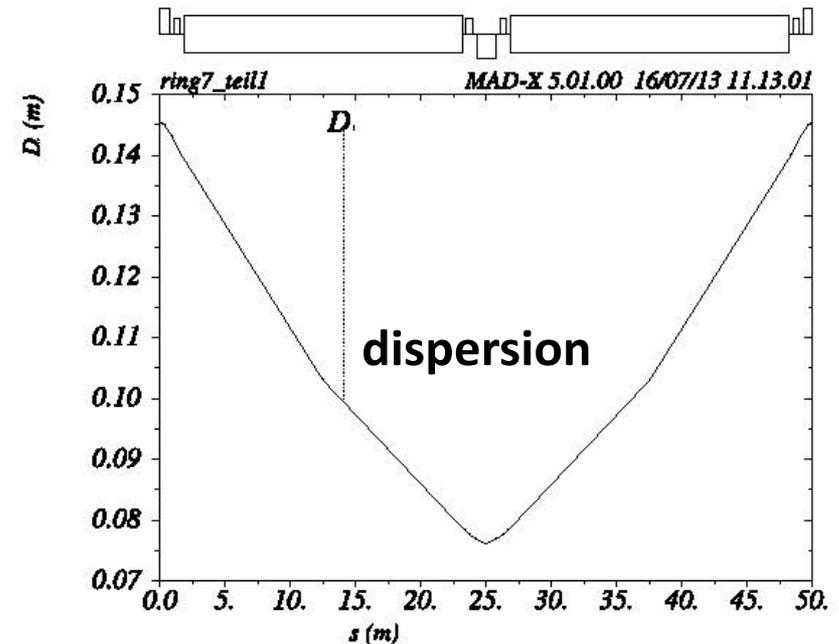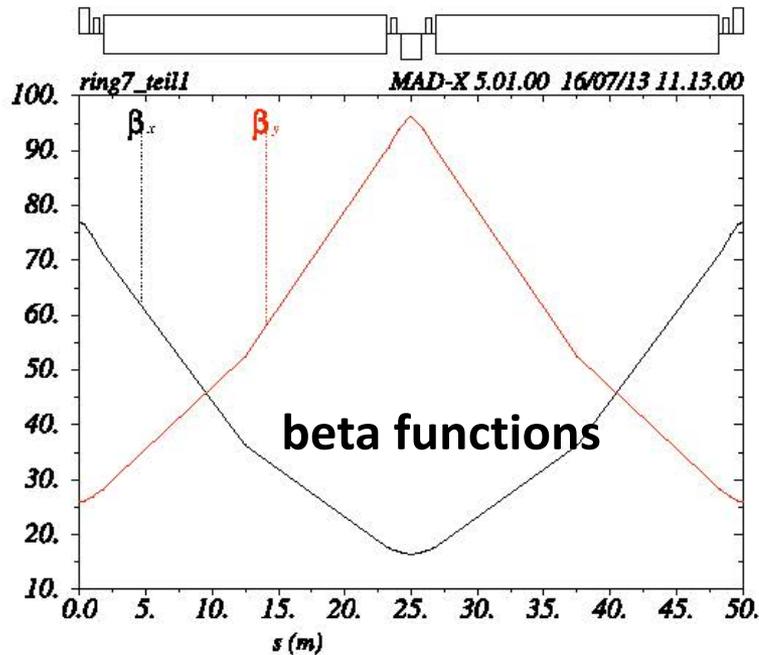

from LEP to TLEP

$\rho=3100$ m, $L_{\text{cell}}=79$ m

$\rho=9100$ m ($C=80$ km), $L_{\text{cell}}=50$ m

$\varepsilon_x=48$ nm at 104.5 GeV \rightarrow $\varepsilon_x=1.5$ nm at 175 GeV

$\varepsilon \propto \gamma^2 \theta^3$: at lower beam energy increase cell length (“ θ ”) x2 or x6!