

CERN-EP/87-62 March 31st, 1987

# LARGE DEPARTURES FROM LANDAU DISTRIBUTIONS FOR HIGH-ENERGY PARTICLES TRAVERSING THIN SI AND Ge TARGETS

J.F.Bak, A.Burenkov\*, J.B.B.Petersen, and E.Uggerhøj
Institute of Physics, University of Aarhus
DK-8000 Aarhus C, Denmark

S.P.Møller<sup>†</sup>

CERN, CH-1211 Geneve 23, Schweiz

P.Siffert

Centre de Recherches Nucleaires, F-67037 Strasbourg, France

(Submitted to Nucl.Phys.B)

\*Visitor from Institute of Applied Physics, Minsk, USSR

†Permanent address: Institute of Physics, University of
Aarhus, DK-8000 Aarhus C, Denmark

#### **ABSTRACT**

Energy loss of 2 and 8 GeV/c positive and negative electrons, pions and protons transmitted through 1040 µm thick germanium and silicon targets are measured using the targets as semiconductor detectors. The measured energy-loss distributions are well-reproduced by calculations, when the binding of the target electrons is taken into account. In particular, the increasing width, up to twice as large as the width of the Landau distribution, and the decreasing most probable energy loss as function of decreasing target thickness, agree with calculations. The same two quantities increase as function of the relativistic by for  $\beta \gamma^{2}$  4 until a saturation is reached for very large values of βγ. The constancy of the Fermi plateau, the saturation value of the most probable energy loss, is confirmed to the per-cent level for the considered values and thicknesses.

#### I. INTRODUCTION

The present work is concerned with the energy lost by highenergy charged particles when traversing solid matter. We shall only consider the ionization energy loss stemming from excitation and ionization of target atoms. Since the energy is lost in quanta, fluctuations in the energy loss will exist, and the energy-loss process is described by a distribution function.

Collisions are usually divided into "close" and "distant" collisions, with a dividing impact parameter of the order of the size of the atom. These names are of classical origin, since the impact parameter is not always well defined quantum-mechanically. In a quantum-mechanical treatment, the momentum transfer is used to classify the collisions, but the terms "close" and "distant" are still used in the sense, that the impact parameter b is related to a momentum transfer q by the "uncertainty relation", b ~ M/q.

In a classical impact parameter description, the average energy loss is roughly proportional to the logarithm of the ratio between the maximum and the minimum impact parameter. maximum impact parameter for distant collisions increases proportional to  $\gamma$ , and a logarithmic rise with  $\gamma$  of the loss is expected. For  $\gamma$ >>1 the maximum impact parameter is large compared to atomic dimensions, and in a dense material, the presence of atoms between the projectile and the interacting atom saturates the electromagnetic field in the medium due to polarization of these atoms. This density effect results in a saturation of distant collisions. Another lny increase in average energy loss exists due to the increase in the maximum energy transfer with  $\gamma$ . This maximum energy transfer, does not influence the most probable energy loss, which is only dependent on distant collisions and saturate at the so-called Fermi plateau at high values of \( \gamma \).

The energy-loss distribution is for relativistic particles given by a Gaussian-like function with a high-energy tail, stemming from large, but infrequent, energy transfers from close collisions. When the energy loss is very large compared to the binding energy of the target electrons, the width of the

distribution is only dependent on the number of electrons and not on their binding energy. The distribution function is then given by the Landau function. For thin targets, where the energy loss is comparable to or smaller than the binding energy of inner-shell electrons, the energy-loss distribution is broader than when the electronical binding energy is neglected.

The present investigations are exactly concerned with this region of thicknesses, and the electronical binding energies have to be taken into account. In thin targets the reduction of projectile energy when traversing the target can not be measured directly, because the energy loss is extremely small compared to the projectile energy. However, when the target is a semiconductor detector, the energy deposited in the target can be measured, and this deposited energy loss is in fact closely related to the energy loss. The experiments have thus been restricted to silicon and germanium targets.

This work is in part motivated by earlier work, where a broadening of the energy-loss distribution was observed<sup>23</sup>, in part by the increasing use of thin semiconductor detectors in high-energy physics for the detection of relativistic particles. These detectors are used mainly as position-sensitive (strip- or CCD-) detectors, often as active, "live", targets. The strip-detectors have thicknesses of a few hundred microns, whereas the CCD-detectors are very thin (some tens of microns). Although much work, both theoretically and experimentally, has been made for gaseous targets (see., e.g., ref.3 and references therein), very few investigations have been made for solid targets. A theoretical part, chapter II, giving the necessary outline followed by a discussion of the experimental the theory, is procedure in chapter III. The experimental results are presented in chapter IV, which also contains the discussion and the comparison with the model calculations.

#### II. THEORY

In this section the models are discussed with which the experimental results are compared. Normally the energy loss of relativistic particles is calculated quantum-mechanically, resulting in the Bethe-formula with various corrections, see, e.g., (ref.1). An energy-loss cross section which is needed to calculate the energy-loss distribution is, however, not easily obtained from this formulation. So a semiclassical calculation is set up starting with a simple model for the energy-loss cross section. This calculation gives the same average energy loss as the Bethe formula.

## A. Semiclassical energy loss calculation

In this  $model^2$ , the target material is treated as a homogeneous, and isotropic medium with electromagnetic properties described by a dielectric function  $\epsilon$ . The mean energy loss per unit path length is found as the effect of the electric field,  $\vec{E}$ , set up in the medium due to the presence of the charged projectile moving with velocity  $v=\beta c$ . This field exerts work on the projectile giving

$$\frac{dE}{dx} = \frac{e\vec{E}(\beta ct, t) \vec{\beta}}{\beta} . \tag{1}$$

This can be rewritten by solving Maxwells equations for the Fourier transformed fields

$$-\frac{dE}{dx} = -\frac{e^2 i}{\beta^2 \pi} \int_{-\infty}^{\infty} w dw \int_{|w|/v}^{\infty} k dk \left[ \frac{k^2 c^2}{\epsilon w^2 - k^2 c^2} - \frac{1}{k^2 c^2 \epsilon} \right]. \tag{2}$$

Now  $\varepsilon=\varepsilon(k,w)$ , and the Fourier-variables w and k are interpreted as the energy and momentum transfer, in units of N. The first term describes transverse excitations and the second longitudinal ones. In general the dielectric function for transverse and longitudinal excitations entering the first and the second term in eq.(2), respectively, differ  $^4$ . However in non-magnetic materials, they coincide. In any case significant

contributions to the transverse term only comes for  $\varepsilon w^2 \simeq k^2 c^2$ , i.e., in a narrow region above the lower integration limit. For the free electron gas and high projectile velocities the longitudinal and the transverse dielectric function are almost equal in this region. Furthermore, for these small k-values the dipole approximation is valid and we set  $\varepsilon(w,k)=\varepsilon(w,0)\equiv\varepsilon(w)$  in the integration of the first term, and obtain the result for the transverse contribution

$$-\left(\frac{dE}{dx}\right)_{\perp} = \frac{e^{2}}{\pi v^{2}} \left\{ \int_{0}^{\infty} w dw Im \left[ -\frac{1}{\epsilon (w)} \right] ln \frac{\gamma^{2} w^{2}}{\left(w^{2} + l^{2}\right)} + \frac{l^{2}}{w_{p}^{2} \gamma^{2}} - \beta^{2} \right\}$$
(3)

where l is the single root of the equation

$$1 - \beta^2 \varepsilon(il) = 0. \tag{4}$$

As will be seen later, l determines the density effect. When  $1-\beta^2 \epsilon(0) \ge 0$ , there is no density effect, l=0. Also the longitudinal contribution can be expressed in terms of  $Im(1/\epsilon)$ 

$$\left(-\frac{dE}{dx}\right)_{\mid \mid} = \frac{2e^2}{\pi v^2} \int_0^\infty w dw \int_w^\infty / v \frac{dk}{k} Im \left(\frac{-1}{\epsilon(k, w)}\right)$$
 (5)

but to perform the k-integration a model for  $\epsilon(k, w)$  is needed. It is though, possible to integrate the above equation by first integrating over w at constant k, by using the sum rule

$$\int_{0}^{\infty} \omega d\omega Im(-1/\epsilon) = \pi/2 \omega_{p}^{2} . \tag{6}$$

However, since we shall need to quantize our expression for the energy loss, when integrated over k, to get an energy-loss cross section, a model for  $\epsilon(k,\omega)$  is introduced.

We will write

$$Im(-\frac{1}{\varepsilon(k,\omega)}) = \frac{\pi}{2} \frac{\omega_p^2}{\omega} \sum_{n} F_n \delta(\omega - \Omega_n(k)), \qquad (7)$$

with

$$\Omega_{n}(k) = \begin{cases} \Omega_{on} & \text{for } k \leq \sqrt{2m\Omega_{on}/M} \\ M^{2}k^{2}/2m & \text{for } k \geq \sqrt{2m\Omega_{on}/M} \end{cases}$$
 (8)

The solid is thus represented as a set of oscillators with an excitation frequency spectrum given by  $\Omega_n(k)$ , with only one bound state  $\Omega_{on}$  for each atomic shell. For energy transfers larger than  $\Omega_{on}$  the atomic electron is treated as free. A discussion of the choice of  $\Omega_{on}$  will be given later. The dipole oscillator strengths  $F_n$  will be approximated by  $F_n = q_n/Z$ , where  $q_n$  is the number of electrons pertaining to the n'th shell, and Z the atomic number. The expression for  $Im(-1/\epsilon)$  is normalized so that the sum rule (6) is fulfilled. The condition for setting  $\epsilon(k,w)=\epsilon(0,w)$  can now be formulated as  $N\Omega_{on} << mc^2$ ; in other words, the target electrons must not be relativistic.

With this model we get for the total energy loss

$$-\frac{dE}{dx} = \frac{e^2 w_p^2}{2v^2} \sum_{n} F_n \{ \int_{\Omega_{On}}^{\infty} dw [\delta(w - \Omega_{On})] \ln \frac{2mc^2 \beta^2 \gamma^2 w}{1/(w^2 + 1^2)} + \frac{1}{w} ] + \frac{1^2}{w_p^2 \gamma^2} - \beta^2 \}$$
 (9)

which can be integrated over w to give

$$-\frac{dE}{dx} = \frac{e^2 w_p^2}{2v^2} \left[ \sum_{n=1}^{\infty} \frac{2mc^2 \beta^2 \gamma^2 E_{max}}{E_{on}^2 + N^2 I^2} + \frac{1^2}{w_p^2 \gamma^2} - \beta^2 \right]$$
 (10)

where  $E_{\max} = \hbar w_{\max} \approx 2 m c^2 \beta^2 \gamma^2$  is the maximum energy transfer, and  $E_{\text{on}} = \hbar \Omega_{\text{on}}$ . It will suffice to use this approximate expression for  $E_{\max}$ , since the main interest is the most probable energy loss, uninfluenced by the very close collisions. The dielectric function is given by (damping negligible)

$$\varepsilon(\omega) = 1 - \omega_p^2 \int_{n}^{\infty} \frac{f_n}{\omega^2 - \omega_n^2}$$
 (11)

consistent with the model for  $Im(1/\epsilon)$ , where to a good

approximation  $^5$   $f_n = F_n$  and  $\Omega_{on}^{\ \ 2} = w_n^{\ \ 2} + w_p^{\ \ 2} f_n$  . The equation determining the density effect is then

$$w_{p}^{2} \sum_{n} \frac{f_{n}}{1^{2} + w_{n}^{2}} = \frac{1}{\beta^{2} \gamma^{2}}$$
 (12)

with asymptotic solutions

$$1^{2} = 0 for \beta \gamma << \omega_{n}/\omega_{p}$$

$$1^{2} = \omega_{p}^{2} \beta^{2} \gamma^{2} for \beta \gamma >> \omega_{n}/\omega_{p} ,$$
(13)

giving for the energy loss

$$-\frac{dE}{dx} = \frac{e^2 \omega_p^2}{2v^2} \left[ \ln \frac{2mc^2 \beta^2 \gamma^2 E_{max}}{I^2} - \beta^2 \right] \qquad \beta \gamma \ll \omega_n/\omega_p \qquad (14)$$

$$-\frac{dE}{dx} = \frac{e^2 w_p^2}{2v^2} \ln \frac{2mc^2 E_{max}}{\hbar^2 w_p^2}$$
  $\beta \gamma \gg w_n/w_p$ , (15)

corresponding to the Bethe formula without density effect (14) and with full saturation of the transverse excitations (15). The average energy loss is often given as eq.(14) minus the density-effect correction  $\delta$ , which is then the difference between eq.(10) and eq.(14). The density-effect correction has been evaluated by Sternheimer<sup>5,18</sup> for most substances. The mean ionization potential in the present model is given by

$$lnI = \sum_{n} F_{n} ln M \Omega_{no} . \qquad (16)$$

For a restricted energy loss or the most probable energy loss,  $E_{\text{max}}$  is independent of  $\gamma$  (sec. E),and formula (15) is independent of  $\gamma$  giving the Fermi-plateau for the saturated energy loss.

## B. Calculation of energy-loss distributions

The energy loss calculated above is the average of the energy losses from many different projectile-target atom collisions, ranging from soft excitations of outer shell electrons to hard collisions producing  $\delta$ -rays. The statistical nature of these collisions lead to fluctuations, straggling, in the energy lost by particles penetrating the target. We shall only consider targets of thickness x, so thin that the energy lost is much less than the projectile energy. The stopping power can thus be assumed constant during the passage. Let us introduce

$$\xi = \frac{2\pi e^4}{mc^2 \beta^2} xNZ \tag{17}$$

as a measure of a typical energy loss (for Si  $\xi=17.81$  keV/mm  $x/\beta^2$ ). The decisive parameter determining the shape of the energy-loss distribution is  $\kappa=\xi/E_{max}$ . For  $\kappa>>1$ , there is a sufficiently large number of large energy transfers, that the distribution is Gaussian. Assuming  $\xi>>E_K$ , where  $E_K$  is an atomic binding energy, Landau<sup>6</sup> solved the problem for  $\kappa<<1$  in 1944.

The unknown distribution function is the solution of the kinetic equation, as formulated by Landau,

$$\frac{\partial f(x,\Delta)}{\partial x} = \int_{0}^{\infty} w(E)[f(x,\Delta-E)-f(x,\Delta)]dE$$
 (18)

which defines  $f(x,\Delta)$ , once the collision probability (per unit length)  $w(E)=Nd\sigma/dE$  is given. Here  $f(x,\Delta)d\Delta$  is the probability for the projectile to have lost the energy  $\Delta$  after traversing a target of thickness x. The distribution function is normalized, so that  $\int f(x,\Delta)d\Delta=1$ . The above integral is finite due to a finite maximum energy transfer  $E_{max}$  and a non-zero minimum energy transfer. The above kinetic equation can be solved applying the Laplace transformation, given by

$$\varphi(x,p) = \int_{0}^{\infty} f(x,\Delta) e^{-p\Delta} d\Delta.$$
 (19)

The inverse Laplace transformation is

$$f(x,\Delta) = \frac{1}{2\pi i} \int_{-i\infty+\sigma}^{+i\infty+\sigma} \phi(x,p) e^{p\Delta} dp , \quad \sigma > 0.$$
 (20)

After Laplace transformation the kinetic equation takes the form

$$\frac{\partial \phi(\mathbf{x}, \mathbf{p})}{\partial \mathbf{x}} = -\phi(\mathbf{x}, \mathbf{p}) \int_{0}^{\infty} w(\mathbf{E}) (1 - e^{-\mathbf{p}\mathbf{E}}) d\mathbf{E} , \qquad (21)$$

which can be integrated

$$\varphi(x,p) = \exp[-x\int_{0}^{\infty} w(E)(1-e^{-pE})dE]. \qquad (22)$$

From this formula we see that a splitting of the cross section in a sum leads to a product of Laplace transformed distribution functions. The final distribution function will thus consist of a convolution of the distribution functions pertaining to the different parts of the cross section.

Landau solved the kinetic equation for the Coulomb cross section

$$w(E) = \frac{\xi}{x} \frac{1}{E^2}$$
 (23)

(stricktly speaking, eq.(23) is the Thomson formula for Rutherford scattering in a Coulomb field). However, the average energy loss diverges for this cross section, and a non-zero minimum energy transfer  $\varepsilon'$  is introduced, so that the average energy loss for the Landau distribution equals the Bethe value. The Landau result is the universal function

$$f_{L}(x,\Delta) = \frac{1}{F} \frac{1}{2\pi i} \int_{\alpha-i\infty}^{\alpha+i\infty} \exp[u \ln u + \lambda u] du$$
 (24)

with the parameter  $\lambda$  given as

$$\lambda = \frac{1}{\xi} [\Delta - \xi (\ln \xi / \varepsilon' + 1 - C)]$$
 (25)

where C=0.577 is Euler's constant. The minimum energy transfer is given by

$$lne' = lnI^2/2mc^2\beta^2\gamma^2 + \beta^2 , \qquad (26)$$

ignoring the density effect. This gives an unphysically low value for  $\epsilon'$  (e.g., for Si :  $\epsilon'\!\sim\!0.05$  eV for  $\beta\gamma\!=\!1)$ ; however, for  $E_K^{<<\xi<<}E_{max}^{}$  the Landau function is a good approximation to the actual distribution. The minimum energy transfer merely determines the position along the energy axis of the Landau function and has no effect on the shape of the distribution function.

Although  $\kappa<<1$  for the projectile-target combinations investigated experimentally in the present work, the second condition for the validity of the Landau approach,  $\xi>>E_K$  is not fulfilled in our case. For Si,  $E_K^-2$  keV and  $\xi=17.81$  keV/mm  $x/\beta^2$ , which means that  $x/\beta^2>>0.1$  mm.

appearance of the Landau result, different Since the authors 7-9 have tried to take the binding effects into account by expansion of the  $e^{-pE}$  term in eq.(22). The distribution function can then be written as the Landau function convoluted with functions, depending on the higher moments of the energy loss of the difference between the actual and the Coulomb cross section. However, these authors only retained the first nontrivial term, corresponding to the second moment of the energy which is only a slight improvement to approach 10, due to the poor convergence of the expansion. distribution function, which is the Landau function convoluted with a Gaussian, has been much used in the interpretation of experiments ( for Si, see ref.11), letting the width of the Gaussian, which actually is given by the second moment of the energy loss, be a free parameter.

Finally, before turning to the model used in comparisons with experimental data in this work, other approaches should be mentioned. Allison and  $\operatorname{Cobb}^3$  also started from eq. (2), but a dielectric function extracted from photo-absorption data was used. This approach is, however, only applicable for dilute matter. A Monte-Carlo technique was used in ref.12 and 13 taking into account binding effects. A convolution technique developed by Bichsel<sup>14</sup> has recently been used in comparison with uncalibrated energy-loss data for 5 GeV/c pions passing through a ~20  $\mu$ m thick Si detector<sup>15</sup>. Recently, Lindhard<sup>16</sup> presented an approximation procedure for finding the distribution function. This procedure also allows inclusion of binding effects.

## C. The cross section model

We shall now describe the model used in comparison with the obtained experimental results. Talman<sup>17</sup> used a similar approach to obtain an analytical expression for the distribution function, although without density effect. We start from eq. (9) by interpreting  $\hbar \omega$  as the energy transfer in a collision between the incident particle and the target atoms. We thus get the collision probability as

$$w(E) = \frac{1}{x} \sum_{n=0}^{\infty} \delta(E - E_{on}) \left[ \ln \frac{2mc^{2} \beta^{2} \gamma^{2} E_{on}}{E_{on}^{2} + M^{2} L^{2}} + \frac{L^{2}}{\gamma^{2} \omega_{p}^{2}} - \beta^{2} \right] + \frac{1}{x} \sum_{n=0}^{\infty} E_{n}^{H}(E - E_{on}) / E^{2}$$
(27)

with  $\xi_n = F_n \xi$  and 1 given by eq.(12). H() denotes the Heavy-side function. The  $\delta$ -function term describes resonance excitations whereas the truncated  $1/E^2$  term is due to Coulomb excitations. This cross section is compared to the Rutherford cross section and the cross section by Hall<sup>9</sup> obtained from photoabsorption data, in fig.1. The model cross section evidently avoids the unphysical minimum energy transfer used in the Landau theory, and also binding effects, clearly reflected in the cross section by Hall are to some extent taken into account.

By introducing the average numbers of resonance collisions  $m_{_{\hbox{\scriptsize C}}}$  and Coulomb-type collisions  $m_{_{\hbox{\scriptsize C}}}$  for each shell, eq.(27) gives

$$m_{rn} = \frac{\xi_{n}}{E_{on}} \left( \ln \frac{2mc^{2}\beta^{2}\gamma^{2}E_{on}}{E_{on}^{2} + h^{2}l^{2}} + \frac{l^{2}}{\gamma^{2}\omega_{p}^{2}} - \beta^{2} \right)$$
 (28)

$$m_{Cn} = \frac{\xi_n}{E_{On}}.$$
 (29)

For  $\beta \gamma >> \omega_n/\omega_p$ ,  $l^2 = \beta^2 \gamma^2 \omega_p^2$ , and

$$m_{rn} = \frac{\xi_n}{E_{on}} \ln \frac{2mc^2 E_{on}}{\hbar^2 w_p^2} , \qquad \beta \gamma >> w_n / w_p.$$
 (30)

In tables 1 and 2 are given  $m_{rn}$  and  $m_{Cn}$  for 0.1 mm Si and 0.4 mm Ge, respectively, for  $\beta\gamma\rangle\rangle\omega_n/\omega_p$ . It is to be noted, that  $m_r$  is around a factor of 10 larger than  $m_c$ . With the above definition of  $m_{rn}$  and  $m_{Cn}$  the collision probability is given by

$$w(E) = \frac{1}{x} [\sum_{n=1}^{\infty} \delta(E - E_{0n}) + m_{0n} E_{0n} H(E - E_{0n}) / E^{2}].$$
 (31)

Talman<sup>17</sup> showed by using Laplace transforms, that the distribution function corresponding to the above cross section can be given analytically, but the evaluation of his expression is difficult when x is small.

Now the cross section is split into the resonant and the Coulomb-part, and then again into one part for shells with few collisions and a part for shells with many collisions.

With the cross section from eq.(31) the Laplace-transformed distribution function is given by

$$\phi(x,p) = \exp[-m_r(1-e^{-pE_0})] \exp[-m_c E_0 \int_{E_0}^{\infty} \frac{1-e^{-pE}}{E^2} dE].$$
 (32)

The shell-index n has here been omitted. Expanding the exponential in the exponent, for the resonance excitations we get:

$$\phi_{\mathbf{r}}(\mathbf{x}, \Delta) = e^{-m_{\mathbf{r}}} \sum_{\mathbf{k} = 0}^{-m_{\mathbf{r}}} e^{-p\mathbf{k}E_{\mathbf{0}}} m_{\mathbf{r}}^{\mathbf{k}} / \mathbf{k}!$$
(33)

Performing the inverse Laplace transformation, the distribution function for the resonance collisions is given by

$$f_{\mathbf{r}}(\mathbf{x}, \Delta) = k = 0 \frac{e^{-m} r m^{k}}{k!} \delta(\Delta - kE_{0}), \qquad (34)$$

which is nothing else than the Poisson distribution function. When  $m_{_{\mbox{\scriptsize T}}}\!\!<\!\!<\!\!1$ ,  $f(x,\Delta)\!\approx\!\delta(\Delta)$ , so that the shells with  $m_{_{\mbox{\scriptsize T}}}\!\!<\!\!<\!\!1$  practically do not participate in the formation of the distribution function through their resonance collisions. For the Coulomb-type collisions we have

$$\phi_{C}(x,p) = \exp(-m_{C}E_{0}) \sum_{E=0}^{\infty} \frac{1-e^{pE}}{E^{2}} dE$$
(35)

and

$$f_{C}(x,\Delta) = \frac{1}{2\pi i} \int_{-i\infty+\sigma}^{+i\infty+\sigma} \exp(p\Delta + m_{C} E_{0}) \int_{E_{0}}^{\infty} (e^{pE} - 1) E^{-2} dE dE, \qquad (36)$$

which, introducing  $t=pE_0$  gives

$$f_{C}(x,\Delta) = \frac{1}{E_{0}} \frac{1}{2\pi i} \int_{-i\infty+\sigma}^{+i\infty+\sigma} e^{m_{C}\left[\frac{\Delta t}{E_{0}m_{C}} - 1 + E_{2}(t)\right]} dt$$
 (37)

where  $E_2(t)$  is the exponential integral. When  $m_C << 1$ :

$$f_{C}(x,\Delta) = e^{-m_{C}} \left[\delta(\Delta) + \frac{m_{C}E_{0}H(\Delta-E_{0})}{\Delta^{2}}\right].$$
 (38)

For a large number of Coulomb-type collisions,  $m_C >> 1$ , the distribution function for these collision, not surprisingly, is given by the Landau function (24) with  $\lambda = \Delta/\xi - (\ln(\xi/E_0) + 1 - C)$ . For arbitrary  $m_C$  the following approximation will be used

$$f_{C}(x,\Delta) = e^{-m_{C}} \delta(\Delta) + (1 - e^{-m_{C}}) \left[ \frac{E_{0}}{\Delta^{2}} \int_{0}^{E_{0}} f_{L}(x,\Delta') d\Delta' + f_{L}(x,\Delta) \right] H(\Delta - E_{0}).$$
(39)

It is seen that this expression is correct in the limits m  $^{<<1}$ 

and  $m_C^{>>1}$ , and that it is normalized. Also for intermediate values of  $m_C^{}$ , (39) is a good approximation to (37).

To summarize: The distribution function for the Coulomb-type collisions from the shells with  $m_{\text{C}} \ge 10$  is a Landau function with parameters given as

$$\xi = \frac{\Gamma}{n} \xi_{n}, \quad \lambda = \frac{\Delta}{\xi} - (\ln \frac{\xi}{I} + 1 - C), \quad \ln I = \frac{\Gamma}{n} F_{n} \ln E_{on}. \quad (40)$$

$$m_{c} \ge 10$$

For shells with  $m_r \ge 10$ , the Poisson distribution, eq.(34), is replaced by a Gaussian,

$$f_{r}(x,\Delta) = \frac{1}{\sqrt{2\pi}\sigma_{r}} e^{-\frac{(\Delta-\bar{\Delta}_{r})^{2}}{2\sigma_{r}^{2}}}$$
(41)

where  $\bar{\Delta}_r = m_r E_0$  and  $\sigma_r = \sqrt{m_r} E_0$ . Thus the distribution function for the resonance collisions from shells with  $m_r \ge 10$  is given by (41), with

$$\bar{\Delta}_{r} = \sum_{m_{rn} > 10}^{r} m_{rn}^{E} \text{on} \qquad \sigma_{r}^{2} = \sum_{m_{rn} > 10}^{r} m_{rn}^{E} \text{on}. \qquad (42)$$

For shells with  $m_r$  or  $m_c$ <10 the distribution function has been calculated from (34) or (39) directly. Finally the resonance and the Coulomb-type contributions are convoluted, to give the final distribution function.

## D. Model Calculations

We shall now, before showing calculated distributions, discuss qualitatively the results of the above model. The width of the Landau distribution is independent of the binding energies,  $E_{\rm on}$ , being given simply as 4.02E. In the same way, the Coulomb contribution to the width from shells with many Coulomb-type collisions is independent of the binding energies of the electrons and proportional to their number. When  $m_{\rm c}$  is small a width cannot be ascribed to the distribution function for the

Coulomb collisions. For the resonance collisions, the width of the distribution is proportional to the binding energy,  $\sigma_r = \sqrt{m_r} E_0$ , when  $m_r > 1$ . For  $m_r < 1$ , the resonance collisions lead to a redistribution in the energy-loss function. Since  $\sigma_r < \sqrt{x}$  and  $E_r < x$ , it is the resonance collisions from inner shells which, in spite of their small number, for thin targets lead to broadening of the distribution function, as compared to the Landau distribution.

The Landau function and the distribution function from the above model for 2 GeV/c pions from the above model traversing 40, 80, 160, 320 and 640  $\mu m$  Si and Ge are shown in fig.2. The choice of the used excitation energies will be discussed later. It is seen that the present model converges towards the Landau function for large thicknesses. The distribution broaden for decreasing thickness, due to the decreasing number of resonance collisions. When  $m_{rv}-1$ , shoulders appear on the high-energy side distribution, corresponding to 1, 2,... K-shell excitations. This happens between 40 and 80 µm in Si and between 160 and 320  $\mu m$  in Ge. At the same time, the most probable energy loss shifts to a lower value, since the K-shell electrons longer contribute to the most probable energy loss. For  $m_{rK} <<1$ , the K-shell electrons also do not contribute to the FWHM of the distribution. In the case of Ge,  $m_{\text{rL}}^{-1}$  for 20  $\mu m$  and the Poisson-character of the distribution function for the L-shell resonance collisions becomes visible. The shoulder on e.g. the 20 and 40 µm Si spectrum is not to be expected as marked in experimental spectra, since it is a result of the  $\delta$ -function representation of the atomic binding, c.f. fig.1.

The  $\beta\gamma$ -dependence of the distribution function is weak for  $\beta\gamma$ )1, although the density effect becomes effective at different  $\gamma$ -values for the different shells. The number of resonance collisions saturates at  $\beta\gamma \sim E_{on}/\hbar\omega_{p}$  (cf. eq. (30), which for Si gives  $\beta\gamma \sim 60$ , 5 and 1 for the K,L and M-shell, respectively. In fig.3. is shown the distribution function for 2 GeV/c electrons, pions and protons on 40  $\mu$ m Si. The increasing number of K-shell resonance excitations with  $\gamma$  is clearly visible.

Finally, in figs.4 and 5 are shown the most probable energy loss and the width of the distribution for 2 GeV/c pions as function of thickness in the case of Si and Ge. For large thicknesses the most probable energy loss is slightly above the Landau value. At ~100  $\mu m$  Si and x~300  $\mu m$  Ge the most probable energy loss decreases faster with decreasing thickness than the Landau value due to the "switching-off" of the K-shell excitations. For much smaller thicknesses the most probable energy loss is independent of the K-shell excitations. The width of the distributions increase with decreasing target thickness until a maximum is reached at  $x\sim50\mu m$  Si and  $x\sim150\mu m$  Ge. For much smaller thicknesses the K-shell electrons no longer contribute to the FWHM of the distribution, and the width increases again now due to the resonance excitations of L-shell electrons.

The excitation energies characterizing the solid are taken from measurements of plasma frequencies and ionization potentials, ref. 18-22. For the M-shell in Si and the N-shell in Ge,  $\Omega_{\rm on}$  is taken as the plasma frequency. The other excitation energies are taken as ionization potentials scaled to give the correct mean ionization potentials<sup>22</sup>, I=169eV in Si and I=340eV in Ge. In this way, the excitation energies given in tables 1 and 2 are obtained.

# E. Mean-restricted and most probable energy losses

In section A, the mean, or average, ionization energy loss of relativistic charged particles, passing through thin foils, was calculated. This average energy loss is what is measured in classical experiments, as the difference in the projectile energy before and after the passage of the foil, averaged over many particles. For high-energy particles, this approach is not feasible, due to the very small energy loss less than 100 keV as compared to projectile energies of several GeV. A different approach is used in this work, namely to measure the energy deposited in the target. This can be done when the target is a fully depleted semiconductor detector. What is now the difference between the measured deposited energy and the calculated average energy loss? Energy escapes the foil (see

also sec. III.B) mainly as kinetic energy of  $\delta$ -rays. If the maximum energy transfer  $E_{\max}$  in the Bethe-formula is replaced by a constant  $E_0 \subset E_{\max}$ , we get the formula for the restricted energy loss, restricted in the sense that energy transfers are restricted to  $E \subset E_0$ ,

$$\Delta_{\text{restr.}} = \xi \{ \ln \frac{2mc^2 \beta^2 \gamma^2 E_0}{I^2} - \frac{E_0}{2mc^2 \gamma^2} - \beta^2 - \delta \}. \tag{44}$$

The energy loss to be compared to measured deposited average energy losses, should then be the above restricted energy loss,  $E_0$  being given as the kinetic energy of an electron of range of the order of the target thickness<sup>23</sup>. For 1 mm Si, we get  $E_0$  500 keV. The exact choice of  $E_0$  is not very important, due to the weak dependence of the above formula on  $E_0$ . Also this restricted energy loss is not easily comparable to measurements, due to the high-energy tail in the energy-loss distribution. An experimentally well defined quantity is the most probable energy loss. To calculate the most probable energy loss, in principle it is necessary to know the energy-loss distribution function. For the Landau function, the maximum occurs at  $^{24}$ 

$$\lambda = -0.225, \quad \lambda = [\Delta - \xi(\ln \frac{2mc^2 \beta^2 \gamma^2 \xi}{I^2} + 1 - C - \beta^2 - \delta)]/\xi$$
 (45)

giving for the most probable energy loss

$$\Delta_{mp} = \xi \left[ \ln \frac{2\pi c^2 \beta^2 \gamma^2 \xi}{I^2} + 0.198 - \beta^2 - \delta \right]. \tag{46}$$

In fig.6 is shown the most probable energy loss, eq. (46), with (lower full-drawn curve) and without (upper full-drawn curve) density effect. Also shown is the restricted energy loss, eq. (44), dotted and the average energy loss, eq. (10), dashed, both including density effect. The curves have been calculated for 0.1 mm Si and 0.4 mm Ge.

Escape of  $\delta$ -rays will also lead to changes in the energy-loss distribution, mainly at  $\Delta >> E_0$ . However, the probability of producing a  $\delta$ -ray with sufficient energy to escape the detector is at the per cent level, decreasing for decreasing target

thickness and the  $\delta$ -rays is not expected to give any appreciable broadening  $^{9}$  .

## III. EXPERIMENTAL CONSIDERATIONS

### A. General Layout

The experiment was performed at the beam-line t7 at the CERN Proton Synchrotron. Secondary particles, mostly  $e^+/e^-$ ,  $\pi^+/\pi^-$ ,  $K^+/K^-$  and  $p/\bar{p}$ , produced in the production target can be transported by the beam-line elements at momenta between 0.5 and 10 GeV/c. The divergence of the beam was typically 2 mrad and the beam size 10-20 mm, largest at the small momenta. The intensity could be varied between 10<sup>3</sup> and 10<sup>6</sup> particles per burst (450 ms). The momentum bite used was typically a few permille.

The last part of the beam line and the experimental area is shown in fig.7. The useful part of the beam was defined by the scintillators, SC. The anticoincidence counter, SC, vetoed particles hitting the target at distances larger than 6 mm from the center. The position of the particles was registered by the drift chambers, DC1-DC2-DC3, to an accuracy of ~0.1 mm. The particle-type was identified with the Cerenkov counters, C-1 and C-2, and the lead glass array, LG. A vacuum system (pressure <10<sup>-5</sup> torr) surrounded the beam from DC-1 throughout DC-2. The beam was cleaned by the 10 mrad dipole magnet, so that radiation, mainly photons, created upstream, did not hit the target.

Due to the very small content of kaons (less than 1%), it was decided only to use three kinds of particles, namely protons, pions, and electrons. This decision was also made in view of the limited space in the beam line. Two Cerenkov counters were used, one tuned for electron/muon separation and one for pion/kaon separation. In this way, the ~1% muons from pion decay were included with the 30-50% pions and the ~1% kaons with the 10-50% protons. In this way, the errors introduced by the muon and the kaon content of the beam, was less that other,

mainly statistical, uncertainties, due to the relatively slow variation of the energy loss with  $\gamma$ . At 2 GeV/c, the protons were identified by time-of-flight. The electrons were also identified with a lead glass array.

The data acquisition was done in the following way. The trigger logics selected the interesting events to be transferred to tape. The interesting events are events in the useful part of the beam, defined by the scintillation counters, giving a signal in the semiconductor target and which is well separated from the previous and the next particle in the burst. It was further required that the data-taking system (computer and CAMAC system) was idle.

particle identification was done in the hardware, apart from the electron identification by the lead glass. particle identification data consisted of the particle identification bit-pattern plus the lead glass ADC the events consisted of TDC-data from the drift Furthermore, chambers and ADC-data from the energy-loss detector. The arrival of the energy-loss signal relative to the beam particle was also recorded in a TDC. Various other signals were also recorded, either for each event or each burst, to check the correct performance of the experiment. A mini-computer, used to transfer events to tape, was also used for monitoring the experiment. Beam profiles, energy-loss spectra, lead-glass spectra, could be displayed on this mini-computer.

The drift chambers were mainly used to exclude particles hitting the edge of the active area of the energy-loss detectors. These particles give a reduced energy-loss signal since they penetrate partially depleted regions of the detector, and they appear in the energy-loss spectra mainly as a low-energy tail. However, a fraction of this tail remains, after reducing the beam size with the drift chambers, probably due to inefficiencies in the drift-chambers (see also section IV). The low-energy tail is removed in the comparison with calculations to improve the normalization.

# B. Energy Loss Detection

The Si detectors used in the experiment were commercial EG&G ORTEC totally depleted surface barrier detectors. Their dimensions are given in table 3. These detectors have a maximum thickness variation of  $\pm 0.5~\mu m$  and  $\pm 1.0~\mu m$  for the three thin and the three thick detectors, respectively. This thickness uniformity assures that no additional broadening of the energy-loss distribution is caused by thickness variations. We also present results from measurements using a 0.370 mm Ge detector. This detector was fabricated as described in ref. 23.

As we were interested in the width of the energy-loss distribution, it was necessary to operate the detector and the amplifier system in such a way, that the noise was much smaller than the width of the energy-loss distribution. It was thus necessary to cool the 3 thin detectors, to eliminate the noise contribution from leak current. Furthermore the 2 thin detectors had a very small active area, to reduce the noise caused by detector-capacitance. In this way resolutions (RMS value of Gaussian) as given in table 3 were achieved. For the Ge detector a resolution of  $\sigma=3.5$  keV was obtained. Finally it should be mentioned that pile-up did not lead to any observable deteoriation of the energy-loss spectra.

The detectors were calibrated using a Ba-133 source emitting X- and  $\gamma$ -rays, and a precision pulser. The detectors were calibrated before and after each run, and no detectable drift in the calibration constants, nor in the resolution, was found.

Calibrating detectors, used to measure energy loss of GeV particles, with  $\gamma$ -rays, assumes that the energy required to produce an electron/hole pair, w, is the same for the two processes. This is a reasonable assumption as differences from w for fast electrons, protons and photons have only been found for low-energy  $\alpha$ -particles and heavy nuclei<sup>25</sup>. Furthermore the production of electron/hole pairs leads to additional broadening. An intrinsic resolution, with variance  $\sigma^2 = F\Delta Ew$ . exists due to the electron/hole pair statistics 26. Here the energy lost by the projectile and F-0.10, the Fano-factor, accounts for the fact, that the formation of the different

electron-hole pairs are strongly correlated. This intrinsic resolution is, even for our thinnest detector, much smaller than the electronical resolution, and can thus be neglected.

We shall also briefly discuss processes, different from the primary ionization energy-loss process, in which energy may enter or escape the target, thus making difficult between measured deposited energies and calculated ionization energy losses. A detailed evaluation of these processes has been made in ref. 27. There is a large difference between the average energy loss and the average deposited energy loss due to of δ-rays. However, most probable energy loss the uninfluenced by these high-energy  $\delta$ -rays (see sec.II E). may also escape the detector in the form of photoelectrons, and Cerenkov radiation, and energy from transition radiation and bremsstrahlung may be absorbed.

When K-shell vacancies are created, the emitted electron on the subsequently emitted x-ray or Auger-electron may escape the detector. Because of the very small fluorescence yield and because of the short range of low-energy electrons these escapes have very little influence on the spectra.

Cerenkov radiation emitted in regions of low absorption may also escape the detector. Cerenkov radiation is, however, mainly emitted at low frequencies, where the absorption is large, and the non-absorbed radiation is negligible. It should be mentioned here, that the energy loss due to Cerenkov radiation is included in the calculation presented in sec. II.

Transition radiation and bremsstrahlung, only emitted in substantial amounts in the target by electrons, may be absorbed in the target. Only the energetic part of the photons can influence the measurements, and for these photons the absorption length is much larger than the target thicknesses.

In conclusion, what is measured as the number of liberated carriers in the target are closely proportional to the ionization energy loss, for not too large energy losses.

## IV. DISCUSSION OF RESULTS

## A. Energy loss and straggling in Si

Energy-loss distributions have been obtained for 2 GeV/c p,  $\mbox{$m^{+}$}$  and  $\mbox{$e^{+}$}$  on 32.0, 50.9, 100.3, 290 and 1040  $\mbox{$\mu m$}$  Si and for 8 GeV/c p,  $\pi^{\uparrow}$  and  $e^{\uparrow}$  on 174, 290 and 1040  $\mu m$  Si. In the negative polarity, energy-loss distributions have been recorded for 2 and GeV/c for the 290 and the 1040  $\mu m$  Si detector. We only show the energy-loss distributions for 2 GeV/c positive particles 6 Si targets in figs. 8-13. Also shown is the Landau distribution function (dashed) and the distribution function obtained from the model described in sec. II.C (full-drawn). The Landau function is shown as a reference, to see the importance electronic binding effects. The theoretical distribution functions have been convoluted with the resolution function, Gaussian with a width given by the resolutions quoted in table 3. Although the width of the resolution function is smaller than the width of the distribution function, it leads to some broadening, especially for the 32.0 µm detector.

The general observation is that the measured distributions follow nicely the broadening of the model distribution function, as compared to the Landau function, for decreasing thickness. Also the downward shift of the most probable energy loss, again as compared to the Landau function, seems to be reproduced.

To study quantitatively the agreement between measured widths and most probable energy losses and model predictions, in figs. 14-19 we have plotted measured and calculated (including resolution) values for the most probable energy loss (in keV/mm) and for the width (FWHM/ $\xi$ ), as function of  $\beta\gamma$  for the 6 different thicknesses. The measured values have been extracted by fitting a polynomial of order 8 to the data. Only data points with a content of more than ~25% of the maximum content are used in the fit. Increasing the order of the polynomial does not change significantly the extracted values.

Although the results from the model were discussed in sec. II.C, we shall here briefly comment on the theoretical curves on figs. 14-19.

The most probable energy loss from the model is below the Landau value for the two thin detectors and above for the other, due to the separation of collisions with one or more K-shell excitations from collisions with none for the thin targets. Both the Landau and the model most probable energy loss are proportional to  $\beta^{-2}$  for  $\beta\gamma^{\checkmark}1$ , has a minimum for  $\beta\gamma^{\sim}4$  and saturate at the Fermi-plateau for  $\beta\gamma^{\checkmark}50$ .

The FWHM of the Landau distribution is 4.02 $\xi$ , and the amount, that the width of the Landau distribution convoluted with the resolution function is above 4.02 $\xi$ , reflects the broadening due to the finite resolution. The decrease for  $\beta\gamma^{\checkmark}2$  in FWHM/ $\xi$  for the Landau distribution including resolution is caused by the  $\beta^{-2}$  increase in the energy loss for decreasing  $\beta$ .

The width of the model distribution is larger than the Landau function, up to almost a factor of two for the 32.0  $\mu m$  detector. For the two thin detectors the FWHM/E does not saturate until  $\beta\gamma\sim100$ , due to the saturation of the K-shell excitations at this value of  $\beta\gamma$ . For the thicker detectors, this saturation takes place at smaller  $\beta\gamma$ -values due to the smaller contribution of the K-shell excitations to the width of the distribution for large thicknesses.

We shall now discuss figs. IV.8-19, one thickness at a time.  $32.0~\mu m$ : The shoulder on the high energy side of the model distribution is not reproduced in the experiment. This shoulder, involving exactly one K-shell excitation, is caused by the unphysical  $\delta$ -function representation of the resonance collisions in the collision cross section, cf. fig.1. It is thus not to be expected as distinct in the experimental spectra. The agreement between the measured and the calculated distribution function is clearly not very good on the low energy side, the experimental one being significantly above the calculated. This may, at least partly, be due to the low energy tail, remaining when the edge of the detector is excluded. The level of this tail at the point of the cut-off, is clearly visible. In conclusion, the measured distributions are clearly 10-15% to wide with a most probable

energy loss ~4% too high, as compared to the model calculations. The more pronounced shoulder at high  $\gamma$ -values is responsible for the better agreement between the widths for 2 GeV/c e<sup>+</sup>.

- 50.9 µm: The one-K-shell-excitation-shoulder is still visible in the model distribution function, although it is closer to the peak. Indications of a weak shoulder in the experimental spectra seem to exist, but the distinct shoulder in the model distribution is not seen, for good reasons as explained above. The width and the most probable energy loss are in reasonable good agreement with calculated values (within a couple of per cent), especially considering the distinct shoulder on the model distribution. However, the experimental spectrum is above the theoretical distribution function on the low energy side and below on the high energy side. This is, at least partly, due to the low energy tail on the experimental spectrum and the shoulder on the theoretical distribution function.
- 100.3  $\mu m$ : At this thickness the one-K-shell-excitation shoulder is not visible, since it is very close to the peak of the distribution. The agreement between the experimental spectrum and the model calculation is almost perfect, but a small discrepancy between the heights of the distributions exists for 2 GeV/c e<sup>+</sup>. The low energy tail is very small due to the more favourable ratio between the area and the circumference of the detector, as compared to the two previous cases. The two thin detectors have an active area of 10 mm² whereas the present and the three thicker detectors have an area of 50 mm². The experimental distributions are 5-7% narrower than the model calculation. The most probable energy loss for 2 GeV/c  $\pi^+$  and p agrees perfectly with the model calculations but for 2 GeV/c  $e^+$  the experimental value is 3% too low.
- $174 \ \mu m$ : Very good agreement between experimental spectra and model calculations exist at 2 GeV/c, but for 8 GeV/c pions and protons, the experimental spectra are ~10% narrower than the model result and the experimental most probable energy loss is 3-4% lower than the theoretical value.

290 µm: Here all 2 and 8 GeV/c experimental spectra in both polarities are shifted downwards by ~4%, but the experimental widths agree well with the widths of the model distribution function. This discrepancy is suspected to be due to a depletion layer ~4% thinner than the actual thickness, but it has not been possible to confirm or disprove this suspicion. Finally, notice the very good agreement between width and most probable energy loss for particles of positive and negative charge to better than one percent.

1040 µm: The agreement between experimental spectra and the model calculations is very good, and the small difference between the model distribution function and the Landau function, most clearly visible in the height of the distributions, is well-reproduced, in the sense that the experimental spectra agree much better with the model distribution function than with the Landau function. Again results for positive and negative particles agree perfectly.

Let us finally make a comment on other measurements known to the authors. A few scattered results exist on the energy-loss distribution for relativistic particles in solid, particularly silicon, targets. Except for the results in ref. 28, they are all for thicknesses larger than  $200\mu m^{11,23,29-32}$  and none of these measurements are absolute. Either no energy calibration (e.g. with a  $\gamma$ -source) has been performed, or the thickness of the active layer is unknown. These results are thus of limited value, and they are not easily combined to show systematic trends.

# B. Energy loss and straggling in Ge

The only data to be discussed for Ge is the energy loss of 8 GeV/c positrons, pions, and protons in a 370  $\mu m$  Ge detector. This is mainly due to the difficult operation and fabrication of Ge-detectors.

The experimental energy loss distributions for 8 GeV/c  $e^+$ ,  $\pi^+$ , and p are in fig.20 compared to the Landau distribution (dashed) and the distribution function calculated from the model described in sec. II.C. The experimental resolution is negligible. Very good agreement exists between experiment and the model, both for the most probable energy loss and the width of the distribution as for the distribution function itself. So the additional broadening of the distribution mainly due to the nonnegligible binding energy of the K-shell electrons in Ge is well reproduced in the experiment.

# C. Ultra-relativistic effects in energy loss

The Bethe-Bloch formula as described in sec. II needs modifications at ultra-relativistic velocities, i.e. for  $\gamma > 1$ , such as radiative corrections, kinematic corrections, projectilestructure corrections etc. These corrections, however, seem to apply only to the average energy loss, and not to have any influence on restricted and most probable energy losses 22,33. A reduction in the value of the Fermi-plateau, as suggested by Tsytovitch<sup>34</sup>, and claimed observed by Zhadanov et al.<sup>35,36</sup> seems not to have any relevance to the restricted or the most probable energy  $loss^{36,37}$ . Also the measurements by Burq et al.  $^{38}$  do not confirm the predictions of Tsytovitch. Ogle et al. 39 have observed a  $(7\pm2)$ % reduction in the most probable energy loss with respect to the Fermi-plateau for  $\gamma \ge 3 \times 10^4$  in a 101 µm Si detector. The authors suggest an explanation in terms of the finite detector thickness and a relativistic effect.

In the present experiment no decrease or increase from the value of the Fermi-plateau has been observed for high  $\gamma$ -values. However, this is not in disagreement with the experiment by Ogle et al., since our largest  $\gamma$ -value is  $1.6 \times 10^4$  for the 174  $\mu m$  detector and  $4 \times 10^3$  for the 32.0  $\mu m$  detector.

## V. CONCLUDING REMARKS

The  $\gamma$ -dependence of the energy-loss for relativistic particle impact on solids has been studied in detail. The behaviour of the most probable energy loss as function of  $\beta\gamma$  agree in general well with calculations. In particular, a Fermi-plateau constant to within ~1% has been observed over the  $\gamma$ -range covered ~1-10 $^4$ ). Also the observed decrease in the most probable energy loss as function of target thickness agrees well with model calculations.

This work represents the first systematic study of energyloss distributions in solids over a wide range of thicknesses and y-values. Broadening of the distribution function relative to the Landau function, is observed for decreasing thickness. This broadening is caused by the increasing influence of the resonance collisions on the straggling. The measured energy-loss spectra are generally in good agreement with calculated distribution functions, where the electronical binding effects have been included in the single collision cross section. At the very thinnest targets, discrepancies exist, partly because of experimental problems, partly due to the representation of the resonance collisions in the cross section. Calculations based on a more realistic energy-loss cross section and better measurements, where particles hitting the edge of the detector are entirely excluded, are needed to investigate the significance of the discrepancies. Finally, the confirmation of the results by Ogle et al. 39 awaits energy loss measurements on foils thinner than  $100\mu m$  for  $\gamma$ -values larger than  $10^4$ .

## ACKNOWLEDGEMENTS

The authors acknowledge valuable discussions with J.U. Andersen, E.Bonderup, J.Lindhard and E.Lægsgård. One of us, (A.B.) expresses his gratitude for the hospitality of the colleagues at the Institute of Physics.

The Danish participation in this work was made possible by funds from the Danish Committee for Accelerator Physics.

#### REFERENCES

- 1) U.Fano, Ann.Rev.Nucl.Sci.<u>13</u> (1963) 1
- 2) U.Fano, Phys.Rev.<u>103</u> (1956) 1202
- 3) W.W.M.Allison and J.H.Cobb, Ann.Rev.Nucl.Part.Sci.30 (1980) 253
- 4) J.Lindhard, Kgl.Danske Videnskab.Selskab, Mat.-Fys.Medd.28 no.8 (1954)
- 5) R.M.Sternheimer, Phys.Rev.<u>88</u> (1952) 851
- 6) L.D.Landau, J.Phys.USSR <u>8</u> (1944) 201
- 7) O.Blunck and S.Leisegang, Z.Phys. 128 (1950) 500
- 8) P.Shulek et al., Sov.J.Nucl.Phys.<u>4</u> (1967) 400
- 9) G.Hall, Nucl.Instrum.Methods <u>220</u> (1984) 356
- 10) V.A.Chéchin and V.C.Ermilova, Nucl.Instrum.Methods <u>136</u> (1976) 551
- 11) S.Hancock et al., Phys.Rev.A 28 (1983) 615; S.Hancock et al.
  Nucl.Instrum.Methods B 1 (1984) 16
- 12) K.H.Ispirian et al., Nucl.Instrum.Methods 117 (1974) 125
- 13) V.C.Ermilova et al., Nucl.Instrum.Methods 145 (1977) 555
- 14) H.Bichsel, Phys.Rev.B <u>1</u> (1970) 2854; do. Phys.Rev.A <u>9</u> (1974) 571; H.Bichsel and R.P.Saxon, Phys.Rev.A <u>11</u> (1975) 1286
- 15) H.Bichsel, Nucl.Instrum.Methods A 235 (1985) 174
- 16) J.Lindhard, Physica Scripta <u>32</u> (1985) 72
- 17) R. Talman, Nucl. Instrum. Methods <u>159</u> (1979) 189
- 18) R.M.Sternheimer, Phys.Rev.145 (1966) 247
- 19) H.R.Philips and H.Ehrenreich, Phys.Rev. 129 (1963) 1550
- 20) F.C.Brown, Solid State Physics 29 (1974) 1
- 21) Handbook of Chemistry and Physics, CRC Press, 1973
- 22) S.P.Ahlen, Rev.Mod.Phys.<u>52</u> (1980) 121
- 23) H.Esbensen et al., Phys.Rev.B <u>18</u> (1978) 1039
- 24) H.D.Maccabee and D.G.Papworth, Phys.Lett.A 30 (1969) 241
- 25) "Average Energy Required to Produce An Ion Pair", ICRU REPORT 31, Washington 1979, USA
- 26) U.Fano, Phys.Rev.<u>72</u> (1947) 26
- 27) S.P.Møller, Ph.D.Thesis, 1986, University of Aarhus (unpublished)
- 28) R.Bailey et al., Nucl.Instrum.Methods 213 (1983) 201

- 29) C.Julliot and M.Cantin, Nucl. Instrum. Methods 157 (1978) 235
- 30) D.W.Aitken et al., Phys.Rev.<u>179</u> (1969) 393
- 31) J.J.Kolata et al., Phys.Rev. 176 (1968) 484
- 32) H.D.Maccabee et al., Phys.Rev.<u>165</u> (1968) 469
- 33) A.Crispin and G.N.Fowler, Rev.Mod.Phys. 42 (1970) 290
- 34) U.N.Tsytovich, Sov.Phys.JETP <u>16</u> (1963) 1260
- 35) G.D.Zhadanov et al., Sov.Phys.JETP 16 (1963) 245
- 36) K.I.Alekseeva et al., Sov.Phys.JETP <u>17</u> (1963) 1254
- 37) E.G.Drukarev, Sov.J.Nucl.Phys.33 (1981) 215
- 38) J.P.Burq et al., Nucl.Instrum.Methods <u>187</u> (1981) 407
- 39) W.Ogle et al., Phys.Rev.Lett.40 (1978) 1242

Table 1

	T			
n	K	L	М	
m rn	1.04	57.7	330	
m <sub>Cn</sub>	0.063	4.22	29.9	
E <sub>on</sub> (eV)	4033	241	17	
F <sub>n</sub>	2/14	8/14	4/14	
ξ <sub>n</sub> (keV)	0.254	1.02	0.509	

Table 2

n	K	L	M	N
m rn	0.806	24.3	481	1011
m Cn	0.050	1.75	41.8	111.8
E <sub>on</sub> (eV)	17920	2056	194	16.1
F <sub>n</sub>	2/32	8/32	18/32	4/32
ξ <sub>n</sub> (keV)	0.900	3.60	8.10	1.80

Table 3

x(µm)	32.0	50.9	100.3	174.0	290	1040
A(mm²)	10	10	50	50	50	50
σ(keV)	0.784	0.730	2.00	3.51	3.18	3.95


## TABLE CAPTIONS

- Table 1. In the table is given the number of resonance collisions  $(m_{rn})$ , the number of Coulomb-type collisions  $(m_{cn})$ , the effective binding energy  $(E_{on})$ , the oscillator strenght  $(F_n)$  and the corresponding value for  $\xi = F_n \xi_n$  for the K, L and the M-shell in 0.1 mm Si.
- Table 2. As table 1, but for the K, L, M and N-shell in 0.4 mm  $\,$  Ge.
- Table 3. Thickness (x), active area (A) and resolution  $(\sigma)$  of the Si-detectors used.

## FIGURE CAPTIONS

- Fig. 1. Collision cross section as function of energy transfer for our model (full-drawn), the Rutherford cross section (dashed) and the cross section from ref.9 (dotted).
- Fig.2. Distribution functions for 2 GeV/c pions traversing 20, 40, 80, 160, 320 and 640  $\mu m$  Si (upper part) and Ge (lower part). The Landau function is shown for comparison. The distribution functions are shown as function of the Landau parameter  $\lambda$ .
- Fig.3. Distribution functions for 2 GeV/e e,  $\pi$  and p penetrating 40  $\mu m$  Si. The Landau function is shown for comparison. The distribution functions are shown as function of the Landau parameter  $\lambda$ .
- Fig. 4. Most probable energy loss ( $\Delta p/x$ ) and width (FWHM/E) of the energy-loss distribution for 2 GeV/c  $\pi$  as function of thickness Si. The dashed curve is the Landau result.
- Fig. 5. As Fig. 4, but for Ge.
- Fig.6. Most probable (full-drawn), restricted (dotted) and average (dashed) energy loss in Si and Ge as function of  $\beta\gamma$ . For details, see the text.
- Fig.7. Schematic drawing of the experimental setup. DC designates drift chamber, SC scintillator, C Cerenkov counter and LG lead-glass array.
- Fig. 8. Experimental energy-loss distributions compared to the Landau function (dashed) and the distribution function from our model (full-drawn). The upper spectrum is for 2 GeV/c positrons, the middle for 2 GeV/c pions and the lower for 2 GeV/c protons traversing the 32.0  $\mu$ m Si target.

- Fig. 9. As fig.8 but for the 50.9  $\mu m$  Si target.
- Fig. 10. As fig. 8 but for the 100.3  $\mu m$  Si target.
- Fig. 11. As fig. 8 but for the 174  $\mu m$  Si target.
- Fig. 12. As fig. 8 but for the 290  $\mu m$  Si target.
- Fig. 13. As fig. 8 but for the 1040  $\mu m$  Si target.
- Fig. 14. Most probable energy loss,  $\Delta_p$ , divided with thickness, x, and width, FWHM, divided with the Landau parameter,  $\xi$ , as function of  $\beta\gamma$  for the 32.0  $\mu m$  Si target.
- Fig. 15. As fig. 14, but for the 50.9  $\mu m$  Si target.
- Fig. 16. As fig. 14, but for the 100.3  $\mu m$  Si target.
- Fig. 17. As fig. 14, but for the 174  $\mu m$  Si target.
- Fig. 18. As fig. 14, but for the 290 µm Si target.
- Fig.19. As fig.14, but for the 1040  $\mu m$  Si target.
- Fig. 20. Experimental energy-loss distributions compared to the Landau function (dashed) and the distribution function from our model (full-drawn). Energy-loss distributions are shown for 8 GeV/c positrons (upper part), pions (middle part) and protons (lower part).

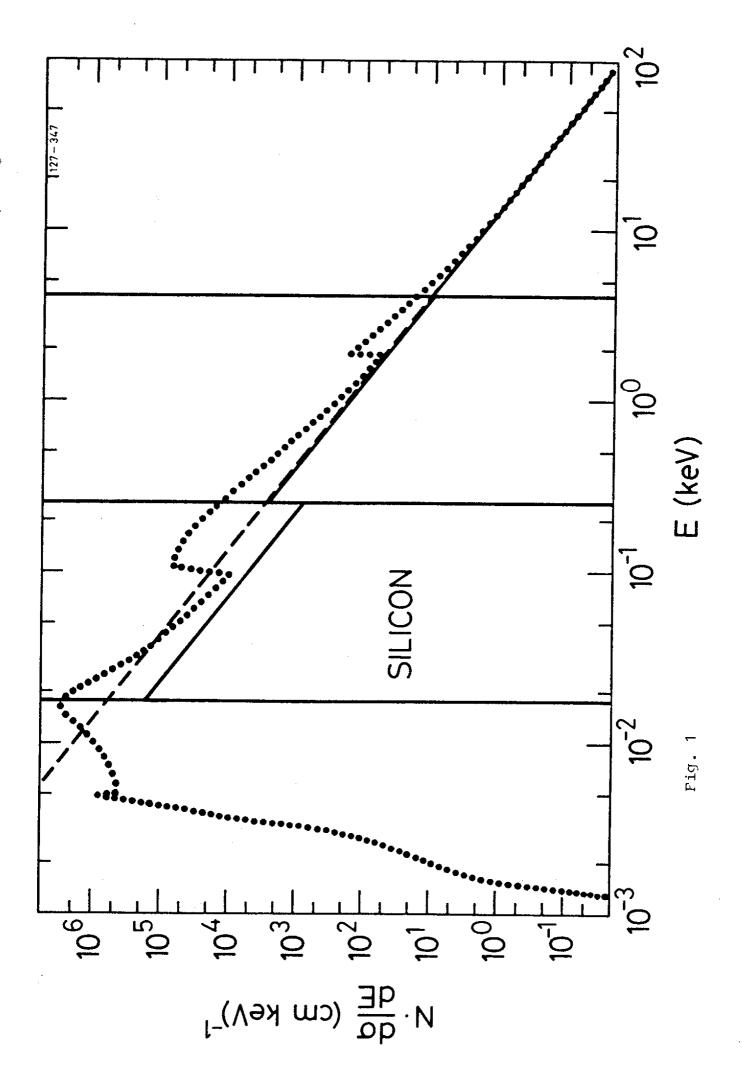

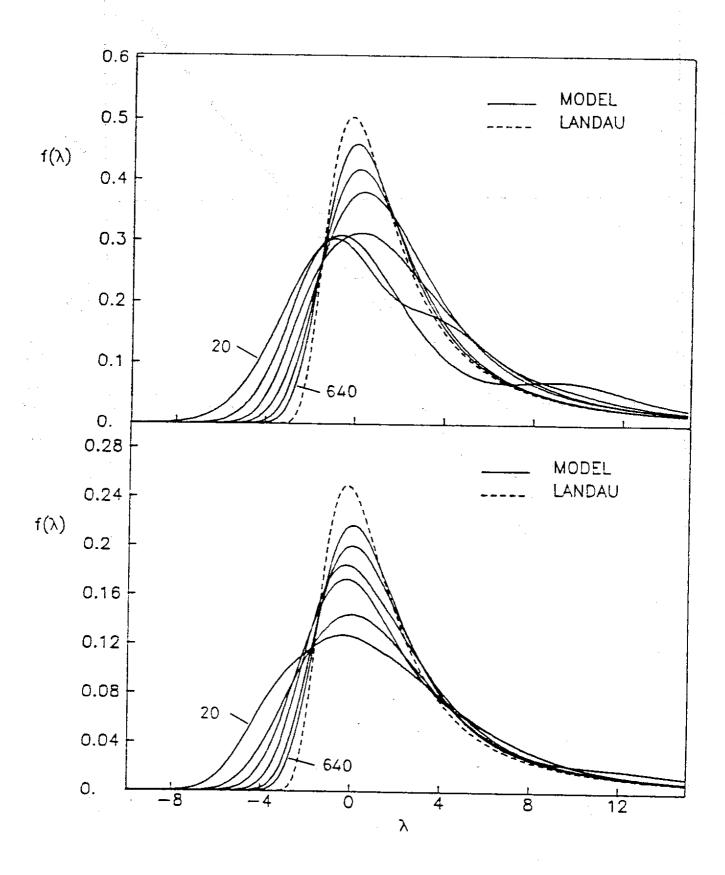
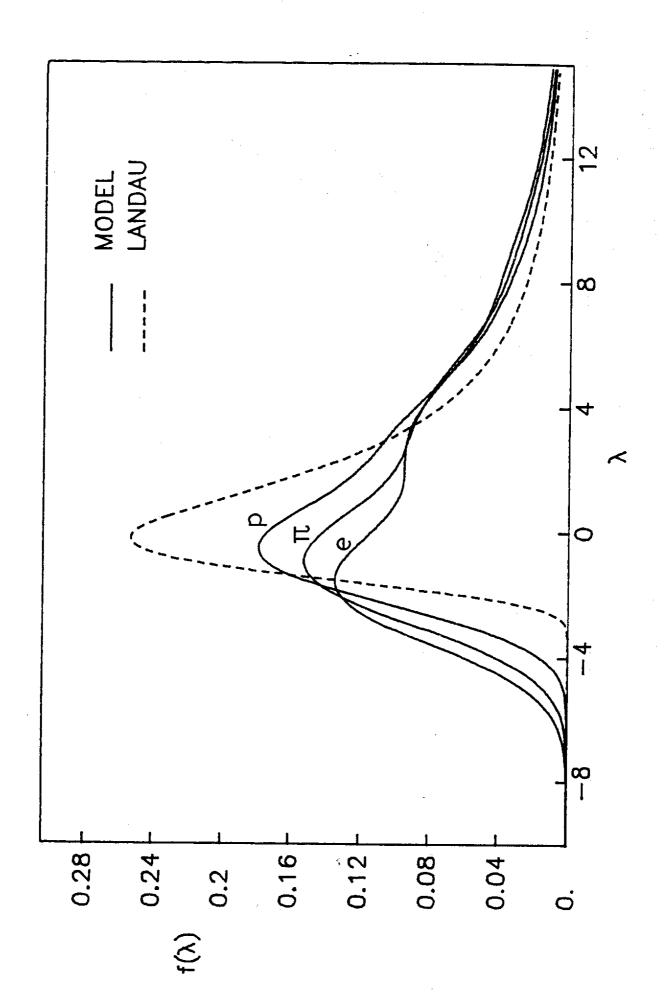


Fig. 2



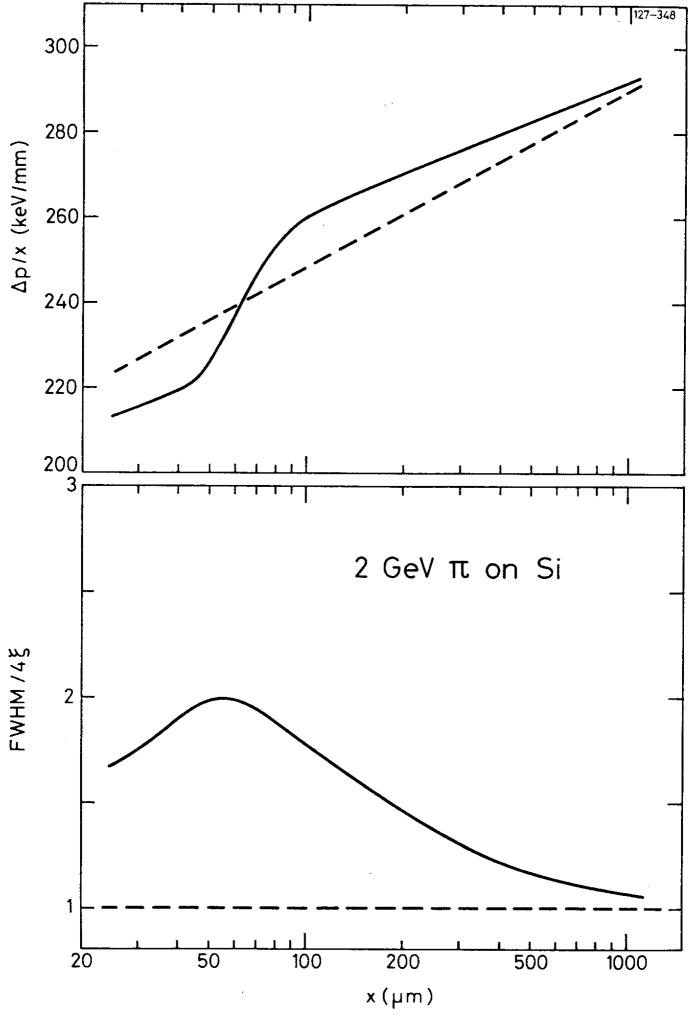
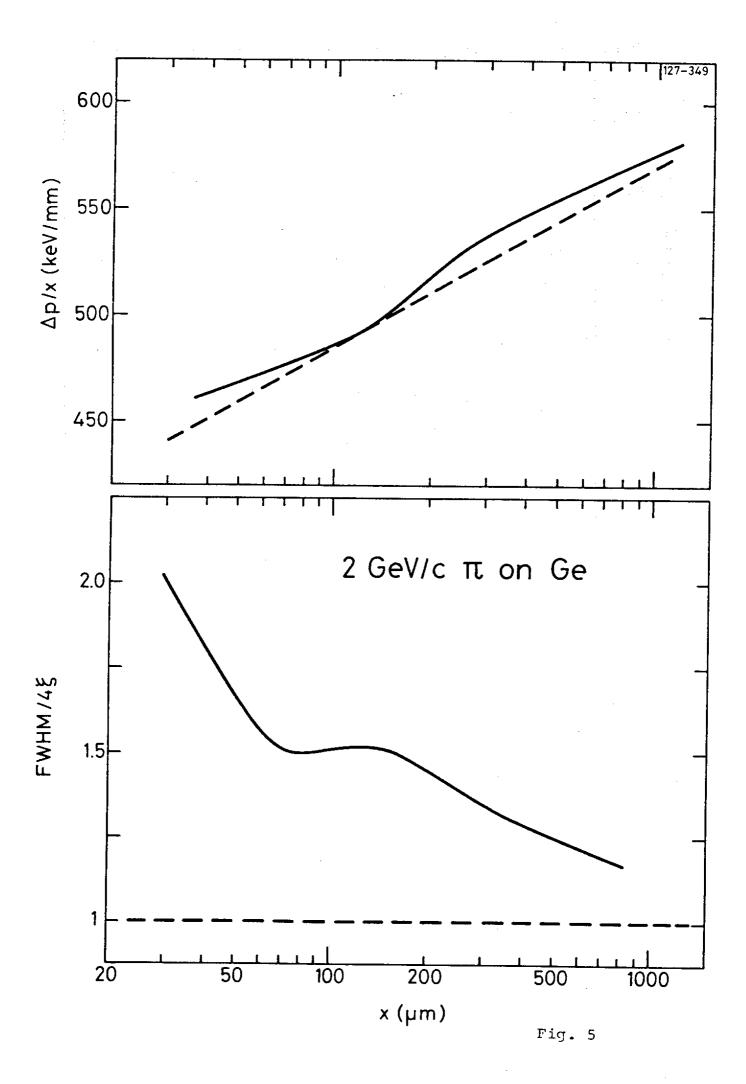
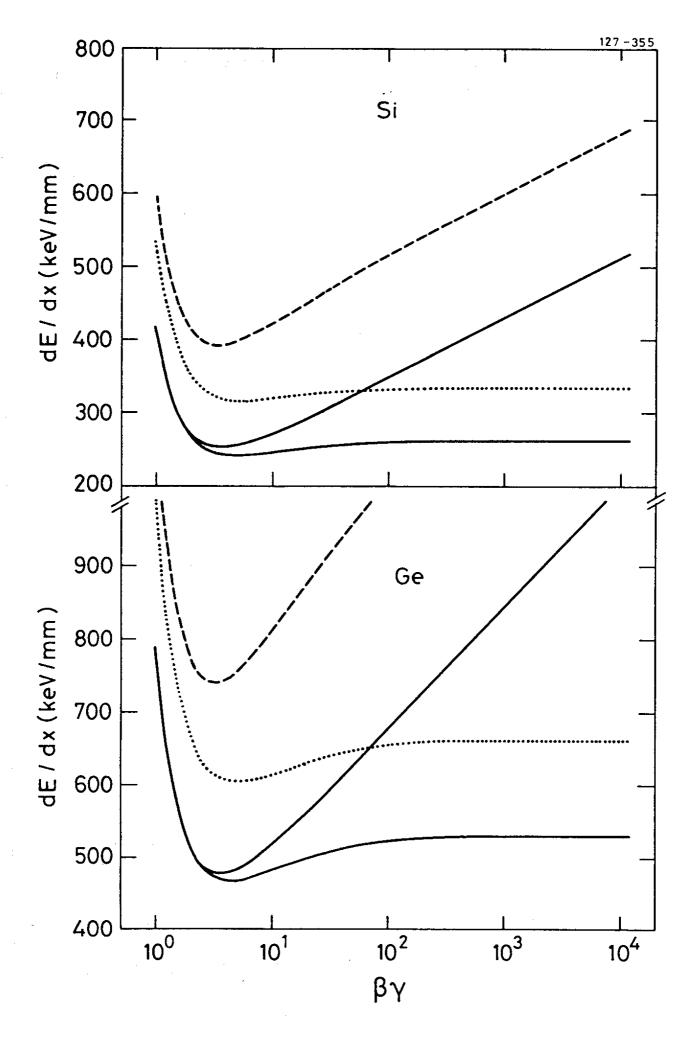
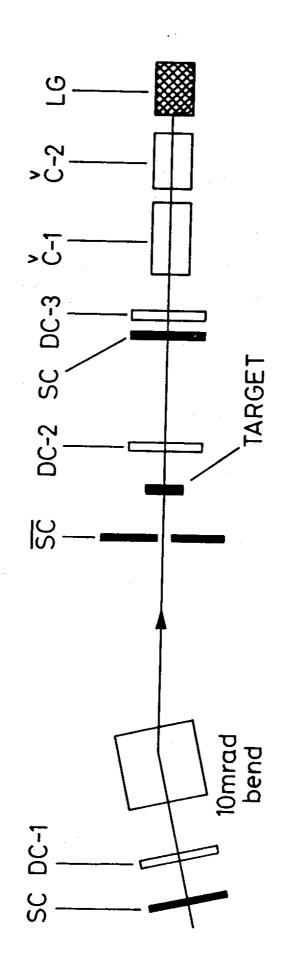


Fig. 4







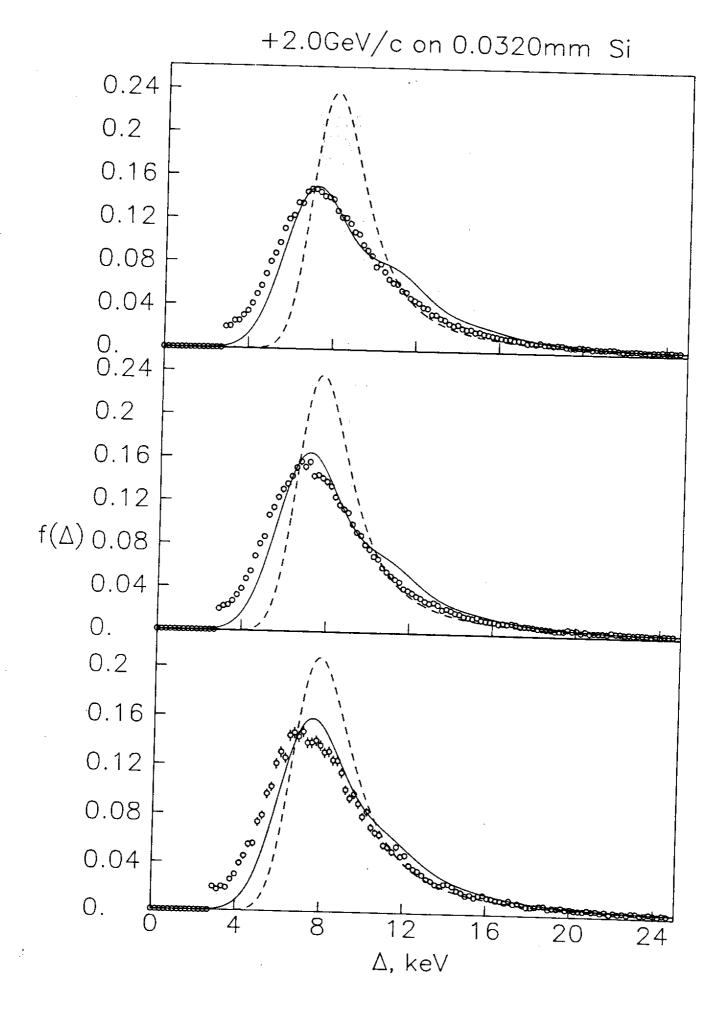

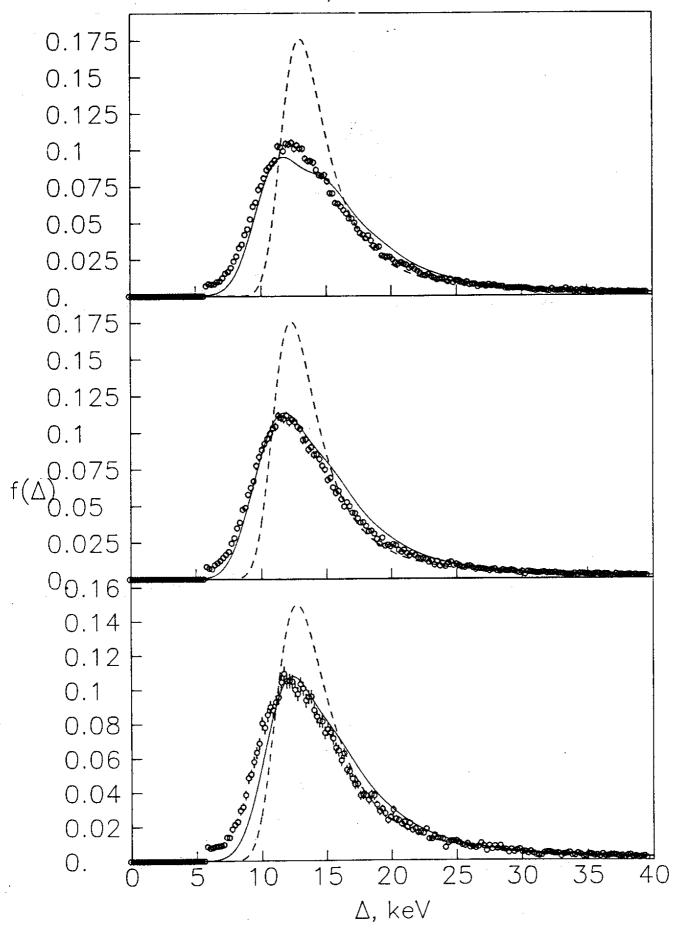
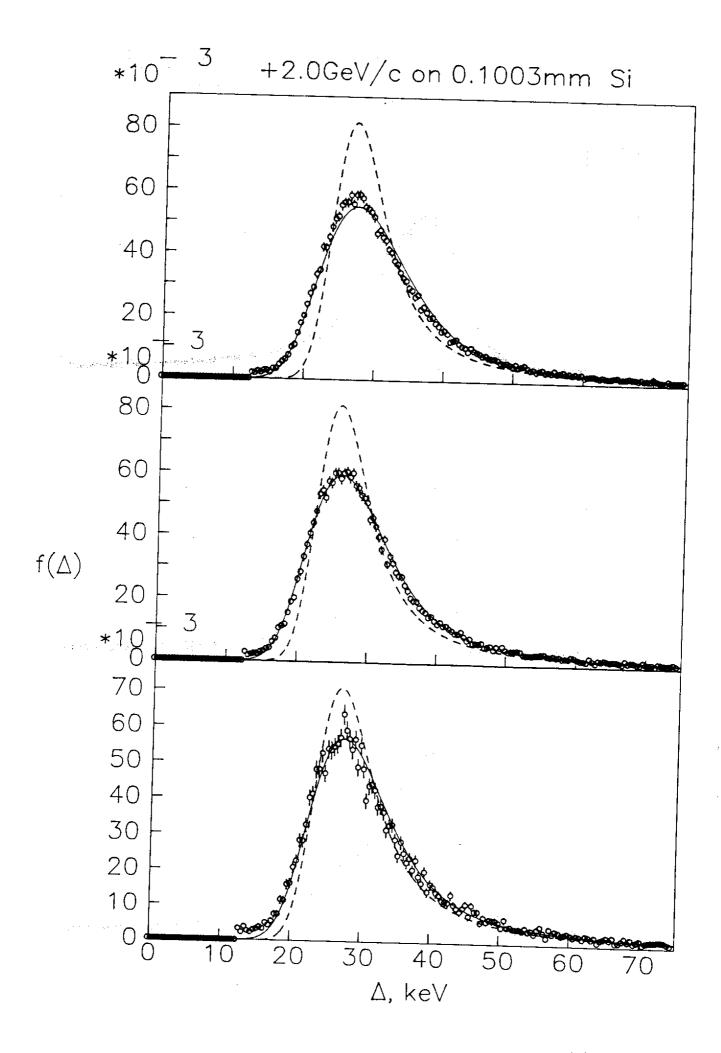


Fig. 8










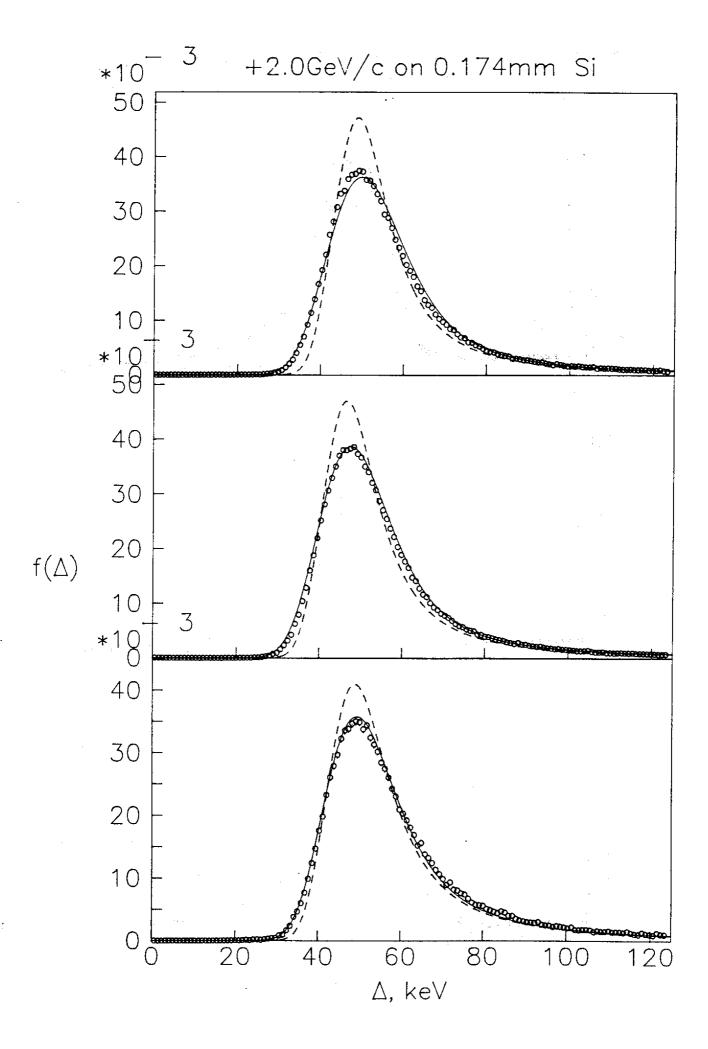


Fig. 11

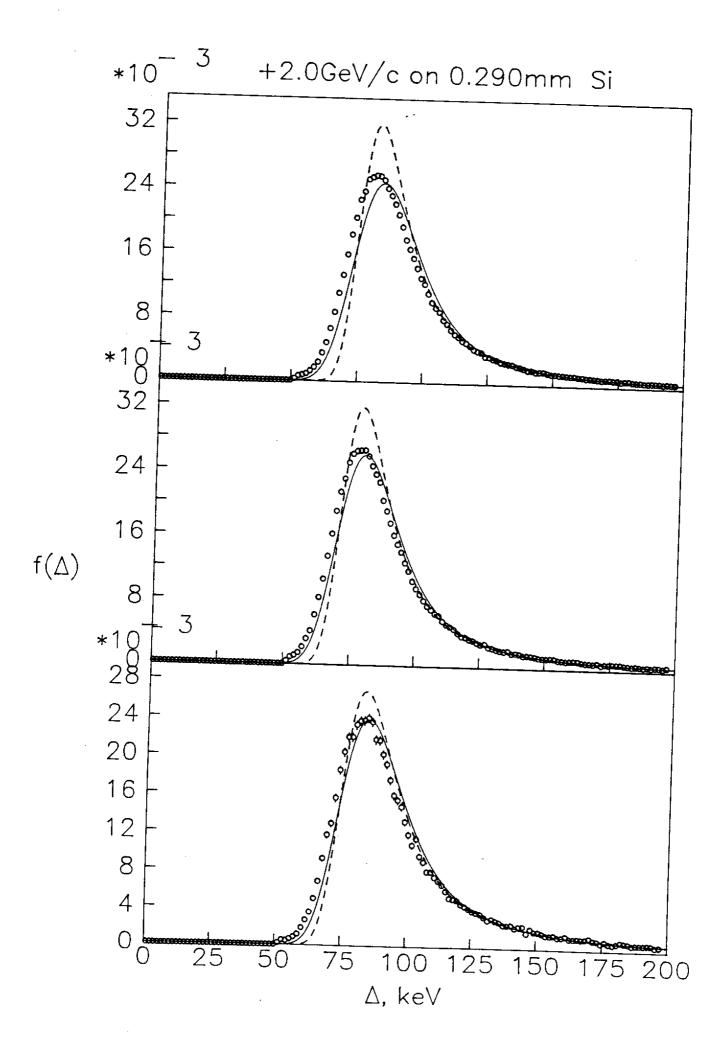


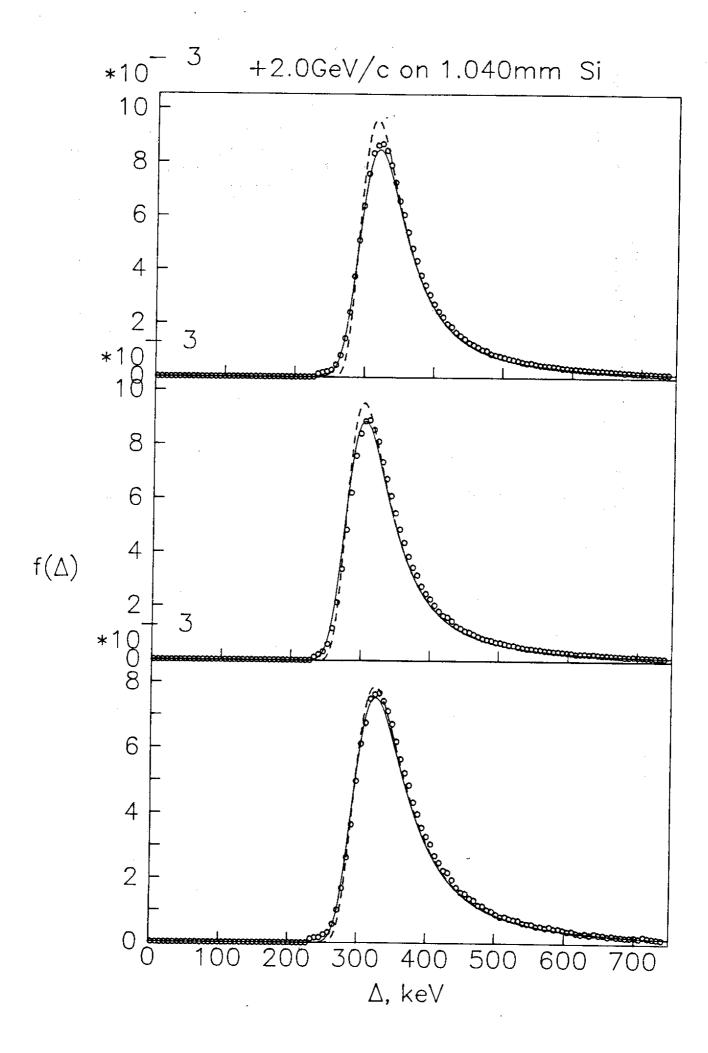


## .032 mm Si

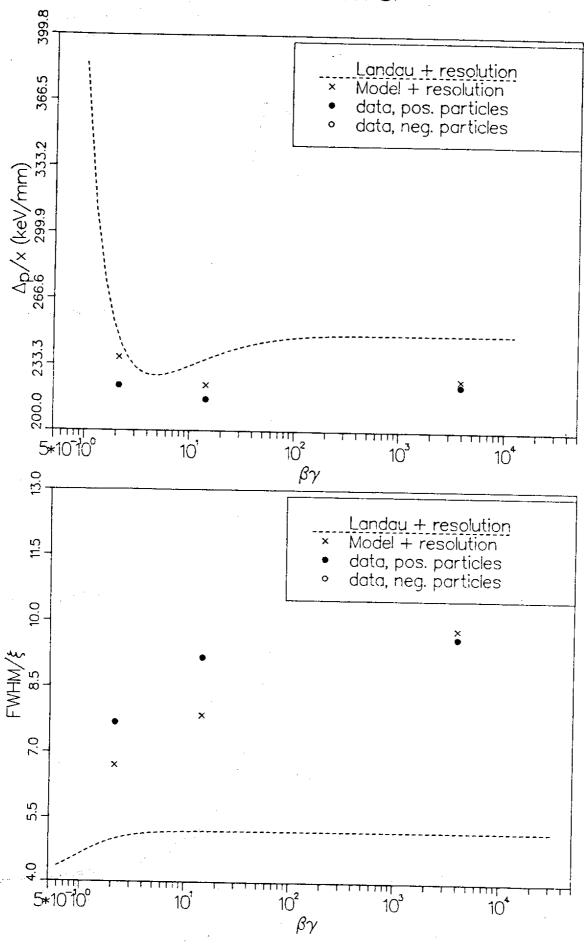


#### .051 mm Si

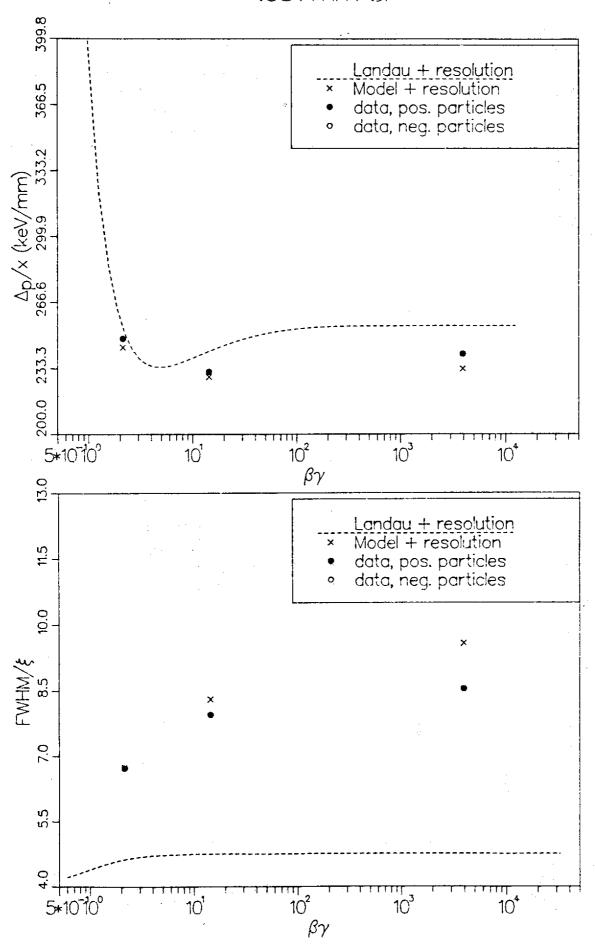




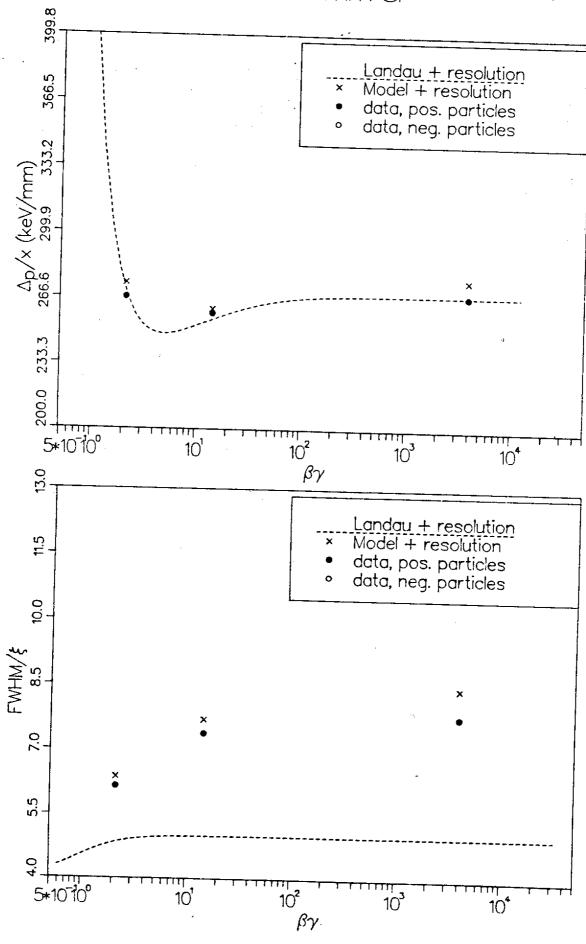

## .174 mm Si

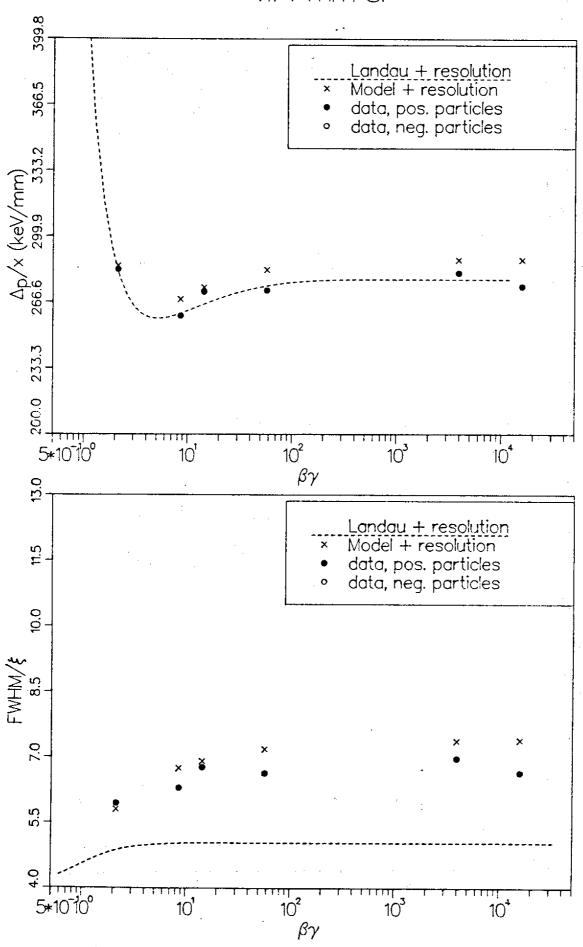

# .290 mm Si

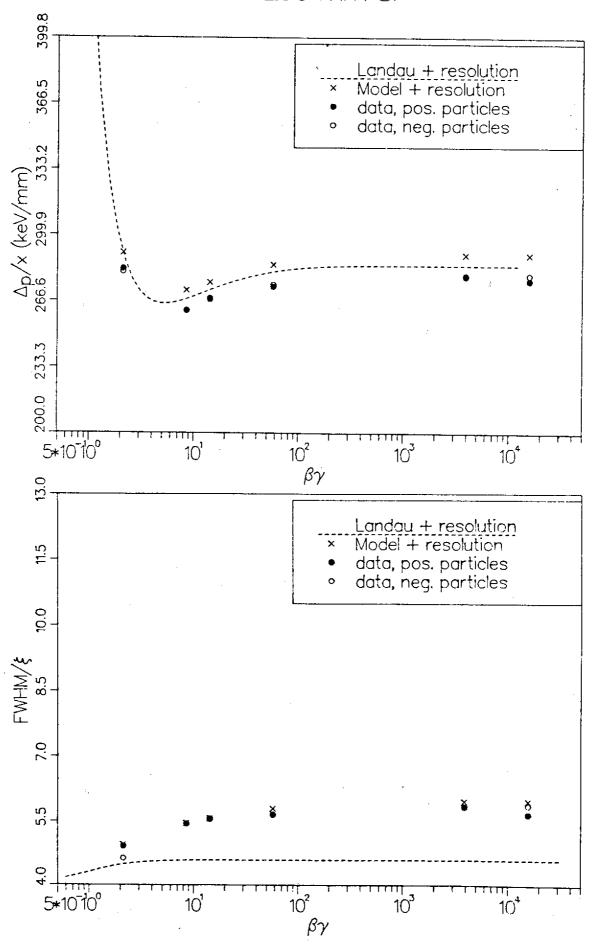

#### 1.040 mm Si

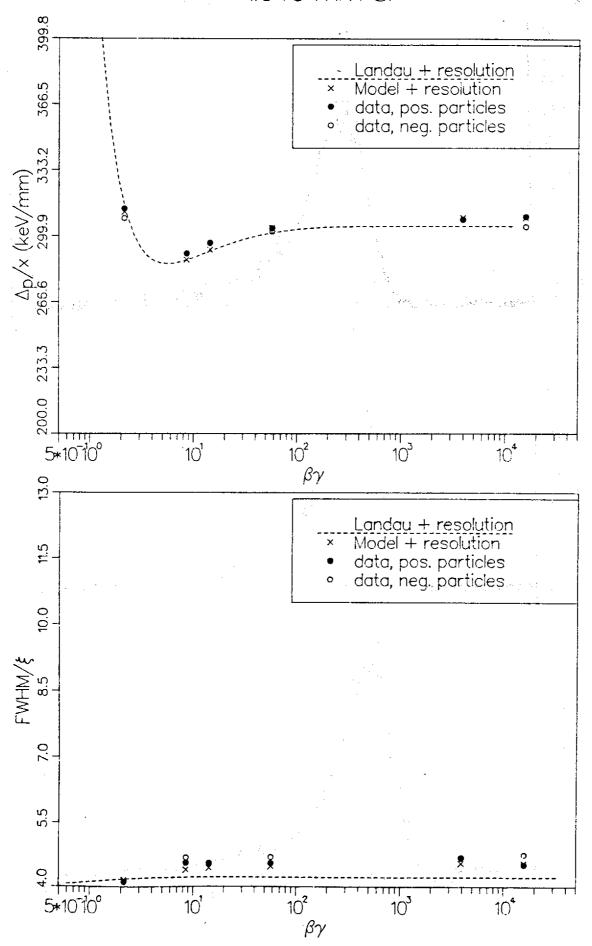


Fig. 19

