

TORCH: a large area time-of-flight detector for particle identification

N. Harnew^{a,*}, S. Bhasin^{b,c}, T. Blake^f, N.H. Brook^b, T. Conneely^g,
 D. Cussans^c, M. van Dijk^d, R. Forty^d, C. Frei^d, E.P.M. Gabriel^e, R. Gao^a,
 T.J. Gershon^f, T. Gys^d, T. Hadavizadeh^a, T.H. Hancock^a, M. Kreps^f,
 J. Milnes^g, D. Piedigrossi^d, J. Rademacker^c

^a*Denys Wilkinson Laboratory, University of Oxford, Keble Road, Oxford OX1 3RH, United Kingdom*

^b*University of Bath, Claverton Down, Bath BA2 7AY, United Kingdom.*

^c*H.H. Wills Physics Laboratory, University of Bristol, Tyndall Avenue, Bristol BS8 1TL, United Kingdom*

^d*European Organisation for Nuclear Research (CERN), CH-1211 Geneva 23, Switzerland*

^e*School of Physics and Astronomy, University of Edinburgh, James Clerk Maxwell Building, Edinburgh EH9 3FD, United Kingdom*

^f*Department of Physics, University of Warwick, Coventry, CV4 7AL, United Kingdom*

^g*Photek Ltd., 26 Castleham Road, St Leonards on Sea, East Sussex, TN38 9NS, United Kingdom*

Abstract

TORCH is a time-of-flight detector that is being developed for the Upgrade II of the LHCb experiment, with the aim of providing charged particle identification over the momentum range 2–10 GeV/ c . A small-scale TORCH demonstrator with customised readout electronics has been operated successfully in beam tests at the CERN PS. Preliminary results indicate that a single-photon resolution better than 100 ps can be achieved.

Keywords: Time-of-flight, Particle identification, Cherenkov radiation, Micro-channel plate photomultipliers, LHCb upgrade

PACS: 29.40.Cs, 29.40.Gx

1. Introduction

TORCH is a time-of-flight detector designed to provide Particle IDentification (PID) for low momentum particles between 2-10 GeV/ c [1, 2]. The detector exploits prompt Cherenkov light produced when charged particles traverse a 10 mm thick quartz plate. The photons propagate via total internal reflection to the edge of the plate where they are focussed onto a detector plane comprising micro-channel plate photomultipliers (MCP-PMTs), shown in Fig. 1(a).

*Corresponding author

Email address: Neville.Harnew@physics.ox.ac.uk (N. Harnew)

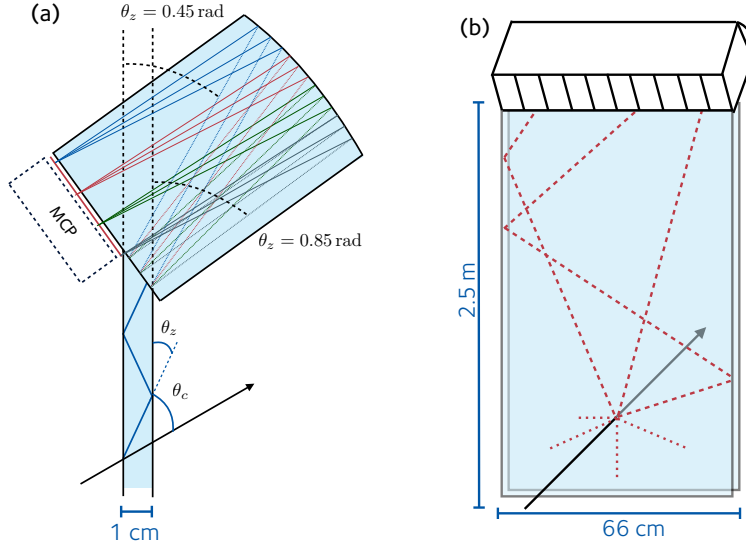


Figure 1: Schematics of a TORCH module showing possible reflection paths: (a) the focussing block and MCP plane, (b) a single LHCb module.

The aim is to measure individual photons with an angular precision of 1 mrad and 70 ps time resolution and, with ~ 30 detected photons, this would result in ~ 13 ps per incident charged particle.

TORCH is proposed for the upgrade II of the LHCb experiment, where PID of pions, kaons and protons is essential for CP violation measurements, exotic spectroscopy and particle tagging [3]. To provide the necessary PID discrimination up to 10 GeV/c over the full spectrometer acceptance, TORCH forms a time of flight wall of area $5 \times 6 \text{ m}^2$, located 10 m from the proton-proton interaction region. The detector is divided into 18 modules, each 66 cm wide and 2.5 m high, illustrated in Fig. 1(b). To meet the challenging LHC environment, TORCH is designed for high occupancy and significant pile-up.

When a charged particle passes through a TORCH module, the track entry point in the quartz radiator is measured from position information provided by the tracking system of the LHCb spectrometer. The characteristic photon patterns are reconstructed from the MCP-PMT photon detectors and corrections made to account for chromatic dispersion. To then distinguish the different particle species, the expected distributions for $\pi/K/p$ hypotheses are compared to the measured MCP-PMT photon spatial hits and arrival times.

2. Micro-channel plate PMTs

To achieve the required angular resolution of TORCH, each MCP-PMT detector requires 128×8 effective granularity in the transverse and longitudinal projections over a $53 \times 53 \text{ mm}^2$ active area, with 11 MCP-PMTs per module.

The MCP-PMTs [4] are developed with industrial partners, Photek UK. The pixels are 64×64 and grouped to read out with 64×8 granularity; charge sharing is then used to give required 128 granularity in the transverse direction. To survive the LHC environment, each MCP-PMT must also be capable of withstanding a large integrated charge on its anode (5 C cm^{-2}), achieved using an atomic-layer deposition (ALD) coating [5, 6]. The MCP-PMTs are read out with a customised electronics system [7], and utilize the NINO32 [8] and HPTDC [9] chipsets, developed for fast timing applications of the ALICE experiment.

3. Beam tests

A small-scale TORCH demonstrator module was tested in CERN PS 5 GeV/ c mixed pion-proton beam in November 2017. The quartz radiator has dimensions $120 \times 350 \times 10 \text{ mm}^3$ and read out with a single Photek MCP-PMT of 64×4 granularity. The radiator plate was mounted in an almost vertical position, tilted backwards by 5° with respect to the horizontal incidence of the beam. Pions and protons were distinguished by an external time-of-flight telescope. A method of data-driven calibration was employed to correct simultaneously for time-walk and integral non-linearities of the electronics [2].

Data analysis from the test-beam run is well advanced. Characteristic photon bands are observed due to reflections from the faces of the radiator plate. With the beam impinging approximately 14 cm below the plate centre and close to its side, the patterns show the expected distribution of reflections, shown in Fig. 2 (a). The residuals between the observed and simulated times of arrival are shown in Fig. 2 (b), resulting in a resolution per photon of ~ 100 ps. The tail in the distribution is caused by imperfect corrections, and improvements are expected when charge-to-width calibrations are incorporated.

4. Summary and future plans

A single-photon timing resolution of approximately 100 ps has been achieved with a small-scale TORCH demonstrator utilising a customised 64×4 pixelated MCP-PMT, and the timing performance is approaching that required for the Upgrade II of the LHCb experiment. This prototype is a precursor to a half-length TORCH module ($660 \times 1250 \times 10 \text{ mm}^3$) which is currently under construction. The half-length module will be equipped with ten 64×8 pixel MCP-PMTs and will be ready for test-beam operation at the end of 2018.

Acknowledgments

The support is acknowledged of the STFC Research Council, UK, and of the European Research Council through an FP7 Advanced Grant (ERC-2011-AdG 299175-TORCH).

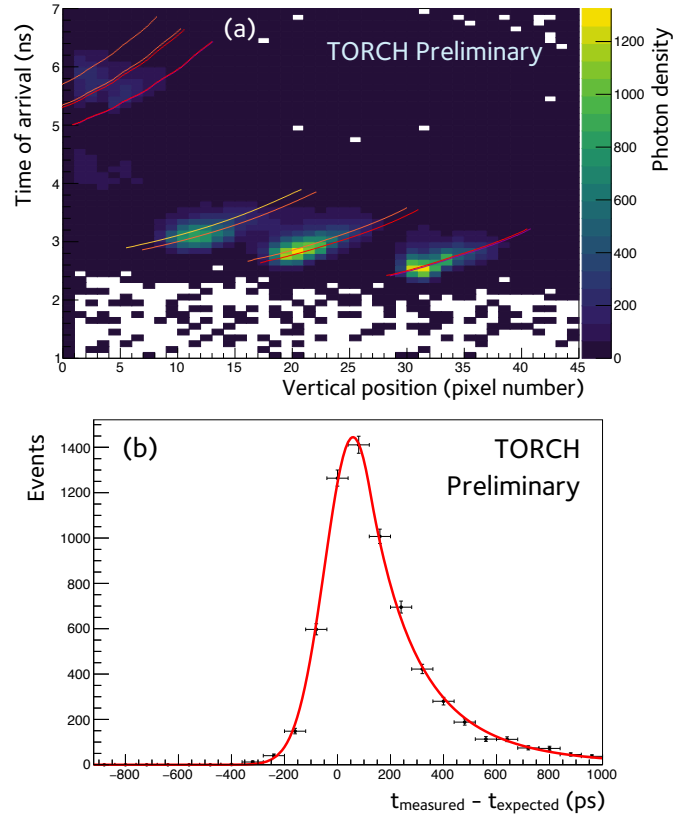


Figure 2: (a) The time-of-arrival of single Cherenkov photons from a 5 GeV/c pion beam, relative to a beam time-reference station, as a function of detected vertical column pixel number. The overlaid lines represent the simulated patterns for light reflected only off the front and back faces of the radiator plate (lower right distribution), light also undergoing one and two reflections off the side faces (lower central and left distributions, respectively), and multiple reflections from the bottom horizontal face (top left distributions). (b) The distribution of residuals between the measured Cherenkov photon arrival times with respect to the simulated distribution, with a “crystal ball” fit superimposed.

References

- [1] M. Charles and R. Forty: TORCH: Time of flight identification with Cherenkov radiation, *Nucl. Instrum. Methods A*639 (2011) 173 – 176.
- [2] N. Brook et al., Testbeam studies of a TORCH prototype detector, submitted to *Nucl. Instrum. Methods*, URL <https://arxiv.org/abs/1805.04849>.
- [3] The LHCb Collaboration, Expression of Interest for a Phase-II LHCb Upgrade: Opportunities in flavour physics, and beyond, in the HL-LHC era, CERN-LHCC-2018-003 (2017).
- [4] T. Conneely et al., The TORCH PMT: a close packing, multi-anode, long life MCP-PMT for Cherenkov applications, *Journal of Instrumentation* vol. 10 (2015), no. 05: C05003.
- [5] T. M. Conneely, J. S. Milnes, J. Howorth (Photek Ltd), Characterisation and lifetime measurements of ALD coated microchannel plates in a sealed photomultiplier tube, *Nucl. Instr. and Meth.*, A732 (2013) 388–391.
- [6] T. Gys et al., The TORCH detector R&D: Status and perspectives, *Nucl. Instrum. Methods A*876 (2017) 156 – 159.
- [7] R. Gao et al., Development of TORCH readout electronics for customised MCPs, *Journal of Instrumentation* 11 (2016) C04012.
- [8] M. Despeisse, F. Powolny, P. Jarron and J. Lapington, Multi-Channel Amplifier-Discriminator for Highly Time-Resolved Detection, *Nuclear Science, IEEE Transactions* 58 (2011) 202 – 208.
- [9] J. Christiansen, High Performance Time to Digital Converter, CERN/EP-MIC (2002).