



Performance of the ATLAS RPC detector and Level-1 muon barrel trigger at $\sqrt{s} = 13$ TeV

ICNFP 2019 – Crete

Marco Sessa

on behalf of the ATLAS collaboration



University of Science and Technology of China

26th August 2019




Outline

- The ATLAS Level-1 muon barrel trigger
- The ATLAS Resistive Plate Chambers
- Performance studies based on Run-2 data-taking
- Summary and conclusions

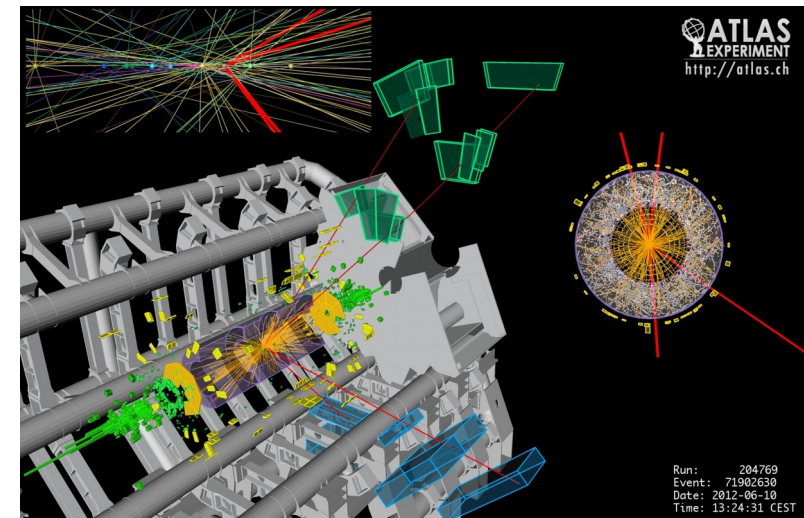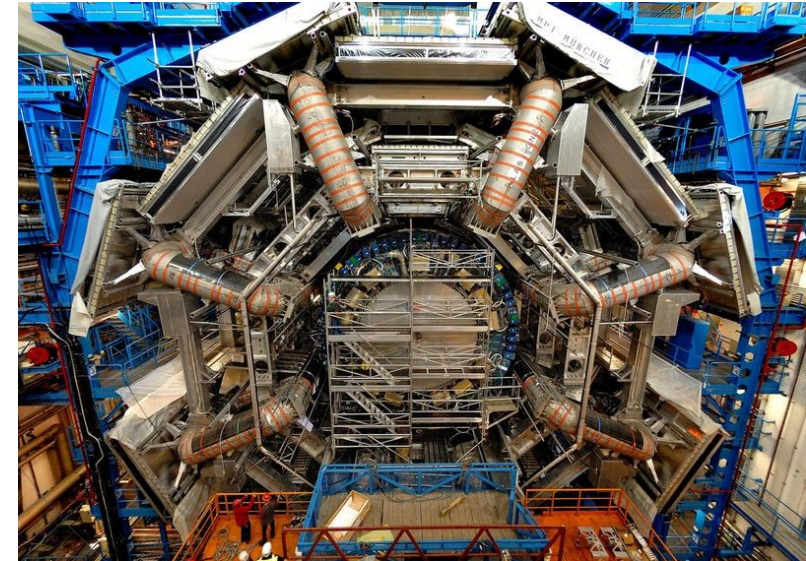




The ATLAS muon barrel trigger

- The Level-1 Muon Barrel Trigger is one of the main elements of the online event selection of the ATLAS experiment at the Large Hadron Collider (ATLAS trigger latency $\sim 2.5 \mu\text{s}$)
- It exploits the Resistive Plate Chambers (RPC) detectors to generate the trigger signal \rightarrow Intrinsic time resolution $\sim 1 \text{ ns}$ (for 2 mm gas-gap)
- The RPCs are placed in the barrel region of the ATLAS experiment: they are arranged in three concentric double layers at radius 7 m and 10 m, operating in a toroidal magnetic field of about 0.5 T
- The Level-1 muon barrel trigger allows to select muon candidates according to their transverse momentum and associates them with the correct bunch-crossing

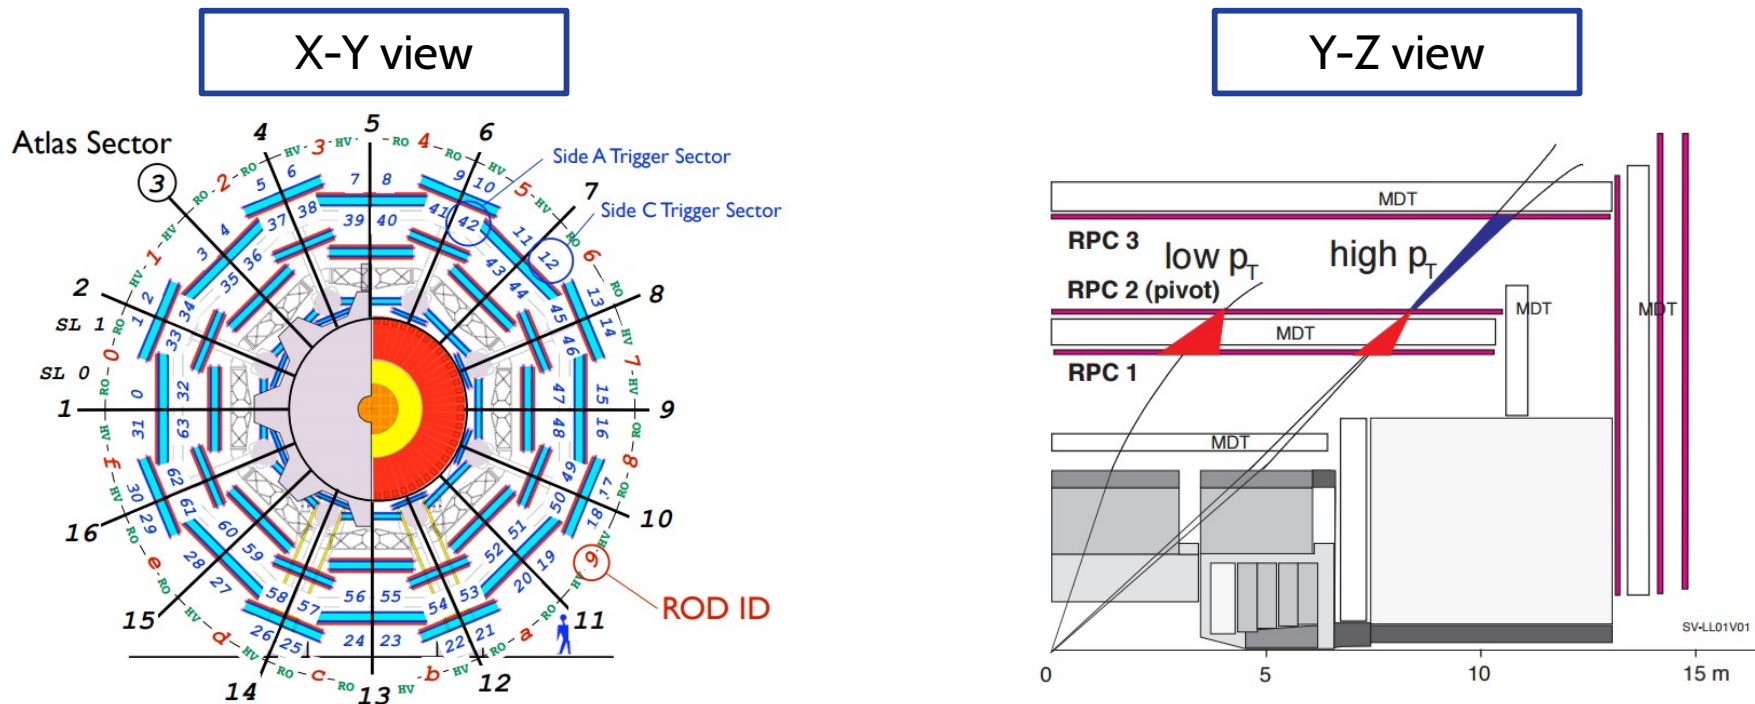

The ATLAS Resistive Plate Chambers


- Each RPC detector consists of two gas gaps (2 mm width), read out by two orthogonal planes of strips, in η and ϕ views, with a width of 25-35 mm
- Gas mixture of $C_2H_2F_4 : C_4H_{10} : SF_6$ (94.7 : 5.0 : 0.3)% operated in saturated avalanche mode at 9.6 kV nominal
- RPC detectors cover the pseudo-rapidity range $|\eta| < 1.05$ ($\theta < 38^\circ$) for a total surface of about 4000 m² and ~3600 gas volumes (with 380k readout channels)
- Besides to provide trigger, RPC is the only system in the barrel Muon Spectrometer that provides the ϕ coordinate of the muon tracks

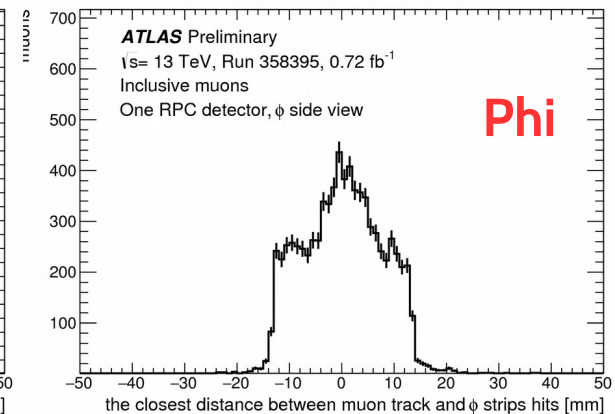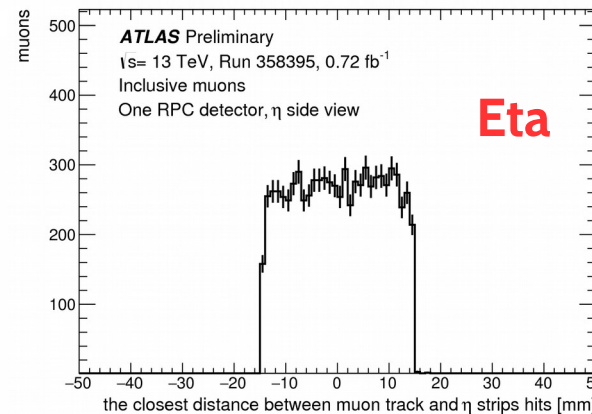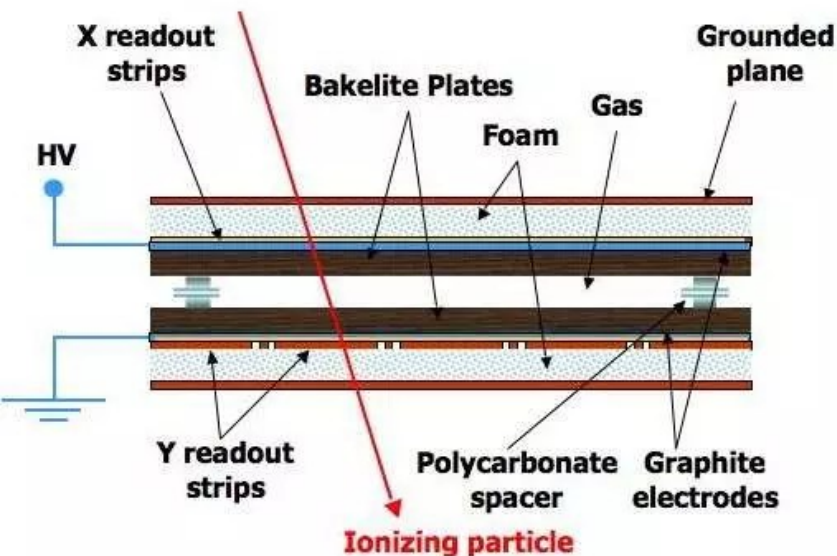

closest distance between muon track and strip hits

The Level-1 muon barrel trigger logic

- The RPC trigger system consists of 432 projective trigger towers. It is able to construct and provide to the HLT a Region of Interest (RoI) with a granularity of $\Delta\eta \times \Delta\phi = 0.1 \times 0.1$ (~3600 Rols)
- The Level-1 muon barrel trigger logic is based on the coincidence of hits from different RPC layers (both in η and ϕ projections)
- Two different p_T -regimes exist:
 - the **low- p_T trigger** requires a coincidence between the two innermost RPC stations (RPC1 and RPC2). It is used to select muons with p_T above 4 GeV (MU4), 6 GeV (MU6) and 10 GeV (MU10). They are used mainly for multi-object triggers and B-physics
 - the **high- p_T trigger** requires an additional confirmation on the third external station (RPC3) and selects muons with p_T above 10 GeV (MU11) and 20 GeV (MU20 and MU21). MU20 is the lowest unprescaled single-muon trigger threshold


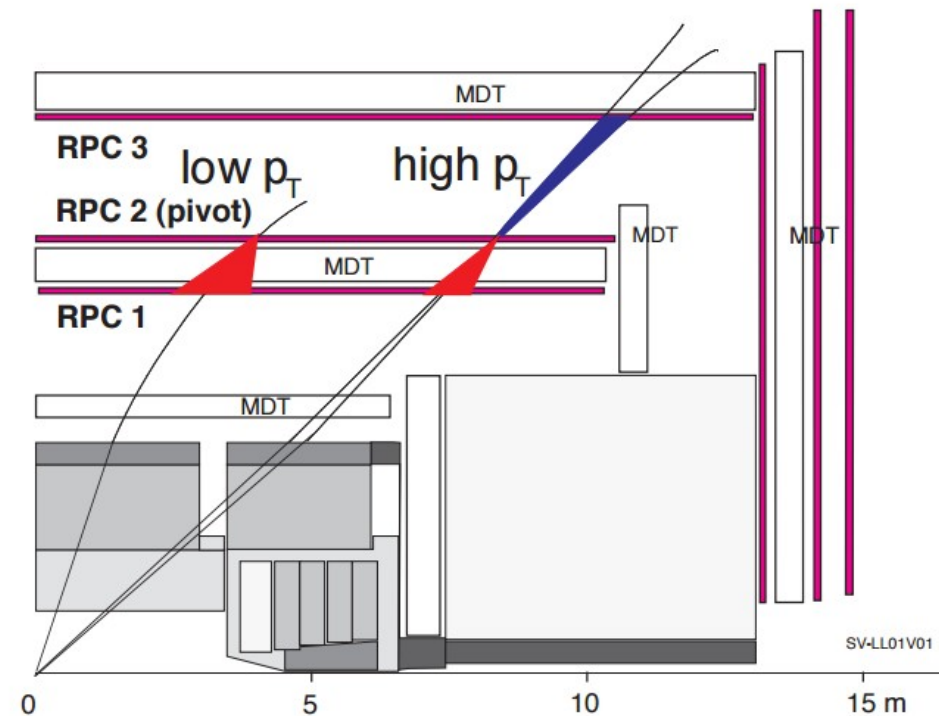


RPC detector efficiency

- RPC detector efficiency is computed as the fraction of hits matched with the extrapolated position of the muon track within a distance of 30 mm from the centre of the strip and within 12.5 ns from the triggered bunch crossing (BCO)

Strip hit multiplicity and detector efficiency for η and ϕ side views

Detector efficiency for η and ϕ side views for each ATLAS run recorded in 2018
 → stable performance during the year

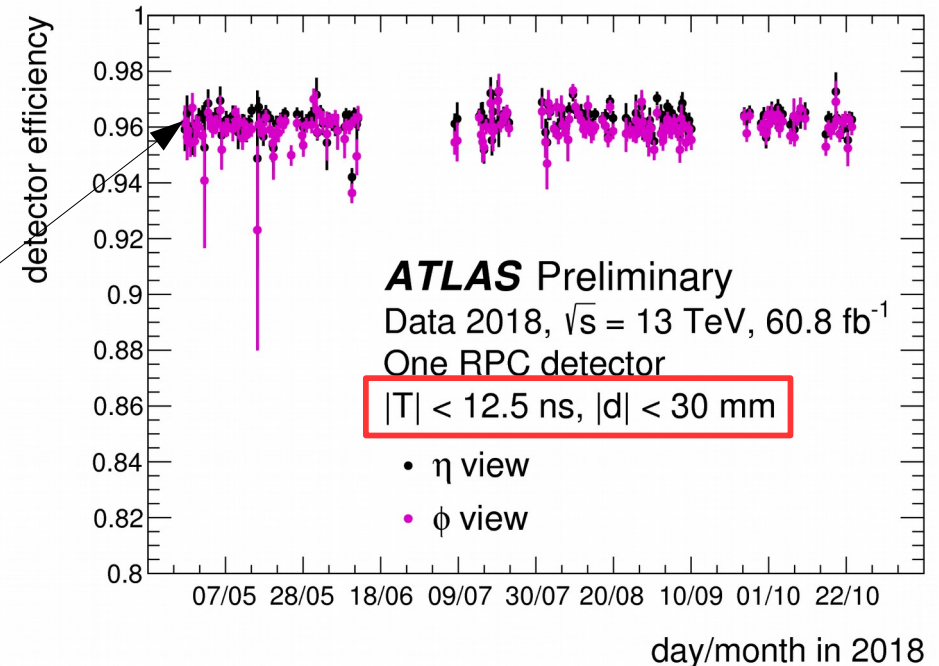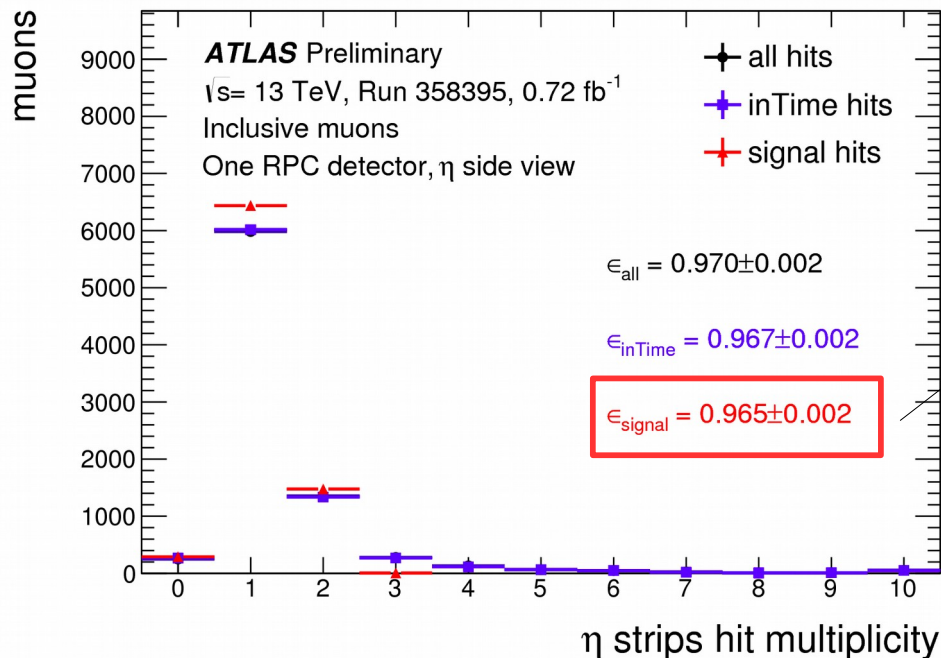

RPC detector efficiency



- RPC detector efficiency is computed as the fraction of hits matched with the extrapolated position of the muon track within a distance of 30 mm from the centre of the strip and within 12.5 ns from the triggered bunch crossing (BCO)

Distribution of the panel efficiencies
of all live RPC panels in 2018

High efficiency for most of the panels

Mean detector efficiency as a function of
time of all live RPC panels in 2018


Each point corresponds to a different
run recorded in 2018 → stable performance
during the full data-taking period

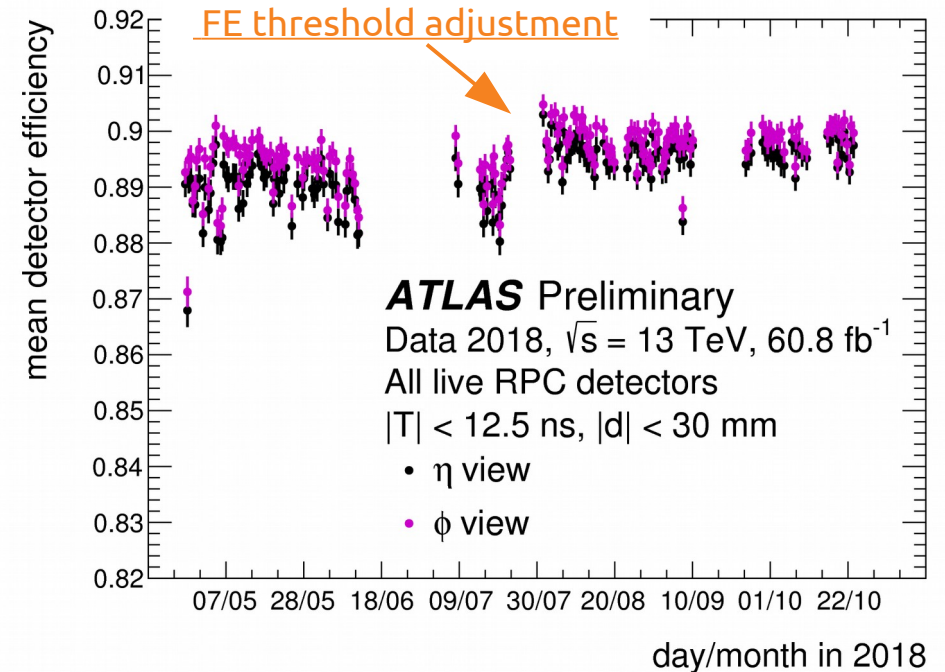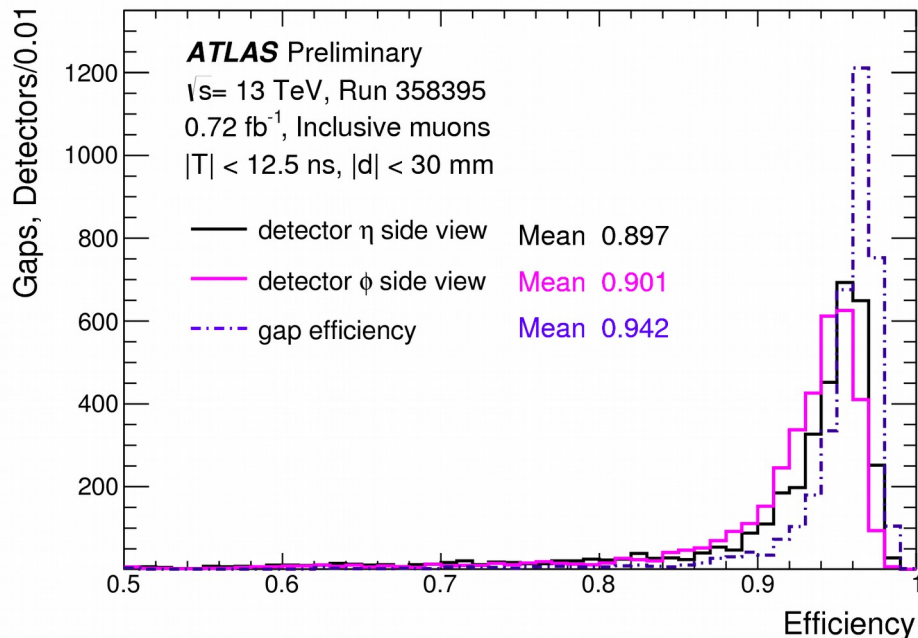


Hit position reconstruction

- Detector alignment and correct cabling are investigated using the correlation between the expected and measured muon positions
- Most of the panels perform properly, with most of the entries in the diagonal
- Actions are taken depending on the specific case

One representative RPC gas volume:
 η panel

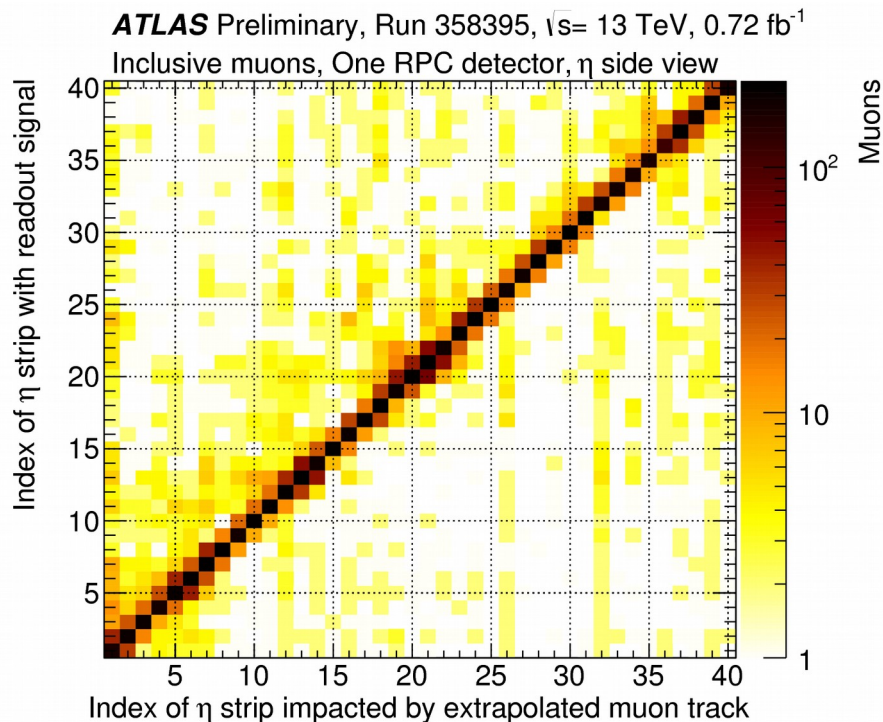


One representative RPC gas volume:
 ϕ panel

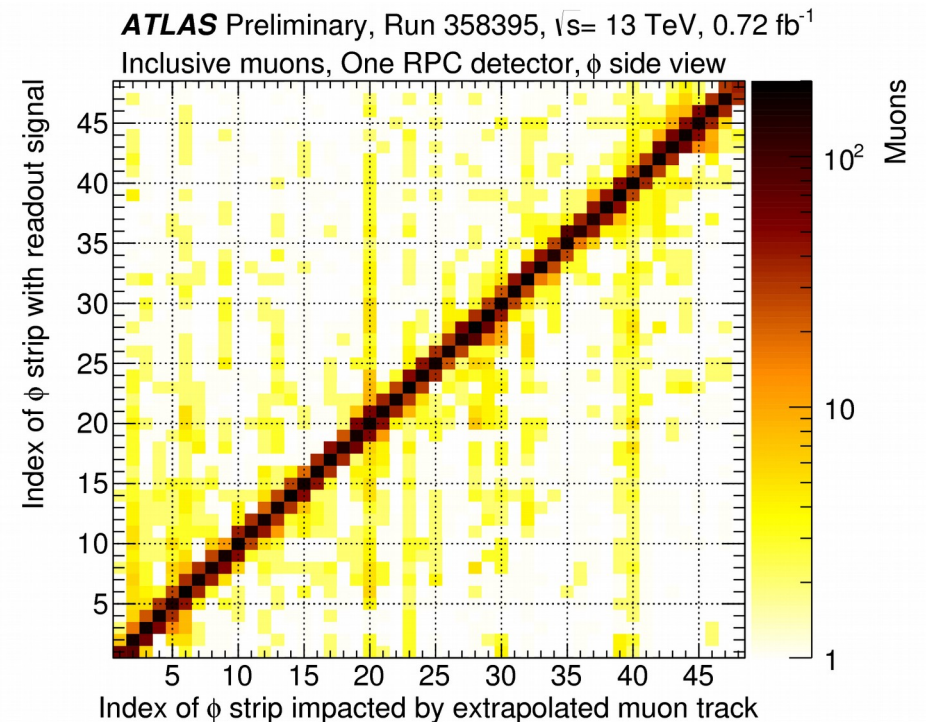


Trigger efficiency

- Trigger efficiency investigated using unbiased muons from Z boson decays ($Z \rightarrow \mu\mu$ Tag&Probe)
- Efficiency limited in the barrel region by toroid support structures and ATLAS “feet” supports
- Further reduction due to gas-gaps disconnected from HV (gas leaks) \rightarrow mostly located on the external layer (BO chambers)

Trigger efficiency x Acceptance as a function of η and ϕ

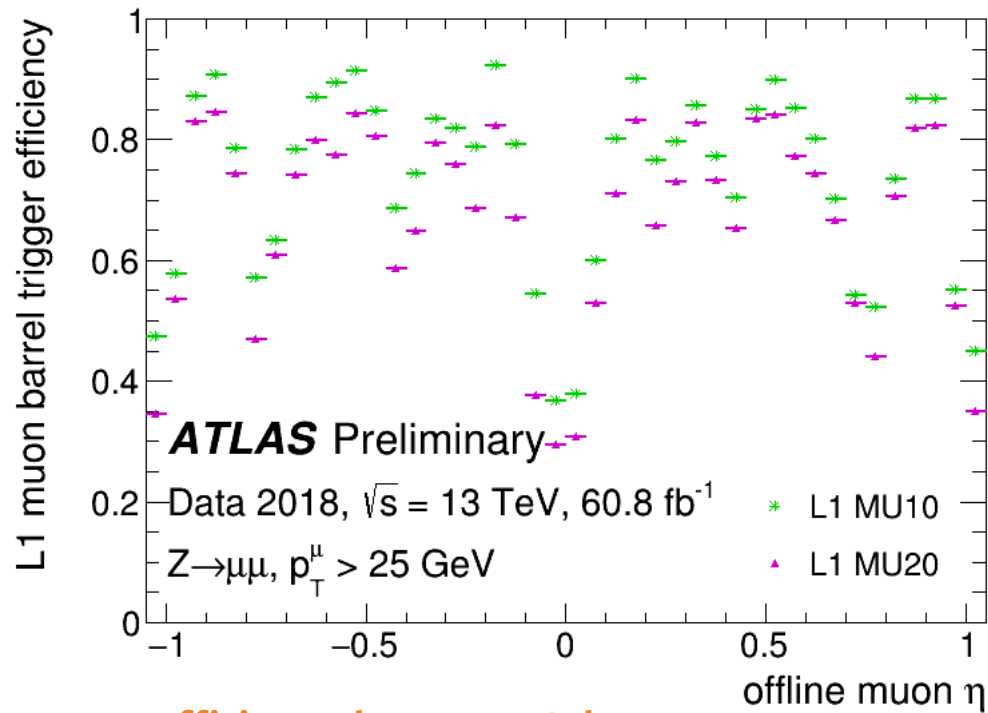

Efficiency drop at $\eta = 0$ due to the ATLAS services

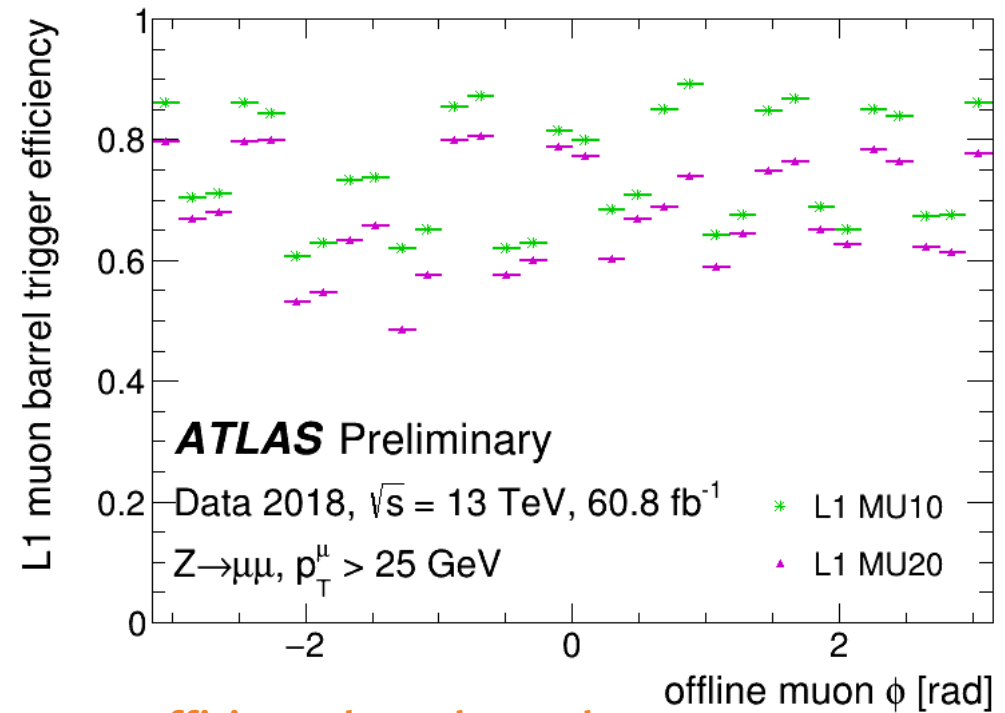


Efficiency drops due to the toroid ribs in the small sectors

Trigger efficiency

- Trigger efficiency investigated using unbiased muons from Z boson decays ($Z \rightarrow \mu\mu$ Tag&Probe)
- Efficiency limited in the barrel region by toroid support structures and ATLAS “feet” supports
- Further reduction due to gas-gaps disconnected from HV (gas leaks) \rightarrow mostly located on the external layer (BO chambers)

Trigger efficiency x Acceptance as a function of muon transverse momentum

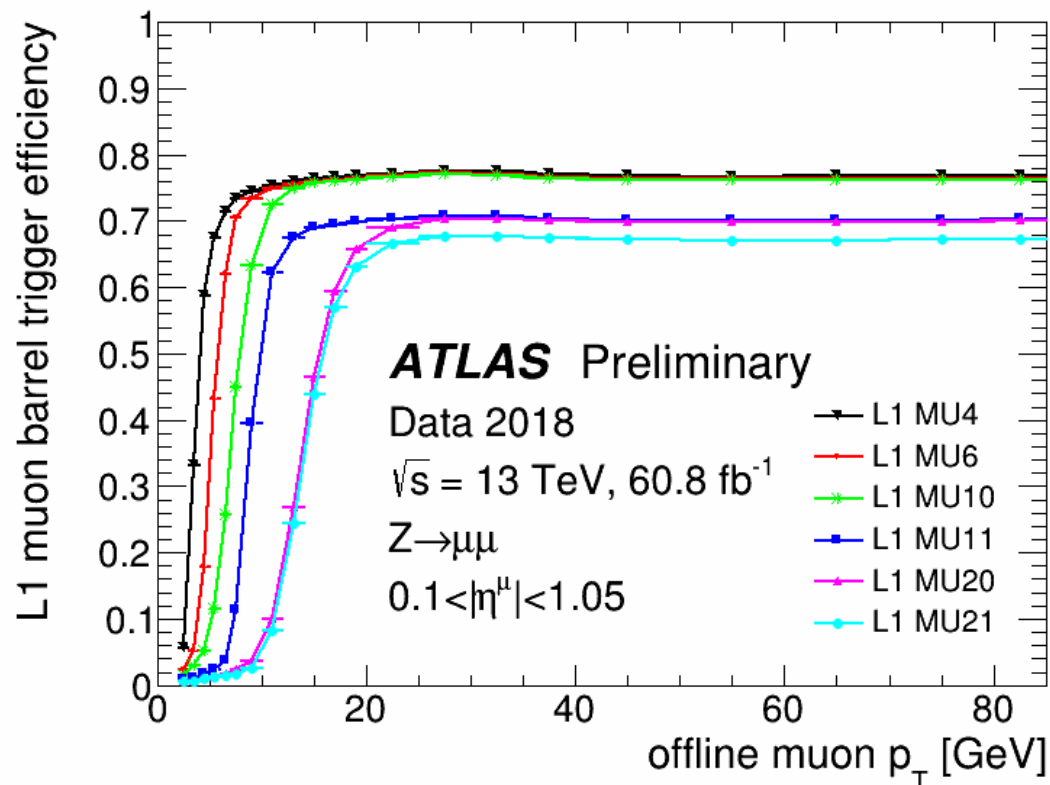


Plateau values:

- MU10 \rightarrow 76.5%
- MU20 \rightarrow 70.0%



Trigger efficiency stability

- Trigger efficiency is one of the key parameters of the Level-1 muon barrel trigger → monitored in each single run
- Plateau values of the trigger efficiency as a function of time for six different Level-1 thresholds
- Each point corresponds to a different ATLAS run recorded in 2018 during pp collisions at centre-of-mass energy $\sqrt{s} = 13$ TeV
- Very good stability during the year has been achieved

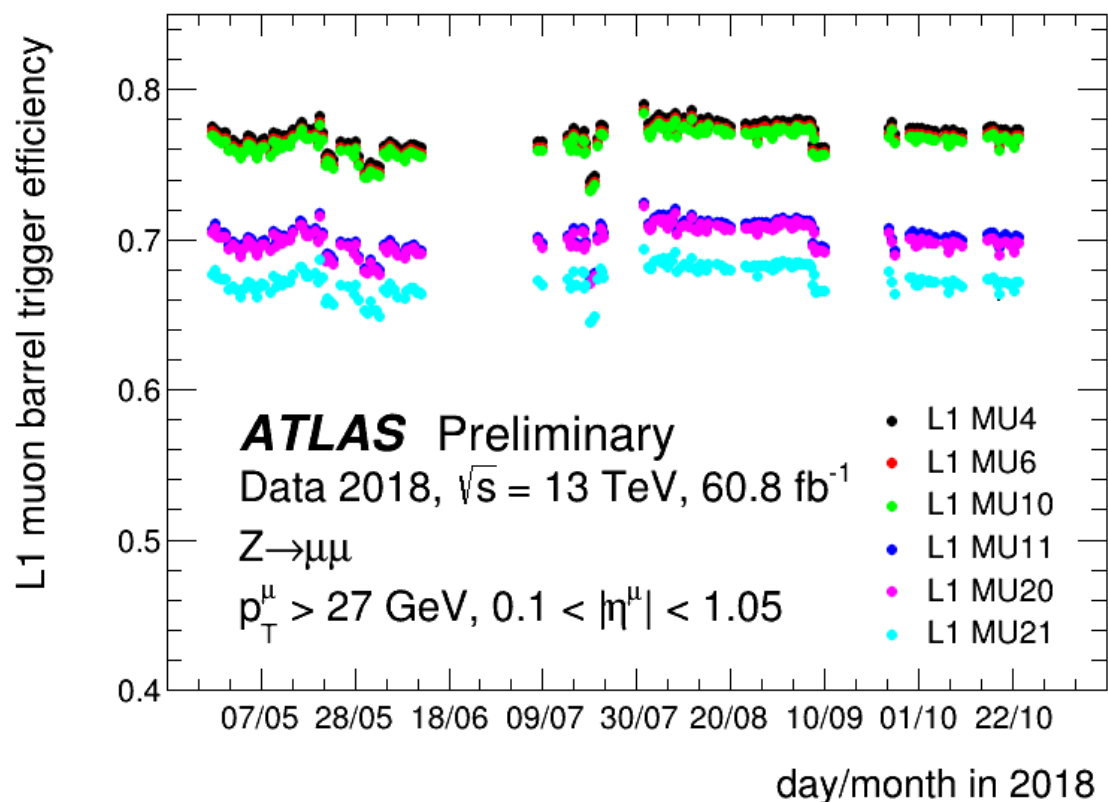

Timing performance



- Correct bunch crossing (BC) association is one of the main requirements of the Level-1 muon barrel trigger
- Hits from various RPC detectors are calibrated in order to provide the correct timing
- The “online” calibration is performed using programmable delays in steps of 1/8 BC (3.125 ns)
- 99.6% of the Level-1 muon barrel triggers are associated to the correct BC

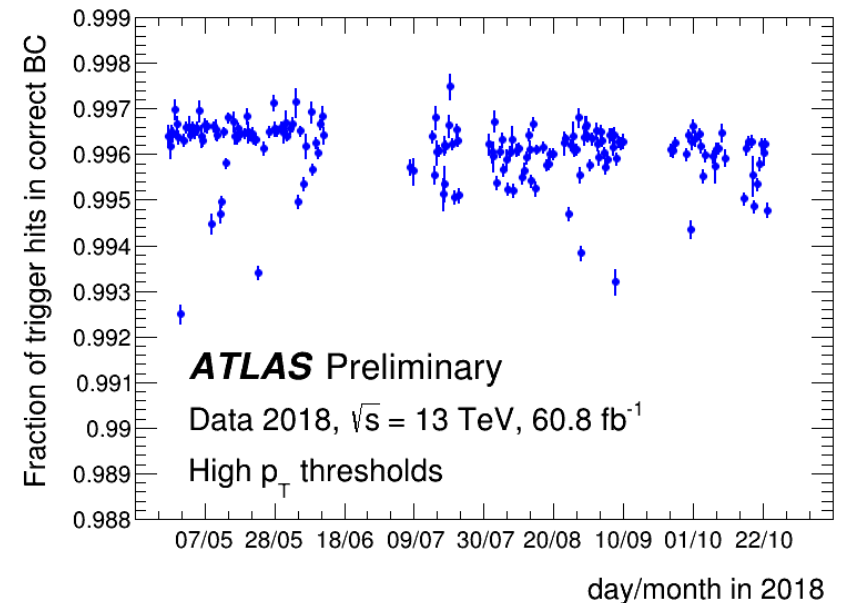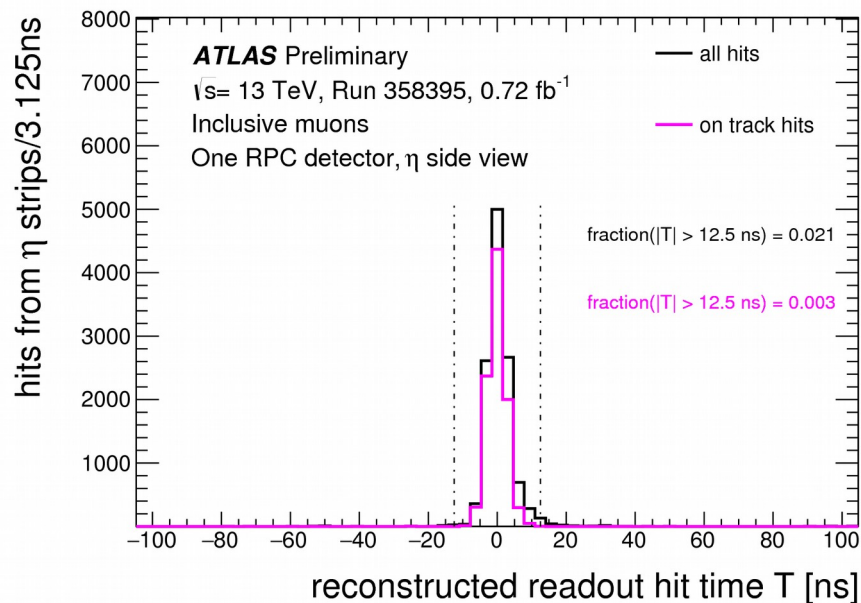

Each point corresponds to a different ATLAS run recorded in 2018
Stable performance during the full year



Studies for HL-LHC

- Study the response of few RPC chambers with lower HV and thresholds
- At HL-LHC ($5 - 7.5 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$) the integrated charge collected in the avalanche will be enough high to limit the detector lifetime
- In order to keep the performance of current system stable during years, it is needed to lower the HV in the RPC gas-gaps (9.6 kV \rightarrow 9.2 kV). At the same time, new RPCs will be installed in the innermost layer of the Muon Barrel Spectrometer to increase the redundancy of the trigger system and the trigger efficiency
- This study demonstrates that part of the efficiency lost by reducing the RPC HV can be recovered by lowering the thresholds of the Front-End discriminator (10% on average)

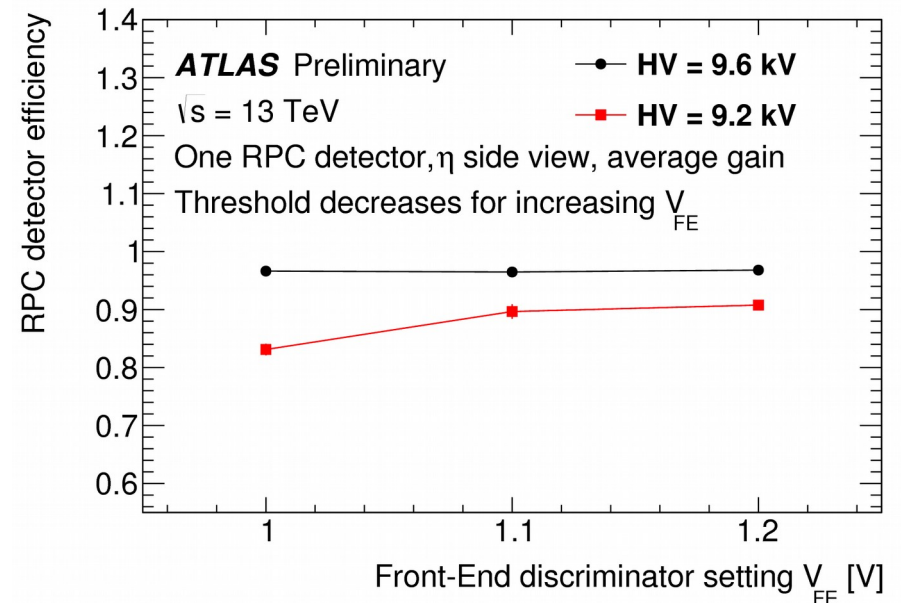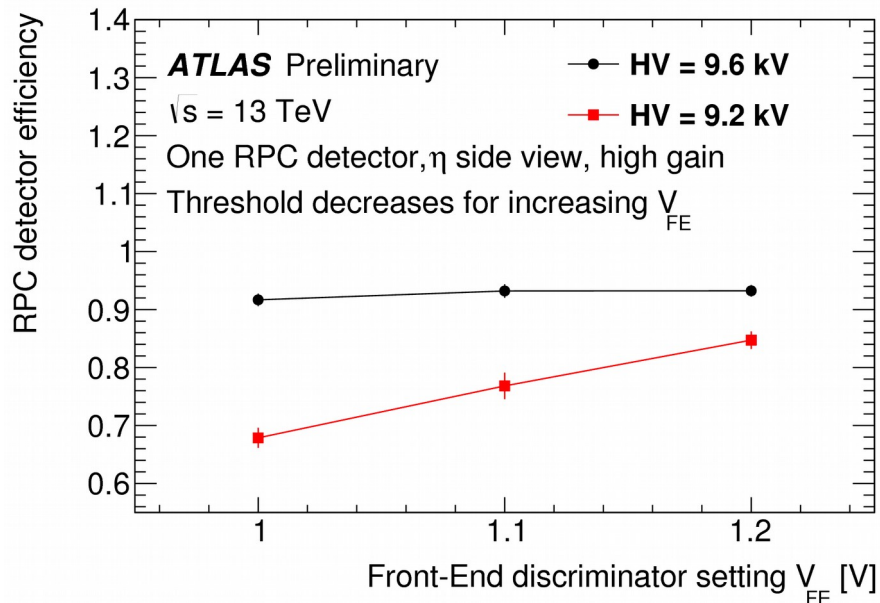

Studies for HL-LHC

- Gas-gap currents (normalized to the gap area) as a function of instantaneous luminosity with 2018 data
- Aim to predict safe operating HV settings for each gas gap for HL-LHC
- Current proportional to the luminosity → this shows that the present RPC system is in a very good status

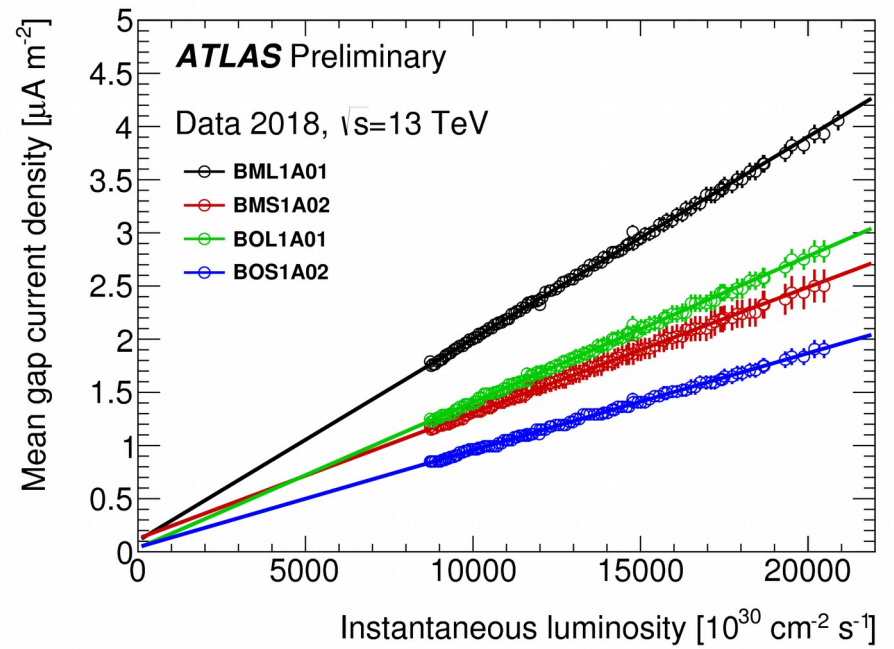
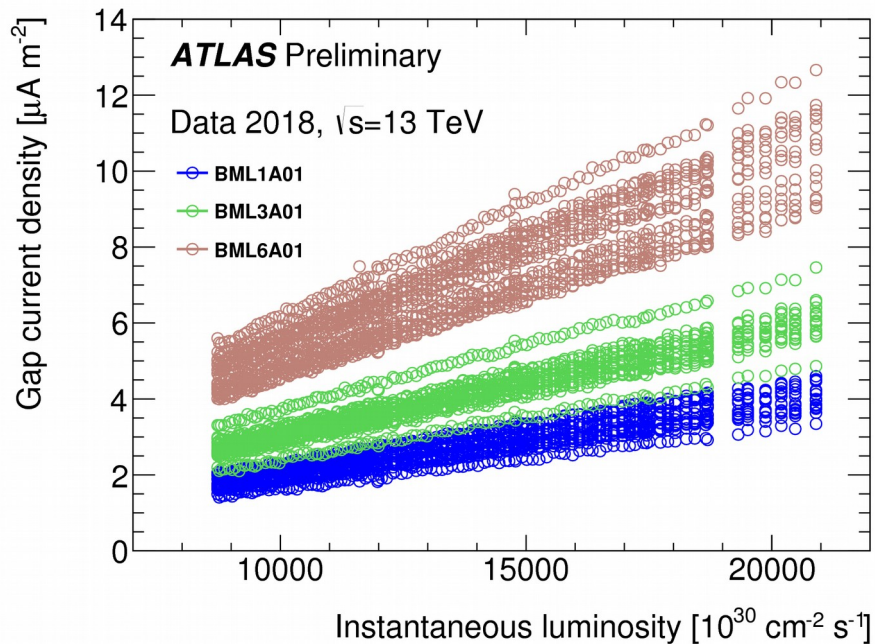


Summary and conclusions


- Muon triggers are of crucial importance for fulfilling the physics program of the ATLAS experiment
- L1 muon barrel trigger is the largest RPC system in a collider experiment
- ATLAS RPCs worked for long time with stable performance (both detector and trigger efficiencies) and operations for ~10 years, even with a factor of 2 larger than the design instantaneous luminosity → no signs of ageing observed
- Very large effort to monitor the RPC performance continuously during the year
- No major upgrades are foreseen for Run-3, but for Phase-II a completely new trigger system is expected (RPC in the BI layer + new trigger electronics) → See talk from Luca Pizzimento

Back-up slides



ATLAS data-taking performance during 2018

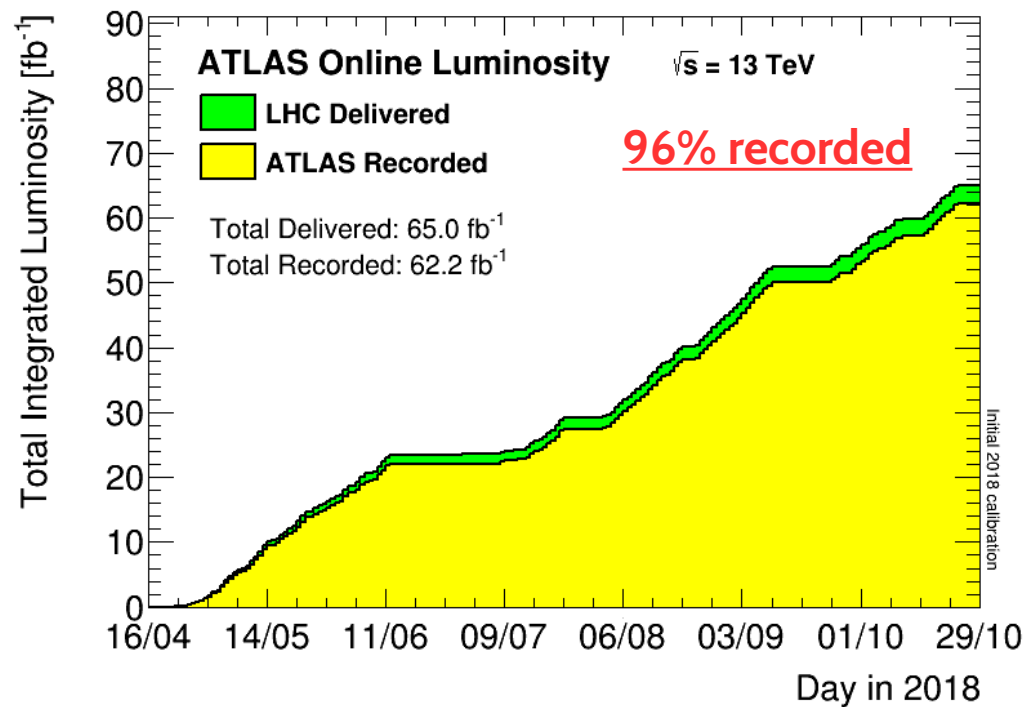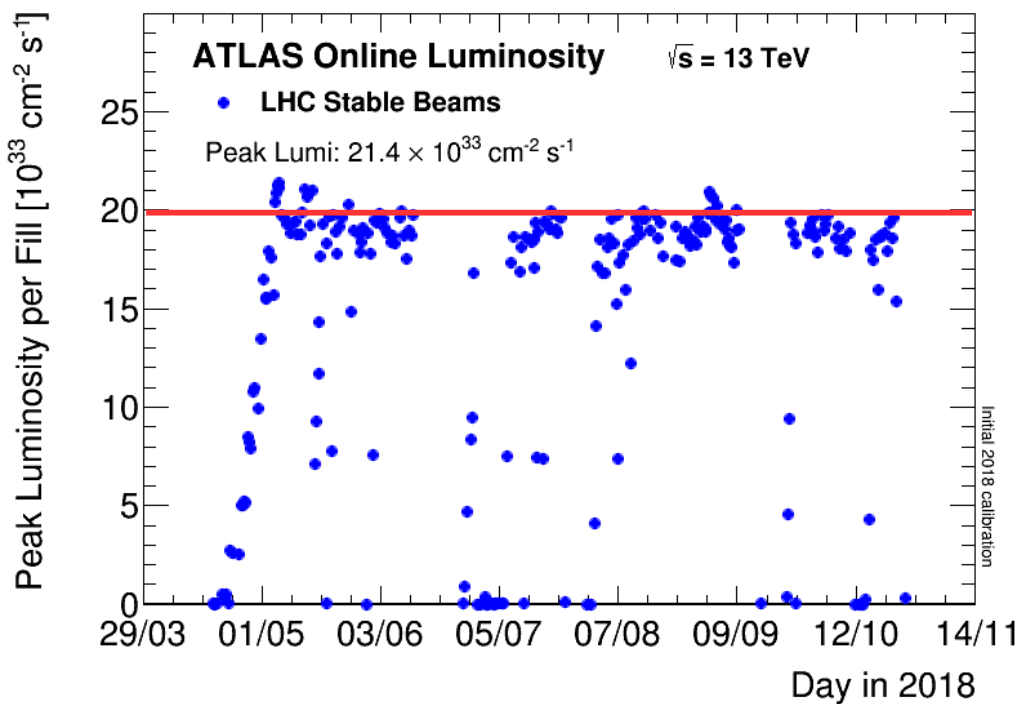

Muon barrel acceptance limits

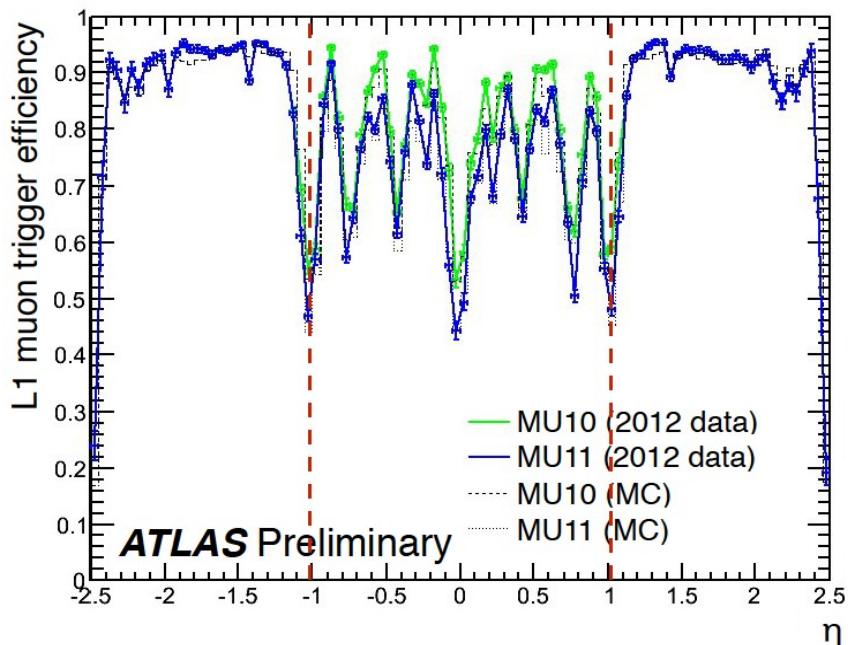

- Acceptance holes of the Level-1 muon barrel trigger ~22%
- Holes due to toroid ribs (Small Sectors) and Z=0 crack (Large Sectors) + holes in feet region and bottom sector (elevator)

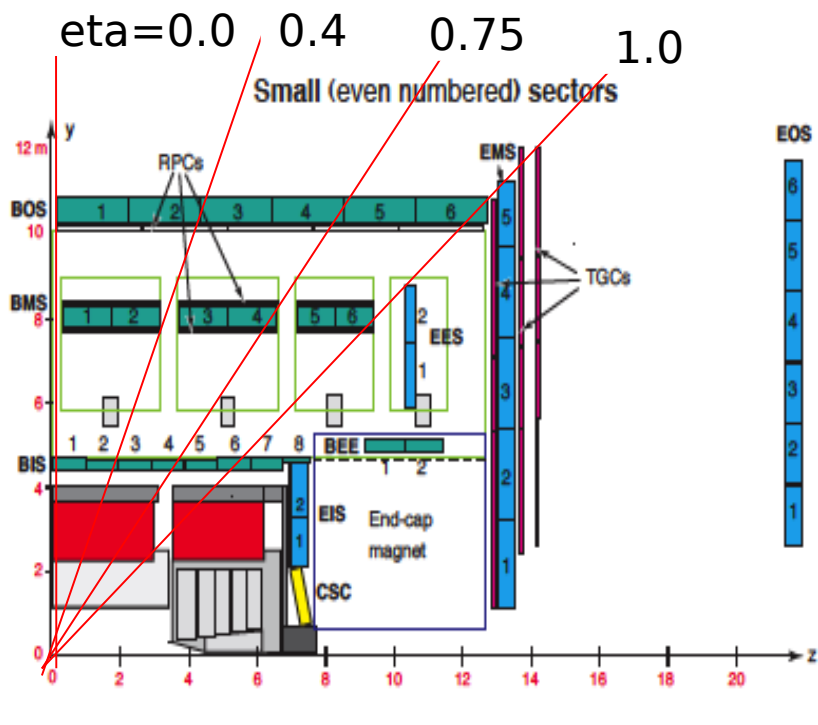
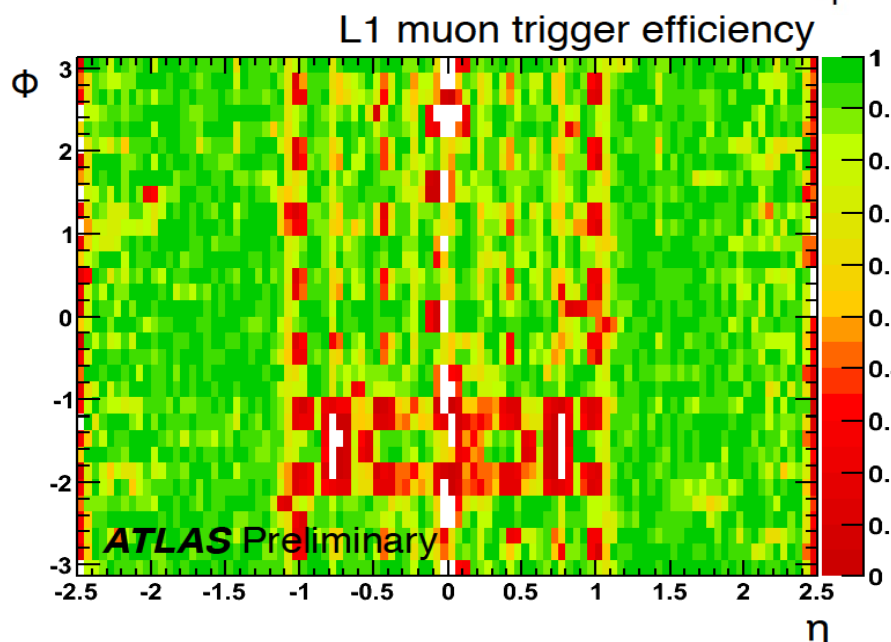


Level-1 muon barrel trigger: feet region


Upgrade project to cover acceptance holes in the “feet” sectors (12-14) 4th RPC layer
2.8% increase of barrel acceptance

20 RPC chambers installed before 2008, equipped with services and electronics during long shutdown 2013-2014



Special trigger “towers” implementing simple two-station coincidences (4 layers)

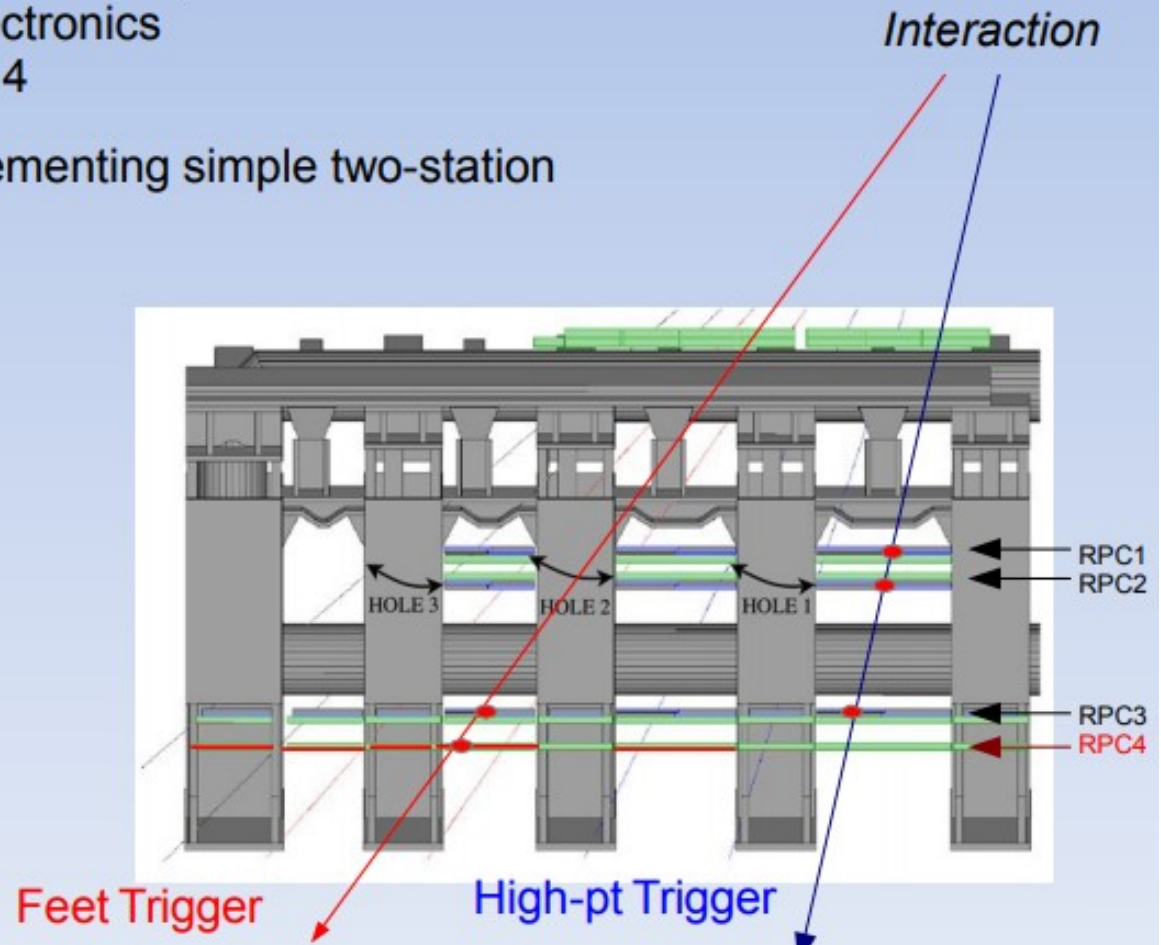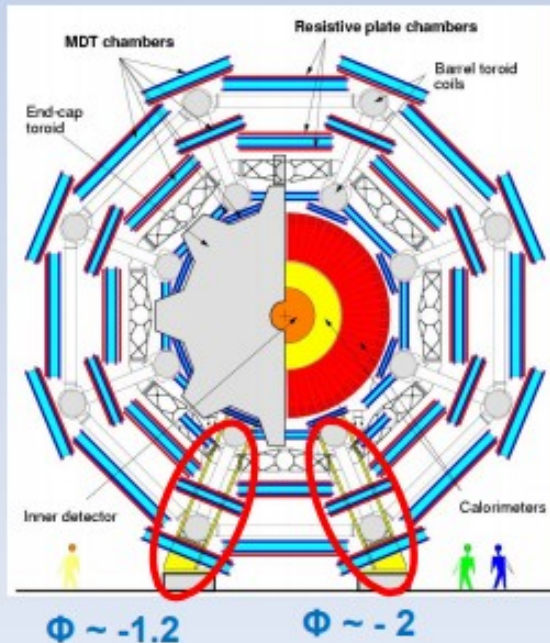

Level-1 muon barrel trigger: feet region

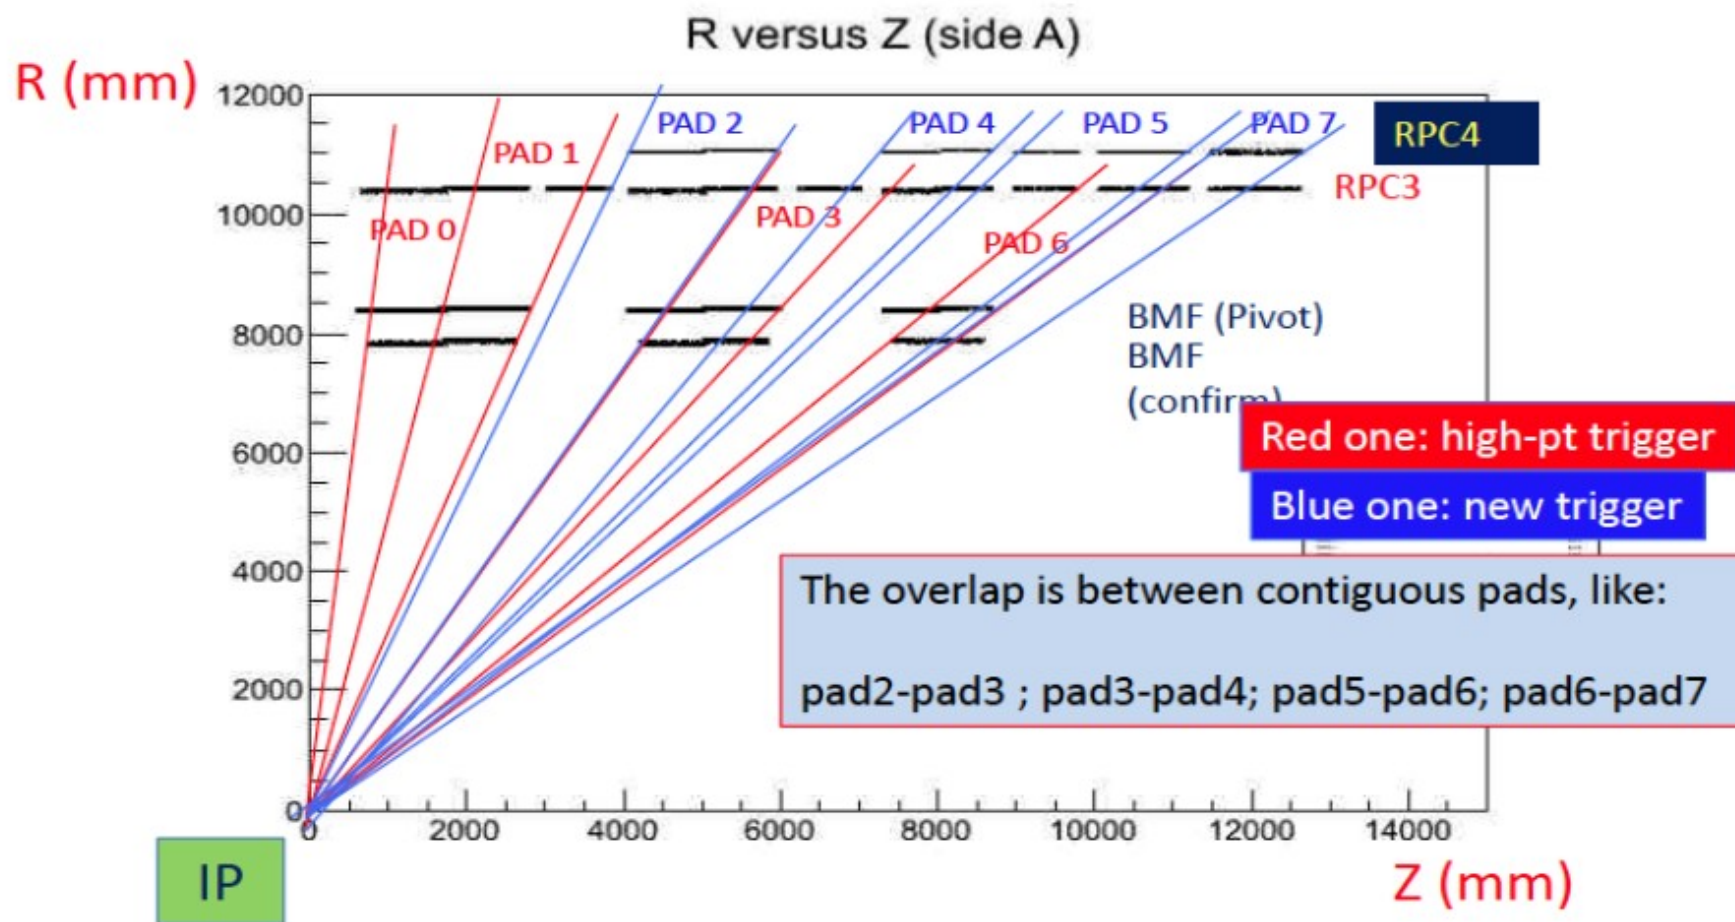


Trigger efficiency in one feet sector (2017)

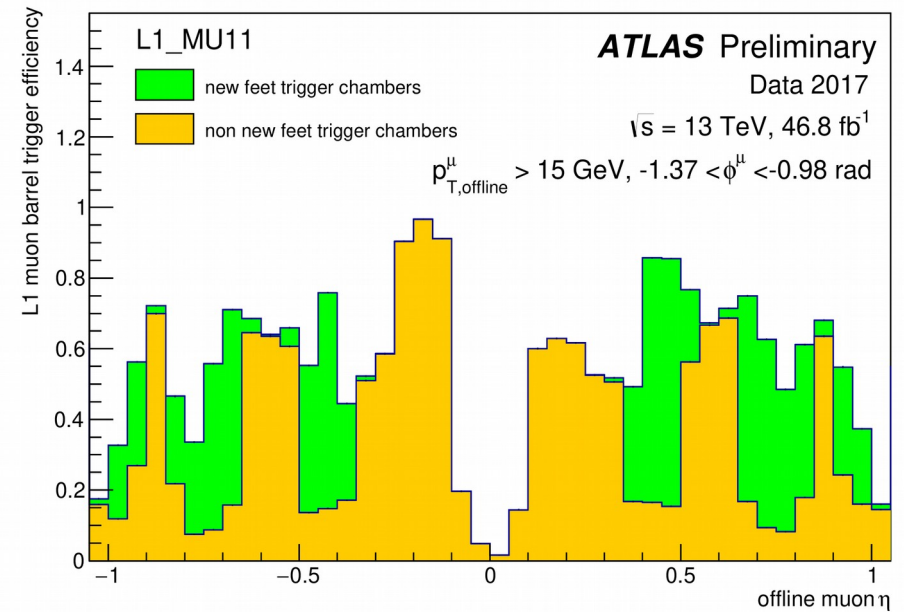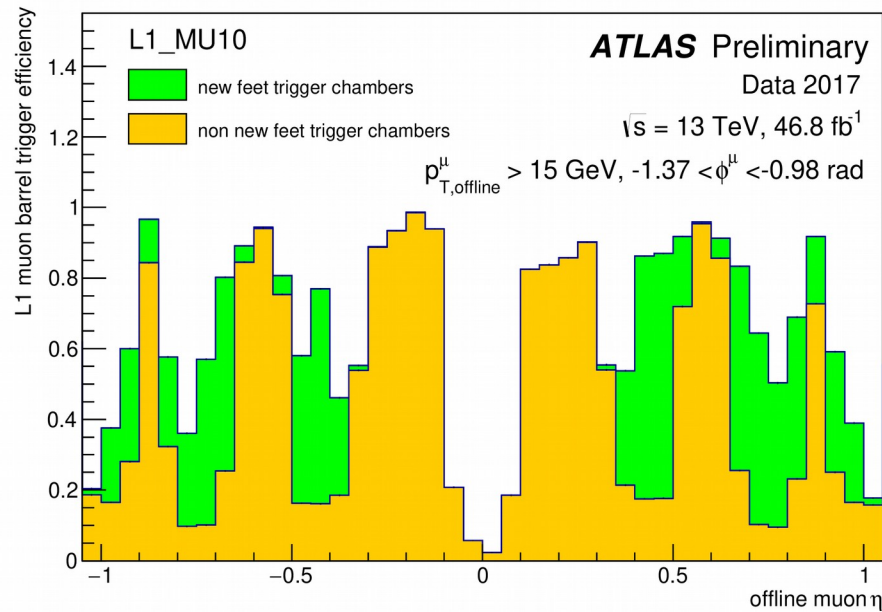


- The MU10 trigger requires that a candidate passed the 10 GeV threshold requirement of the Level 1 muon trigger system, using medium trigger chambers.
- The MU11 trigger requires that a candidate passed the 10 GeV threshold requirement of the Low- p_T Level 1 muon trigger system, with a coincidence with a High- p_T RPC chamber.
- The efficiency is measured on an inclusive sample selected using all non-muon Level 1 ATLAS triggers, in 13 TeV data from 2017 with 25 ns LHC bunch spacing.

Level-1 muon barrel trigger: sector 13

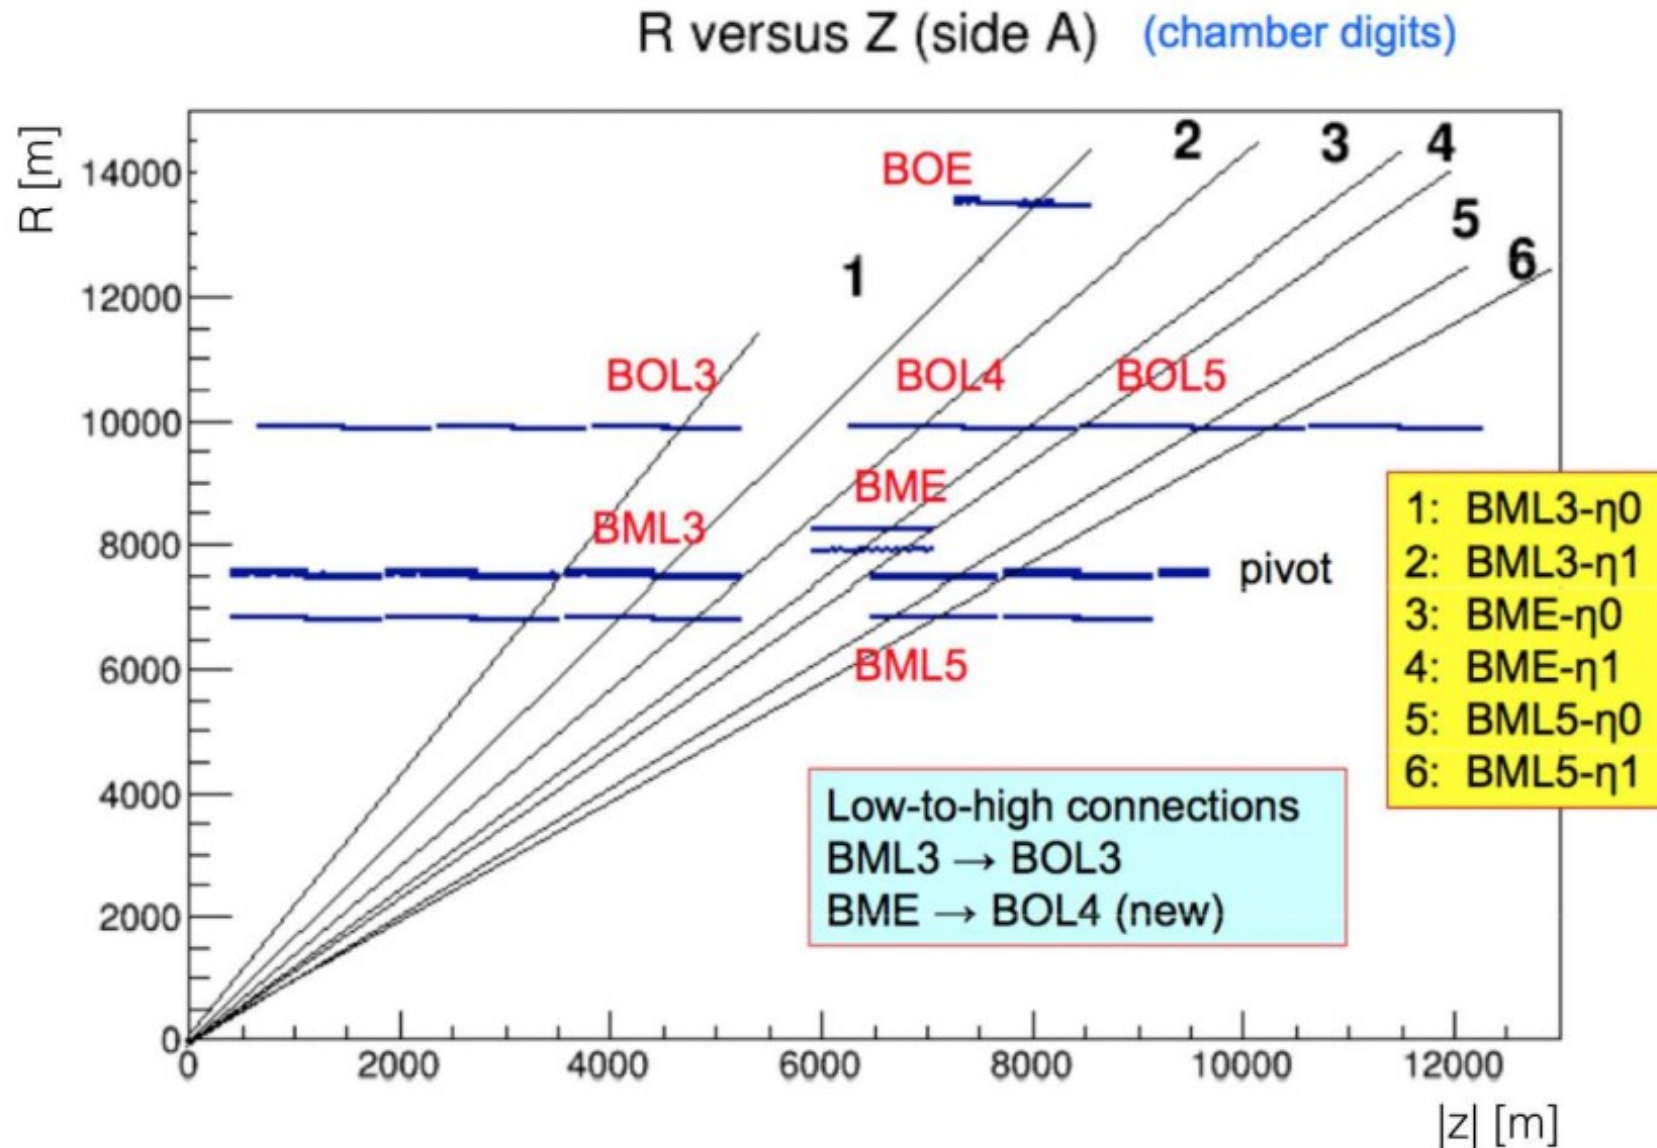

Trigger efficiency vs pile-up

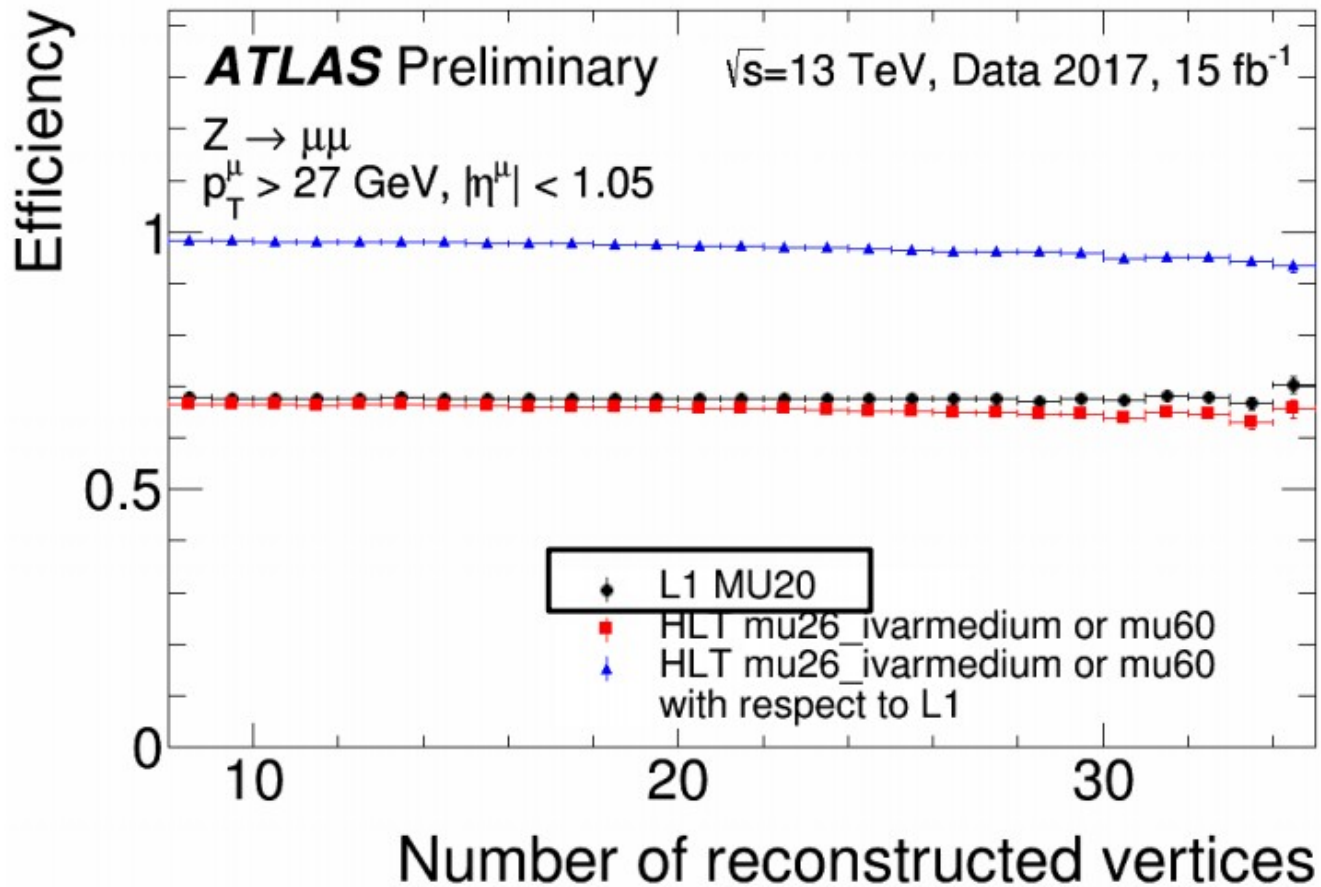

Trigger performance expected for Run-3


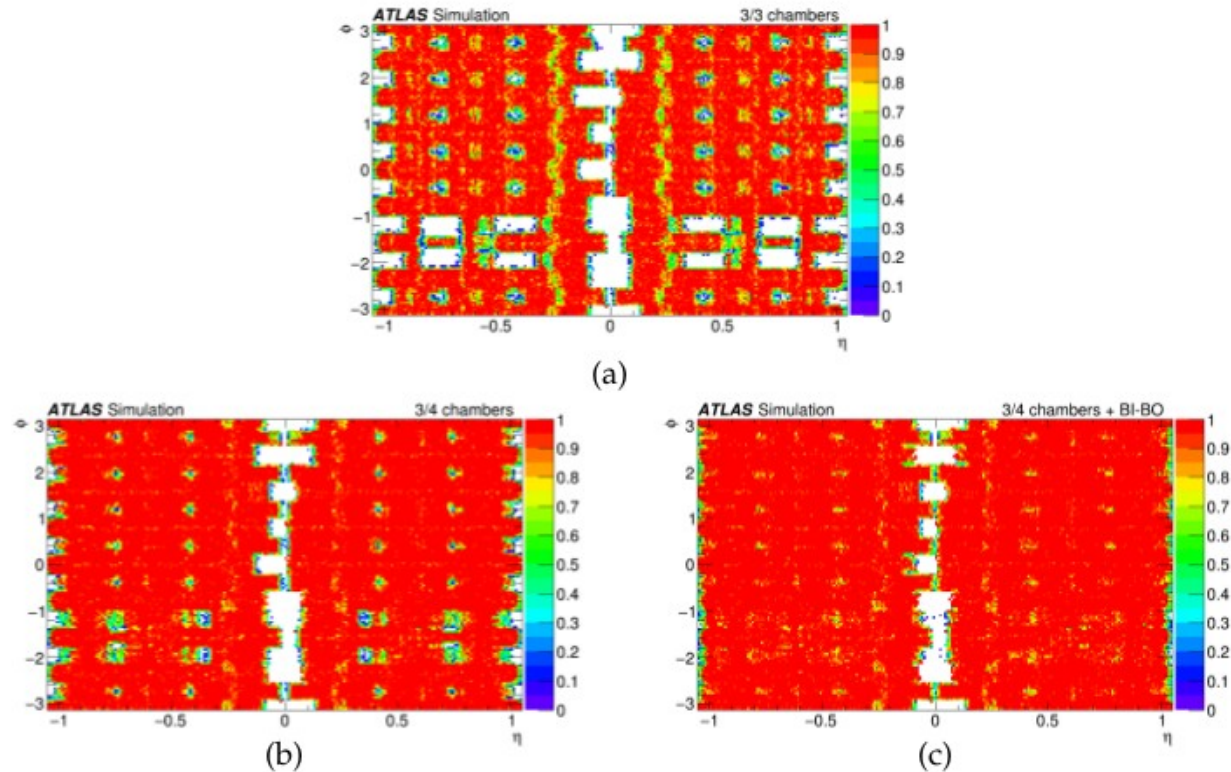



Figure 3.5: Geometrical acceptance of the L0 barrel trigger with respect to reconstructed muons with $p_T = 25$ GeV in the η - ϕ plane. Figures (a), (b), and (c) show the acceptance for the different trigger coincidence logic schemes: 3/3 chambers, 3/4 chambers, and 3/4 chambers + BI-BO, respectively

BM and BO efficiency (%)	Trigger efficiency \times acceptance (%)		
	3/3 chambers	3/4 chambers	3/4 chambers + BI-BO
100	78	91	96
90	73	90	95
80	62	87	93
Worst case	63	85	92


Lowered HV in BM and BO

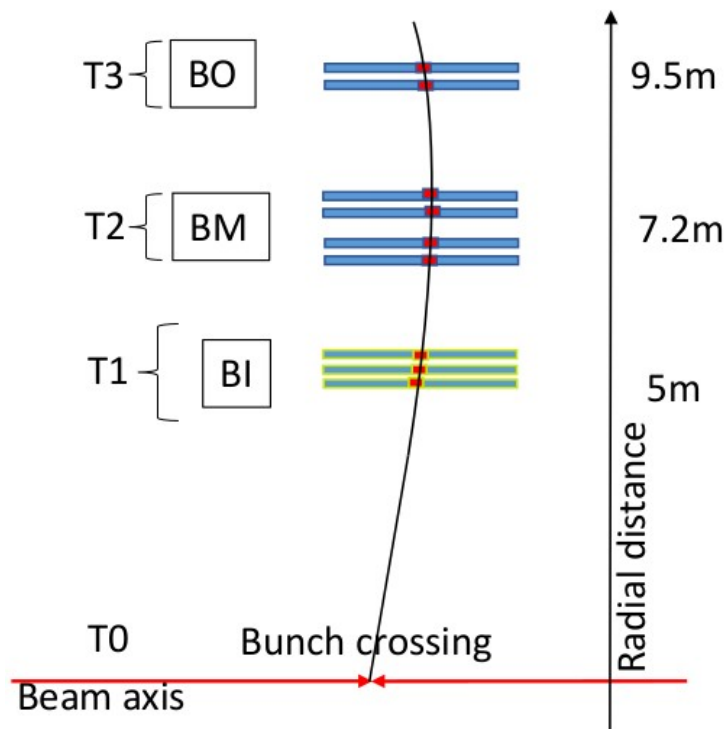

Trigger performance expected for Run-3

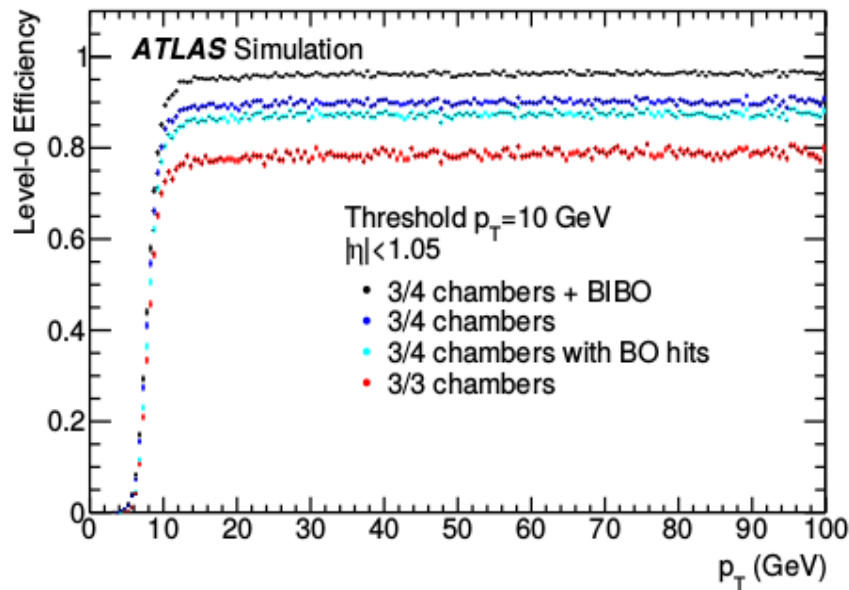

(a)

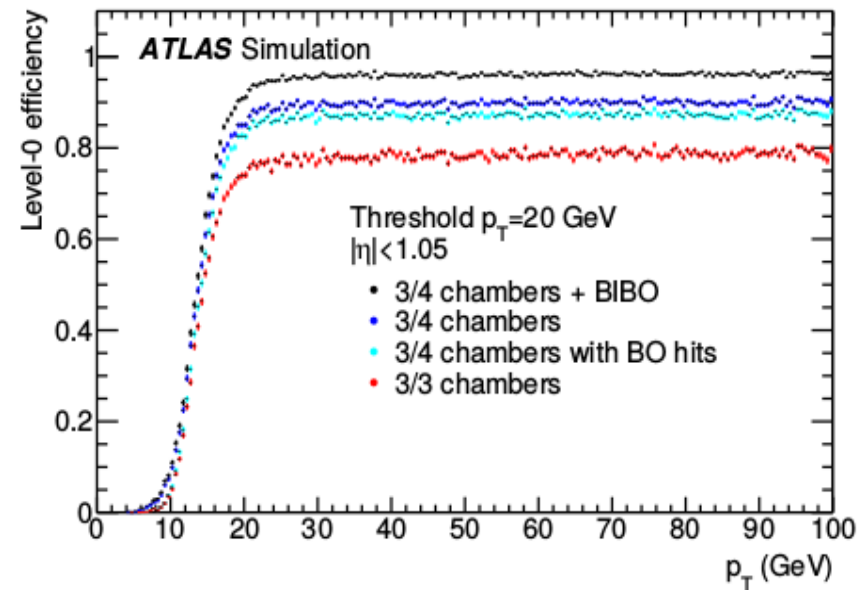

(b)

Requirement	Rate
3/3 chambers	20 kHz
3/4 chambers	30 kHz
3/4 chambers + BI-BO	85 kHz
3/4 chambers + BI-BO (*)	45 kHz

Expected rates at $7.5 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$
for L1 MU20

(*) indicates the rate for a BI-BO
trigger that is restricted to
acceptance gaps