



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Shuttle

(Test Sponsor: Advanced Micro Devices)

SPECint®_rate2006 = --

Shuttle SN25P (AMD Athlon 64 FX-60)

SPECint_rate_base2006 = 17.5

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2006

Hardware Availability: Feb-2006

Software Availability: May-2006

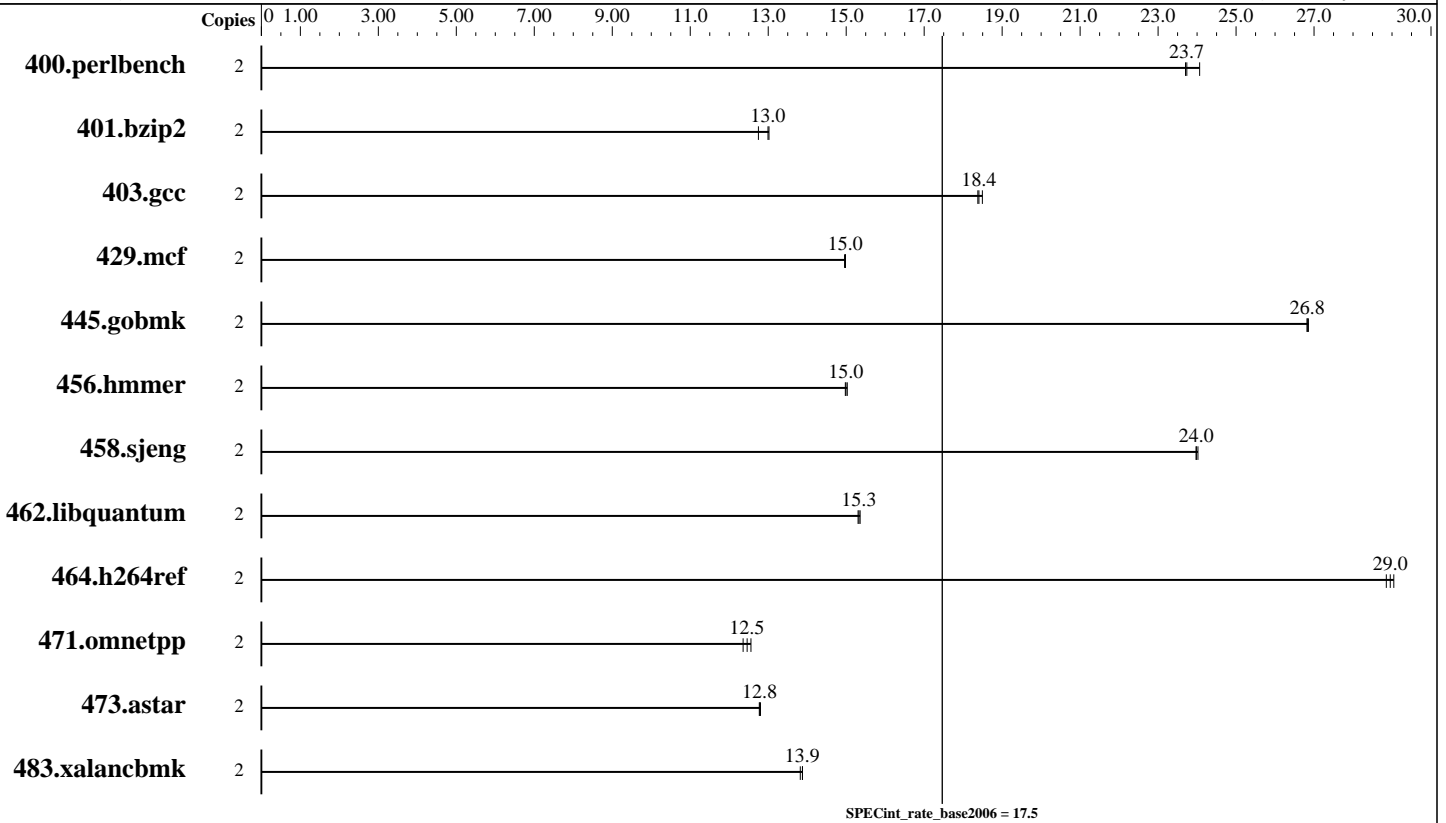

Hardware

CPU Name: AMD Athlon 64 FX-60
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: None
 Other Cache: None
 Memory: 2 GB (2 x 1 GB DDR400 CL3)
 Disk Subsystem: SATA 250GB
 Other Hardware: None

Software

Operating System: SUSE Linux 10.1 (for AMD64)
 Compiler: gcc , g++ 4.1.0 (for AMD64)
 Auto Parallel: No
 File System: ext3
 System State: runlevel 5
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Shuttle

(Test Sponsor: Advanced Micro Devices)

SPECint_rate2006 = --

Shuttle SN25P (AMD Athlon 64 FX-60)

SPECint_rate_base2006 = 17.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2006

Hardware Availability: Feb-2006

Software Availability: May-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	812	24.1	<u>823</u>	<u>23.7</u>	824	23.7							
401.bzip2	2	1482	13.0	<u>1485</u>	<u>13.0</u>	1514	12.7							
403.gcc	2	876	18.4	<u>875</u>	<u>18.4</u>	871	18.5							
429.mcf	2	1219	15.0	1217	15.0	<u>1218</u>	<u>15.0</u>							
445.gobmk	2	781	26.9	<u>782</u>	<u>26.8</u>	782	26.8							
456.hmmr	2	1246	15.0	1242	15.0	<u>1244</u>	<u>15.0</u>							
458.sjeng	2	1007	24.0	1009	24.0	<u>1009</u>	<u>24.0</u>							
462.libquantum	2	2698	15.4	2708	15.3	<u>2703</u>	<u>15.3</u>							
464.h264ref	2	<u>1529</u>	<u>29.0</u>	1534	28.9	1524	29.0							
471.omnetpp	2	995	12.6	<u>1003</u>	<u>12.5</u>	1012	12.4							
473.astar	2	1097	12.8	1099	12.8	<u>1098</u>	<u>12.8</u>							
483.xalancbmk	2	994	13.9	998	13.8	<u>994</u>	<u>13.9</u>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested by AMD

The system may be built with a PCI-E Video card

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Shuttle

(Test Sponsor: Advanced Micro Devices)

SPECint_rate2006 = --

Shuttle SN25P (AMD Athlon 64 FX-60)

SPECint_rate_base2006 = 17.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2006

Hardware Availability: Feb-2006

Software Availability: May-2006

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-O3 -funroll-loops -fno-inline-functions
C++ benchmarks:
-O3 -funroll-loops

Base Other Flags

C benchmarks:
-m32
C++ benchmarks:
-m32

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.04.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.04.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v91.
Report generated on Tue Jul 22 09:58:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 August 2006.