



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320, 1.86 GHz

SPECint®_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

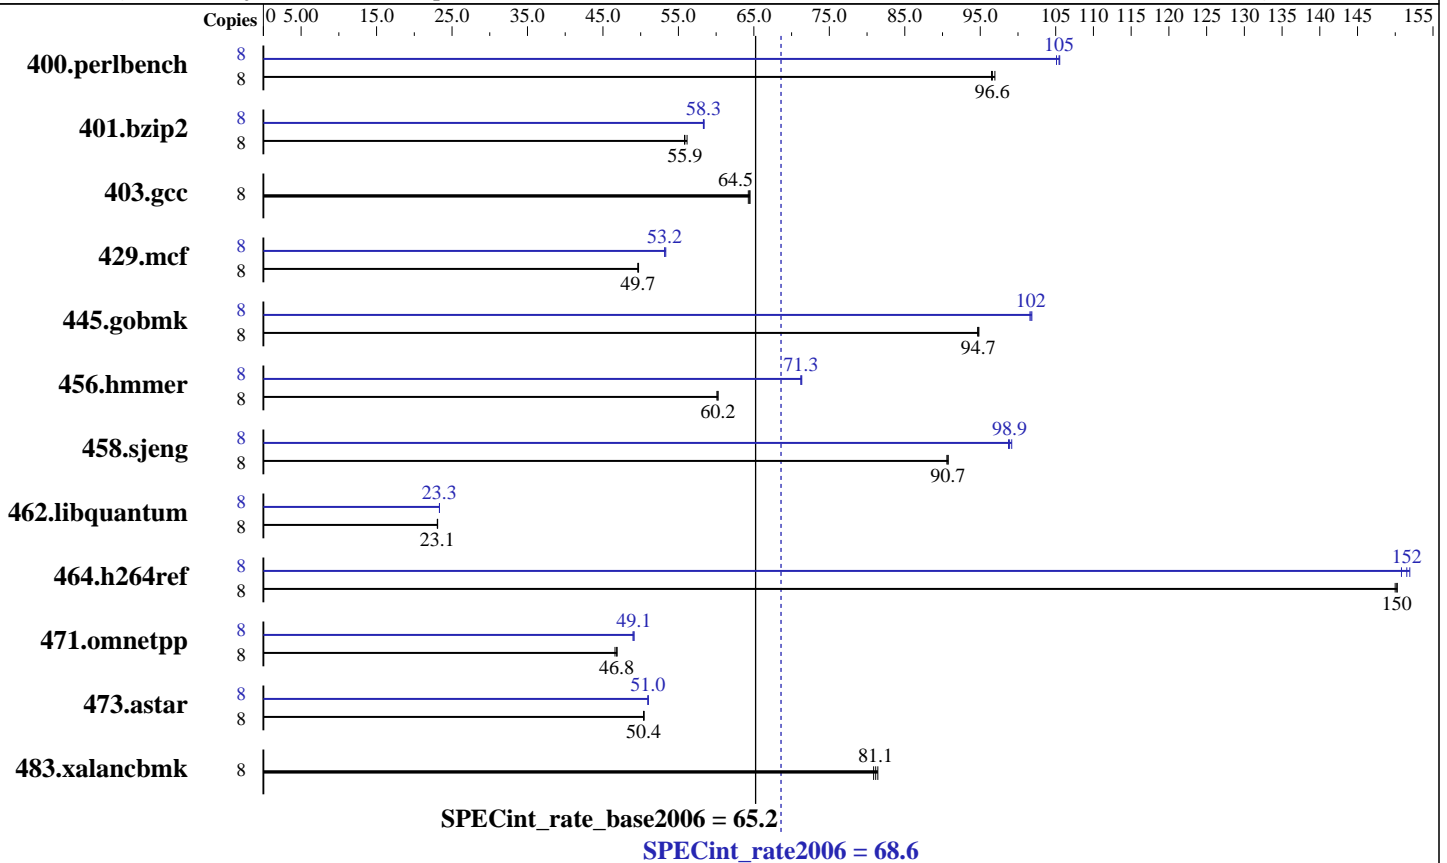

Hardware

CPU Name: Intel Xeon E5320
 CPU Characteristics: 1067 MHz system bus
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
 Disk Subsystem: SAS (73GB 15400 rpm)
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
 Auto Parallel: No
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Smart Heap Library, Version 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	806	96.9	810	96.5	809	96.6	8	744	105	741	105	741	106
401.bzip2	8	1375	56.1	1383	55.8	1382	55.9	8	1322	58.4	1323	58.3	1324	58.3
403.gcc	8	999	64.5	999	64.5	1002	64.3	8	999	64.5	999	64.5	1002	64.3
429.mcf	8	1469	49.7	1470	49.6	1467	49.7	8	1368	53.3	1372	53.2	1372	53.2
445.gobmk	8	885	94.8	887	94.7	886	94.7	8	826	102	824	102	825	102
456.hmmmer	8	1239	60.2	1242	60.1	1239	60.2	8	1047	71.3	1046	71.4	1048	71.2
458.sjeng	8	1067	90.7	1067	90.7	1069	90.6	8	979	98.9	980	98.7	976	99.2
462.libquantum	8	7177	23.1	7188	23.1	7187	23.1	8	7104	23.3	7103	23.3	7103	23.3
464.h264ref	8	1180	150	1179	150	1178	150	8	1168	152	1174	151	1165	152
471.omnetpp	8	1067	46.9	1068	46.8	1073	46.6	8	1018	49.1	1018	49.1	1021	49.0
473.astar	8	1114	50.4	1115	50.4	1113	50.5	8	1101	51.0	1101	51.0	1102	51.0
483.xalancbmk	8	678	81.4	680	81.1	683	80.9	8	678	81.4	680	81.1	683	80.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 1067 MHz

All binaries were built with 32-bit Intel compiler except:
401.bzip2, 456.hmmmer and 462.libquantum in peak were built with
64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

This result was measured on the PRIMERGY RX300 S3. The PRIMERGY RX300 S3 and
the PRIMERGY TX300 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

456.hmmer: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

Peak Portability Flags (Continued)

456.hmmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof_gen(pass 1) -prof_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmarheap

445.gobmk: Same as 429.mcf

456.hmmmer: Same as 400.perlbench

458.sjeng: Same as 429.mcf

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 429.mcf

C++ benchmarks:

471.omnetpp: -prof_gen(pass 1) -prof_use(pass 2) -xP -O3 -ipo
-no-prec-div -L/opt/SmartHeap_8_1/lib -lsmarheap

473.astar: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmarheap

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:16:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.