



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Pentium D processor 925,
3.0 GHz

SPECint®_rate2006 = 19.5

SPECint_rate_base2006 = 18.7

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

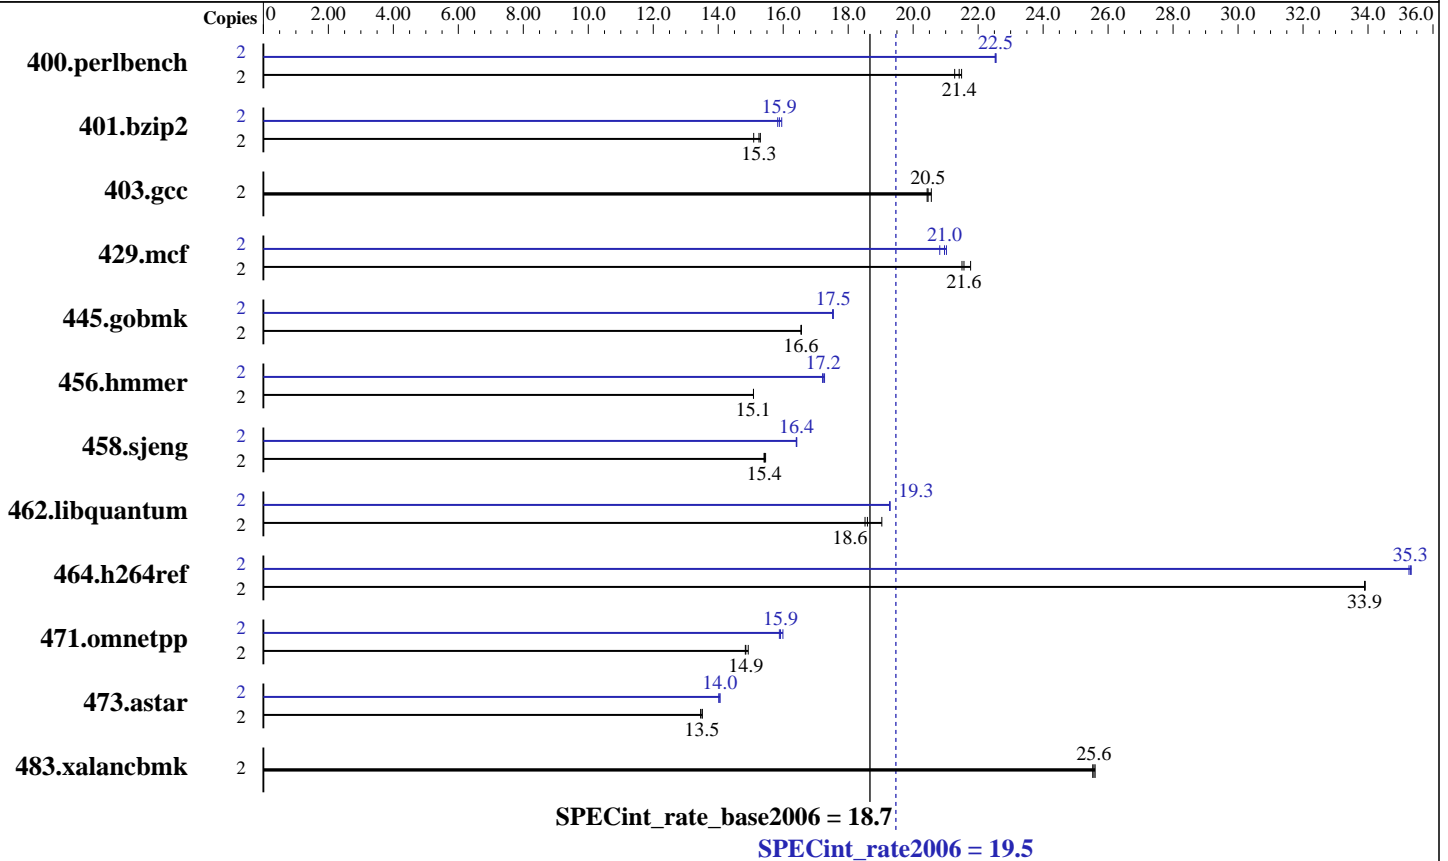

Hardware

CPU Name: Intel Pentium D 925
 CPU Characteristics: 800 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per core
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB DDR2 PC2-4200E, 2 rank, CAS 4-4-4, with ECC)
 Disk Subsystem: SATA(160GB 7200 rpm)
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
 Auto Parallel: No
 File System: ReiserFS
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Smart Heap Library, Version 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Pentium D processor 925,
3.0 GHz

SPECint_rate2006 = 19.5

SPECint_rate_base2006 = 18.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	909	21.5	<u>912</u>	<u>21.4</u>	918	21.3	2	868	22.5	867	22.5	<u>867</u>	<u>22.5</u>
401.bzip2	2	1262	15.3	<u>1265</u>	<u>15.3</u>	1279	15.1	2	1210	16.0	1219	15.8	<u>1215</u>	<u>15.9</u>
403.gcc	2	783	20.6	788	20.4	<u>787</u>	<u>20.5</u>	2	783	20.6	788	20.4	<u>787</u>	<u>20.5</u>
429.mcf	2	<u>846</u>	<u>21.6</u>	848	21.5	838	21.8	2	876	20.8	<u>870</u>	<u>21.0</u>	868	21.0
445.gobmk	2	1267	16.6	<u>1267</u>	<u>16.6</u>	1268	16.6	2	1197	17.5	1196	17.5	<u>1196</u>	<u>17.5</u>
456.hmmer	2	<u>1237</u>	<u>15.1</u>	1237	15.1	1237	15.1	2	1080	17.3	<u>1083</u>	<u>17.2</u>	1084	17.2
458.sjeng	2	1566	15.5	1570	15.4	<u>1569</u>	<u>15.4</u>	2	1475	16.4	<u>1475</u>	<u>16.4</u>	1474	16.4
462.libquantum	2	2238	18.5	2177	19.0	<u>2229</u>	<u>18.6</u>	2	<u>2149</u>	<u>19.3</u>	2149	19.3	2150	19.3
464.h264ref	2	1305	33.9	<u>1306</u>	<u>33.9</u>	1306	33.9	2	1253	35.3	<u>1254</u>	<u>35.3</u>	1255	35.3
471.omnetpp	2	843	14.8	838	14.9	<u>842</u>	<u>14.9</u>	2	787	15.9	782	16.0	<u>785</u>	<u>15.9</u>
473.astar	2	1039	13.5	1043	13.5	<u>1040</u>	<u>13.5</u>	2	1002	14.0	<u>999</u>	<u>14.0</u>	999	14.1
483.xalancbmk	2	539	25.6	<u>540</u>	<u>25.6</u>	541	25.5	2	539	25.6	<u>540</u>	<u>25.6</u>	541	25.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 800 MHz

All binaries were built with 32-bit Intel compiler except:
401.bzip2, 456.hmmer and 462.libquantum in peak were built with
64-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Pentium D processor 925,
3.0 GHz

SPECint_rate2006 = 19.5

SPECint_rate_base2006 = 18.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

456.hmmer: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Pentium D processor 925,
3.0 GHz

SPECint_rate2006 = 19.5

SPECint_rate_base2006 = 18.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof_gen(pass 1) -prof_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmartheap

445.gobmk: Same as 429.mcf

456.hmmr: Same as 400.perlbench

458.sjeng: Same as 429.mcf

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 429.mcf

C++ benchmarks:

471.omnetpp: -prof_gen(pass 1) -prof_use(pass 2) -xP -O3 -ipo
-no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

473.astar: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmartheap

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:18:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 June 2007.