



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX200 S3, Intel Xeon processor E5320, 1.86 GHz

SPECint®_rate2006 = 68.9

SPECint_rate_base2006 = 63.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

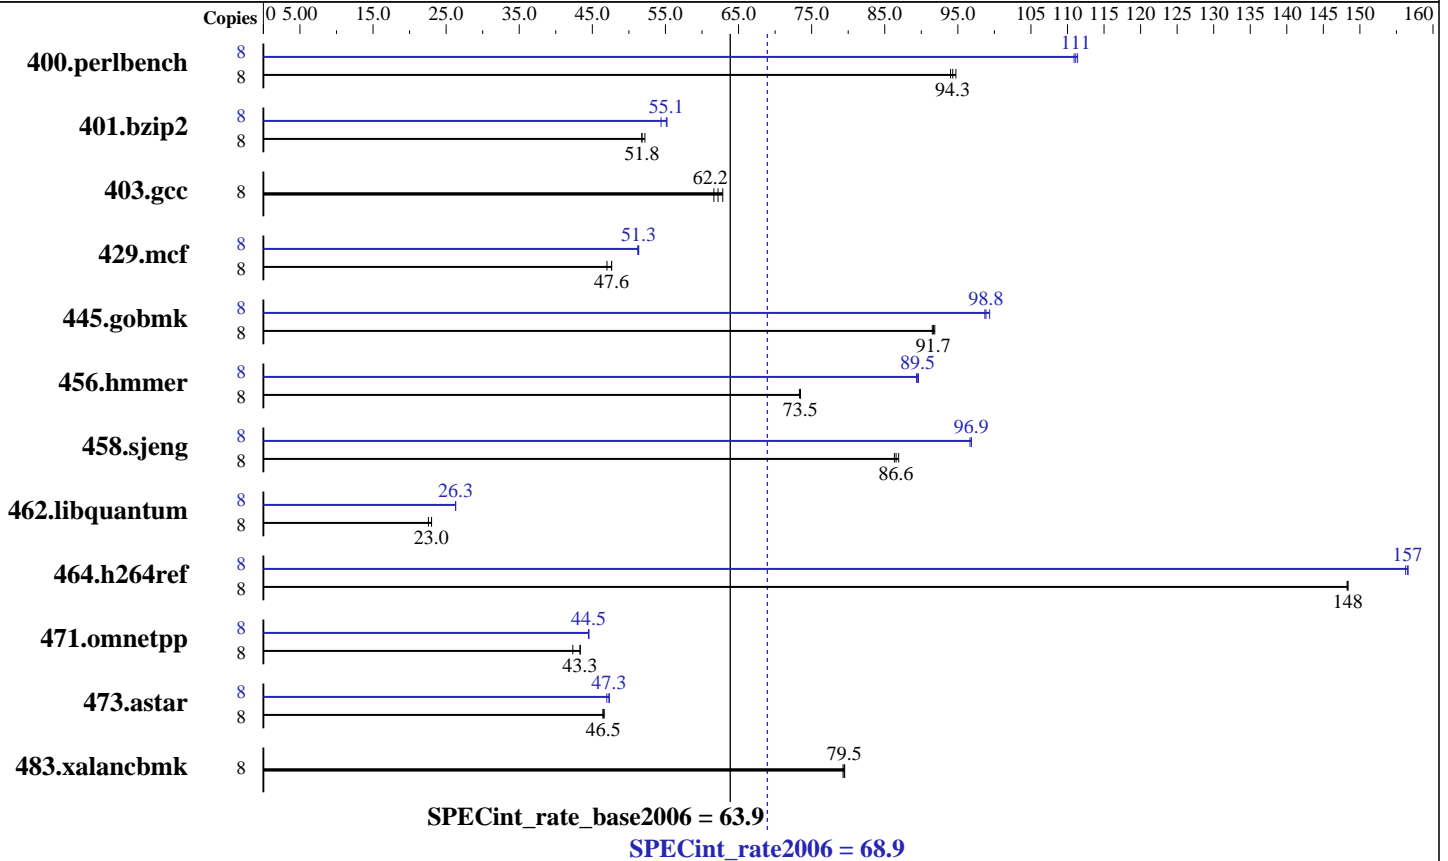

Hardware

CPU Name: Intel Xeon E5320
 CPU Characteristics: 1067 MHz system bus
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
 Disk Subsystem: Seagate ST336754SS (SAS, 36GB, 15000rpm)
 Other Hardware: None

Software

Operating System: SUSE LINUX Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smpp
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070308, Package-ID: I_cc_p_10.0.023
 Auto Parallel: No
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Smart Heap Library, Version 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX200 S3, Intel Xeon processor E5320, 1.86 GHz

SPECint_rate2006 = 68.9

SPECint_rate_base2006 = 63.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	825	94.7	829	94.3	831	94.0	8	703	111	702	111	705	111
401.bzip2	8	1491	51.8	1479	52.2	1491	51.8	8	1419	54.4	1401	55.1	1398	55.2
403.gcc	8	1045	61.6	1035	62.2	1025	62.8	8	1045	61.6	1035	62.2	1025	62.8
429.mcf	8	1552	47.0	1532	47.6	1531	47.6	8	1422	51.3	1421	51.3	1425	51.2
445.gobmk	8	917	91.5	914	91.8	915	91.7	8	850	98.7	845	99.3	849	98.8
456.hmmmer	8	1016	73.5	1016	73.5	1018	73.3	8	834	89.5	833	89.6	835	89.3
458.sjeng	8	1121	86.3	1114	86.9	1118	86.6	8	999	96.9	1001	96.7	999	96.9
462.libquantum	8	7342	22.6	7208	23.0	7204	23.0	8	6302	26.3	6304	26.3	6306	26.3
464.h264ref	8	1193	148	1194	148	1193	148	8	1131	157	1133	156	1131	157
471.omnetpp	8	1181	42.3	1153	43.4	1155	43.3	8	1124	44.5	1123	44.5	1124	44.5
473.astar	8	1209	46.5	1204	46.6	1208	46.5	8	1187	47.3	1188	47.3	1195	47.0
483.xalancbmk	8	696	79.3	694	79.5	695	79.5	8	696	79.3	694	79.5	695	79.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmmer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX200 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 68.9

SPECint_rate_base2006 = 63.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xT -O3 -ipo -no-prec-div -ansi-alias

-L/opt/SmartHeap_8_1/lib -lsmarheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-I/opt/intel/cce/10.0.023/include
-L/opt/intel/cce/10.0.023/lib

456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-I/opt/intel/cce/10.0.023/include
-L/opt/intel/cce/10.0.023/lib

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX200 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 68.9

SPECint_rate_base2006 = 63.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof_gen(pass 1) -prof_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof_gen(pass 1) -prof_use(pass 2) -fast -prefetch
-L/opt/SmartHeap_8_1/lib -lsmarheap

445.gobmk: Same as 400.perlbench

456.hmmer: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2

458.sjeng: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4

462.libquantum: -prof_gen(pass 1) -prof_use(pass 2) -fast -prefetch
-opt-streaming-stores always

464.h264ref: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof_gen(pass 1) -prof_use(pass 2) -fast -ansi-alias
-L/opt/SmartHeap_8_1/lib -lsmarheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/FSC_Intel_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/FSC_Intel_flags.xml



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX200 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 68.9

SPECint_rate_base2006 = 63.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:41:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.