



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor X5365,  
3.0 GHz

### SPECint®\_rate2006 = Not Run

### SPECint\_rate\_base2006 = 98.2

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

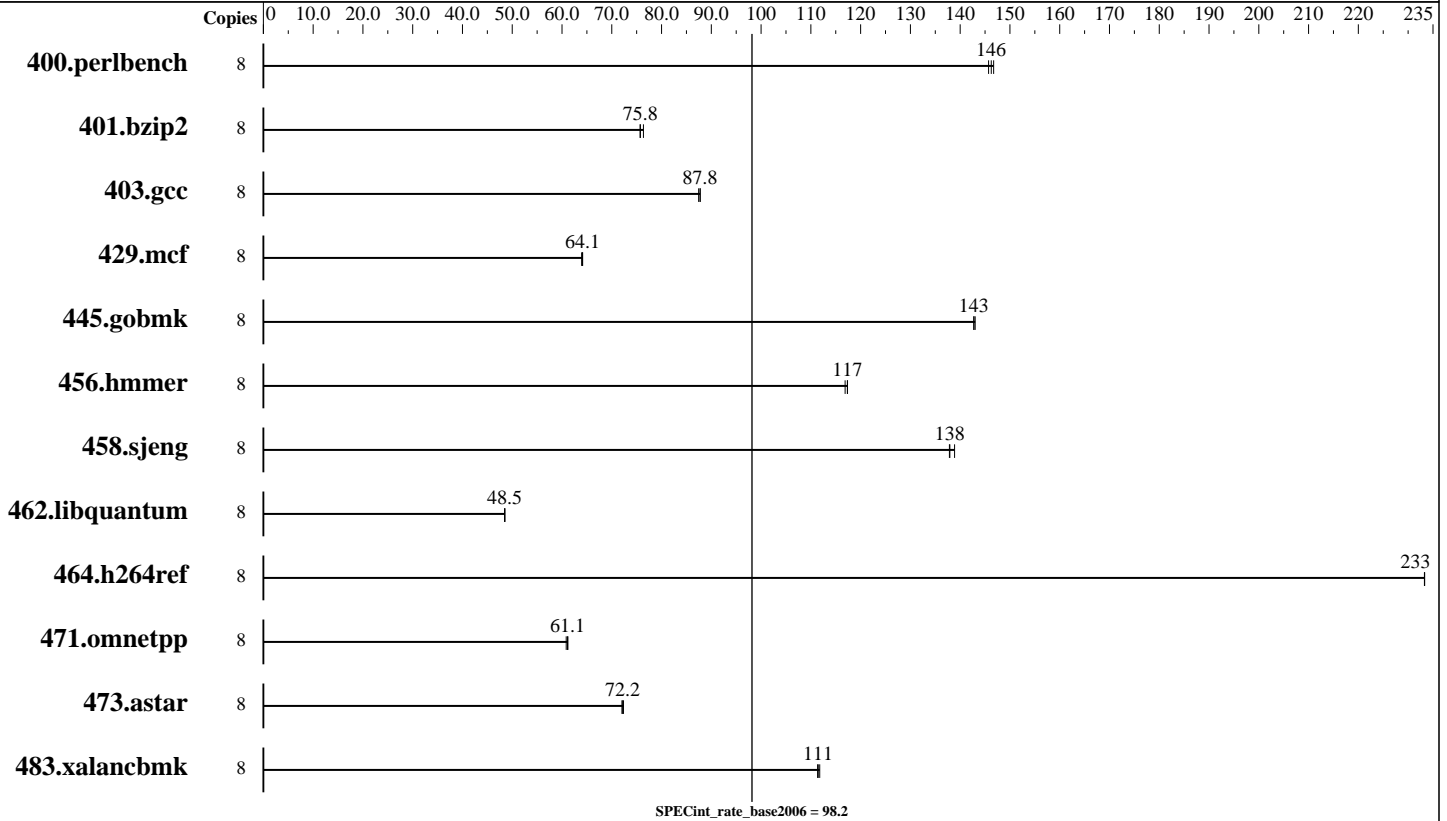

### Hardware

CPU Name: Intel Xeon X5365  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)  
 Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)  
 Other Hardware: None

### Software

Operating System: SUSE LINUX Enterprise Server 10 SP1 (x86\_64), Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725  
 Auto Parallel: No  
 File System: ext2  
 System State: Multiuser, Runlevel 3  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: Smart Heap Library, Version 8.1  
 binutils-2.17.tar.gz, Version 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon processor X5365,  
3.0 GHz

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 98.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Sep-2007

Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	533	147	536	146	<b>534</b>	<b>146</b>							
401.bzip2	8	1011	76.4	<b>1019</b>	<b>75.8</b>	1020	75.7							
403.gcc	8	734	87.8	<b>734</b>	<b>87.8</b>	736	87.4							
429.mcf	8	<b>1138</b>	<b>64.1</b>	1141	63.9	1138	64.1							
445.gobmk	8	<b>588</b>	<b>143</b>	587	143	588	143							
456.hammer	8	<b>636</b>	<b>117</b>	639	117	636	117							
458.sjeng	8	697	139	<b>702</b>	<b>138</b>	702	138							
462.libquantum	8	<b>3418</b>	<b>48.5</b>	3418	48.5	3418	48.5							
464.h264ref	8	759	233	759	233	<b>759</b>	<b>233</b>							
471.omnetpp	8	817	61.2	<b>818</b>	<b>61.1</b>	822	60.8							
473.astar	8	780	72.0	<b>778</b>	<b>72.2</b>	776	72.3							
483.xalancbmk	8	494	112	496	111	<b>495</b>	<b>111</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:

<http://www.fujitsu-siemens.com>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY BX620 S4, Intel Xeon processor X5365,  
3.0 GHz

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 98.2**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Oct-2007

**Hardware Availability:** Sep-2007

**Software Availability:** Nov-2007

## Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 14:39:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 November 2007.