



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

### SPECint®\_rate2006 = Not Run

### PRIMERGY TX200 S4, Intel Xeon E5405, 2.0 GHz

### SPECint\_rate\_base2006 = 77.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

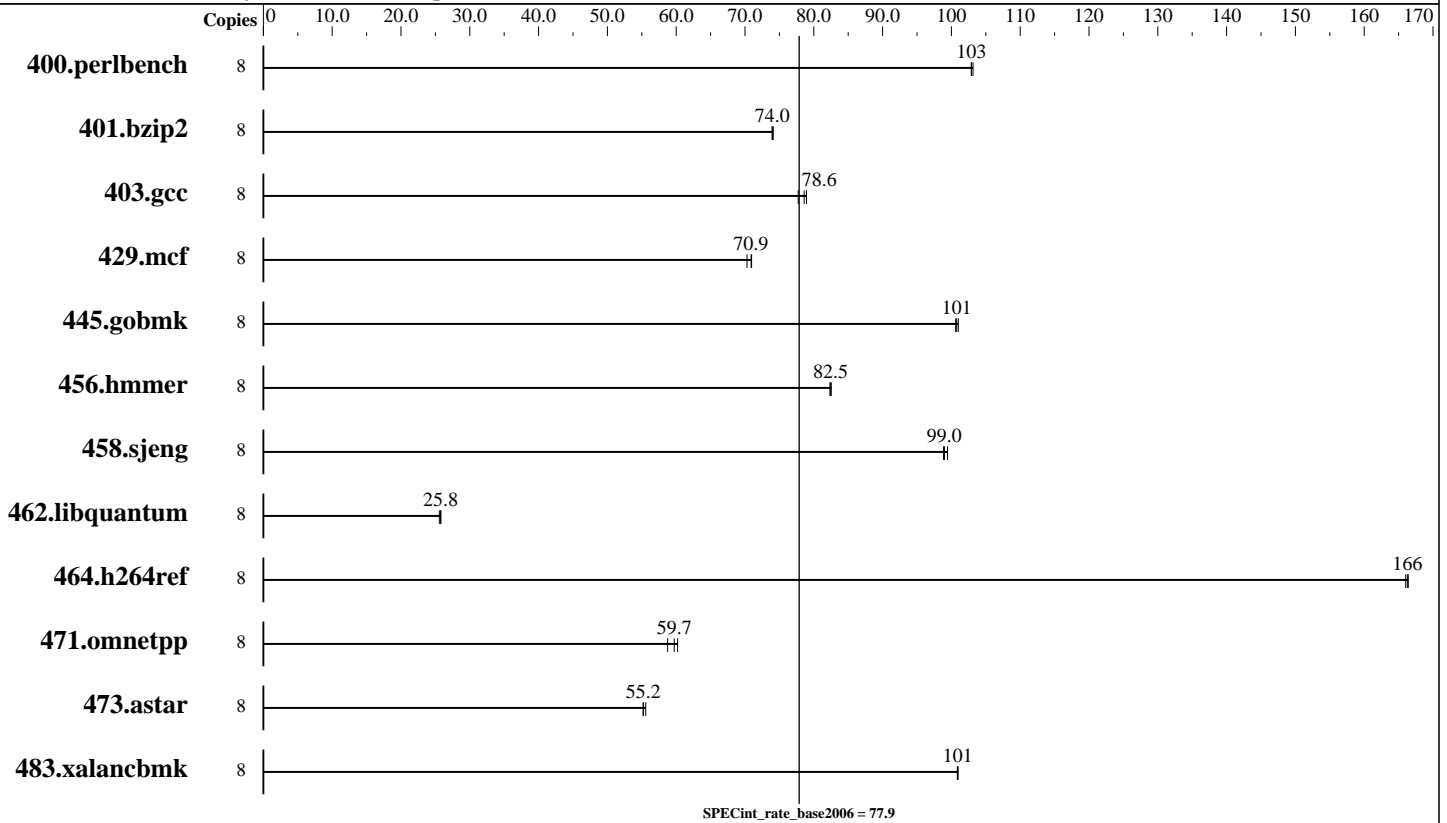

### Hardware

CPU Name: Intel Xeon E5405  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (4x4 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)  
 Disk Subsystem: Fujitsu MAX3036RC (SAS, 36GB, 10000rpm)  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725  
 Auto Parallel: No  
 File System: ext2  
 System State: Multiuser, Runlevel 3  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: MicroQuill SmartHeap Library, Version 8.1  
 binutils-2.17.tar.gz, Version 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECint\_rate2006 = Not Run

PRIMERGY TX200 S4, Intel Xeon E5405, 2.0 GHz

SPECint\_rate\_base2006 = 77.9

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	758	103	<u>759</u>	<u>103</u>	760	103							
401.bzip2	8	<u>1044</u>	<u>74.0</u>	1044	74.0	1042	74.1							
403.gcc	8	828	77.7	816	78.9	<u>819</u>	<u>78.6</u>							
429.mcf	8	1038	70.3	<u>1029</u>	<u>70.9</u>	1028	71.0							
445.gobmk	8	831	101	<u>833</u>	<u>101</u>	834	101							
456.hammer	8	907	82.3	904	82.5	<u>905</u>	<u>82.5</u>							
458.sjeng	8	979	98.9	973	99.4	<u>978</u>	<u>99.0</u>							
462.libquantum	8	6481	25.6	<u>6435</u>	<u>25.8</u>	6425	25.8							
464.h264ref	8	1066	166	1064	166	<u>1065</u>	<u>166</u>							
471.omnetpp	8	851	58.8	<u>837</u>	<u>59.7</u>	830	60.2							
473.astar	8	1018	55.2	1011	55.6	<u>1017</u>	<u>55.2</u>							
483.xalancbmk	8	547	101	547	101	<u>547</u>	<u>101</u>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:

<http://www.fujitsu-siemens.com>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECint\_rate2006 = Not Run**

**PRIMERGY TX200 S4, Intel Xeon E5405, 2.0 GHz**

**SPECint\_rate\_base2006 = 77.9**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Oct-2007

**Hardware Availability:** Dec-2007

**Software Availability:** Nov-2007

## Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 16:21:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 February 2008.