



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 93.0

IBM System x3655 (AMD Opteron 2352)

SPECint_rate_base2006 = 80.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

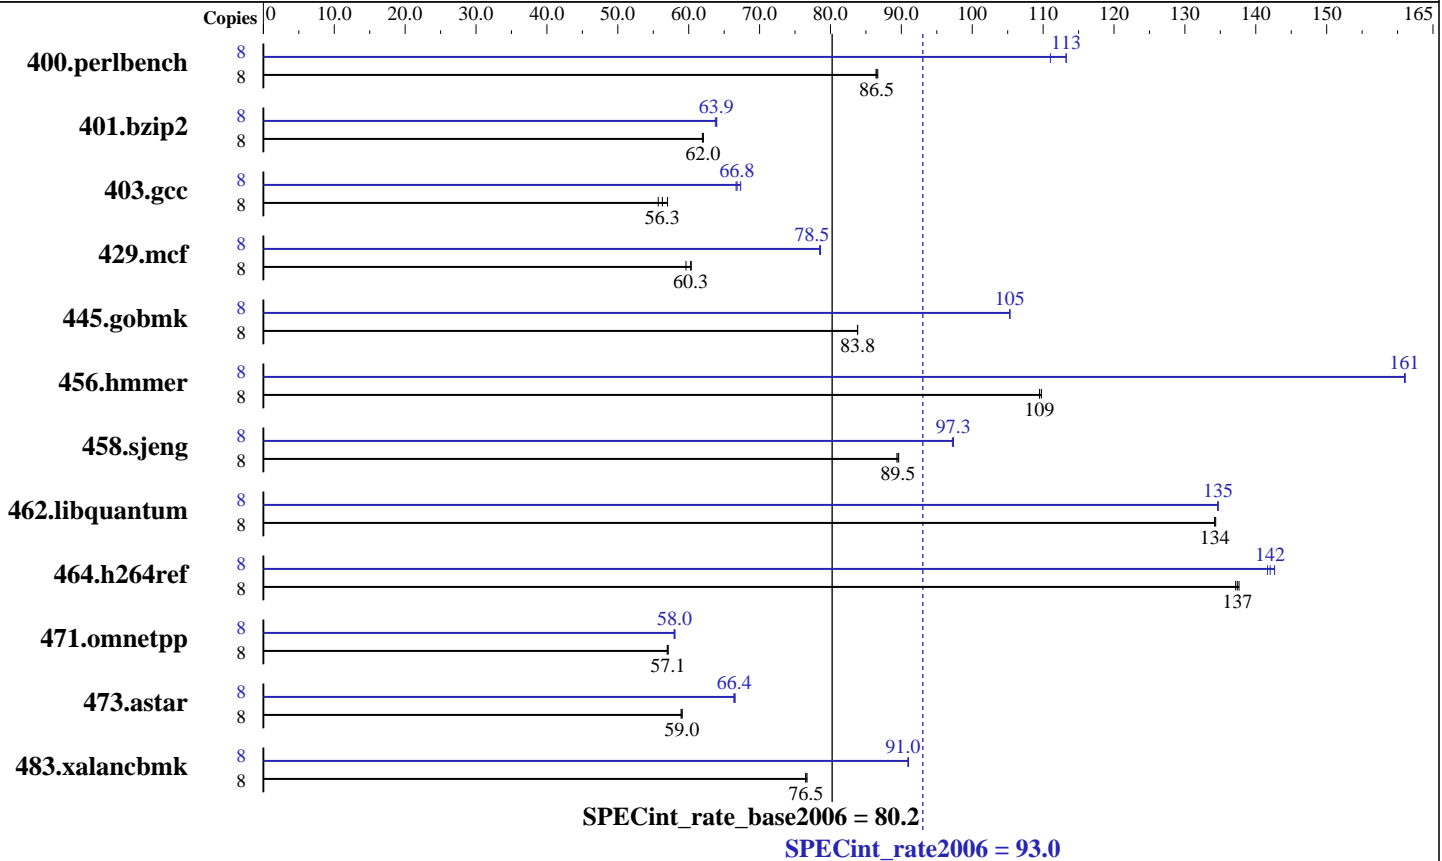

Hardware

CPU Name: AMD Opteron 2352
 CPU Characteristics:
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (8 x 2 GB, DDR2-667 CL5 Reg Dual Rank)
 Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ext3
 System State: Runlevel 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 93.0

IBM System x3655 (AMD Opteron 2352)

SPECint_rate_base2006 = 80.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	902	86.7	904	86.4	903	86.5	8	704	111	690	113	690	113
401.bzip2	8	1244	62.1	1245	62.0	1247	61.9	8	1211	63.8	1208	63.9	1207	64.0
403.gcc	8	1156	55.7	1144	56.3	1130	57.0	8	966	66.7	956	67.3	964	66.8
429.mcf	8	1224	59.6	1210	60.3	1209	60.4	8	929	78.5	930	78.5	928	78.6
445.gobmk	8	1001	83.8	1001	83.8	1001	83.8	8	797	105	797	105	797	105
456.hmmer	8	682	109	680	110	682	109	8	464	161	464	161	463	161
458.sjeng	8	1081	89.5	1083	89.4	1080	89.6	8	996	97.2	994	97.4	995	97.3
462.libquantum	8	1234	134	1235	134	1235	134	8	1231	135	1231	135	1231	135
464.h264ref	8	1291	137	1288	137	1286	138	8	1241	143	1250	142	1246	142
471.omnetpp	8	876	57.1	878	57.0	876	57.1	8	861	58.0	863	57.9	862	58.0
473.astar	8	953	58.9	951	59.0	951	59.1	8	845	66.4	844	66.6	846	66.4
483.xalancbmk	8	722	76.5	720	76.7	721	76.5	8	607	91.0	607	90.9	607	91.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 93.0

IBM System x3655 (AMD Opteron 2352)

SPECint_rate_base2006 = 80.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

464.h264ref: pathcc

C++ benchmarks (except as noted below):

pathCC

473.astar: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 93.0

IBM System x3655 (AMD Opteron 2352)

SPECint_rate_base2006 = 80.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -fastsse -O4
 -Msmartalloc=huge:150 -Mprefetch=t0 -Mnounroll
 -tp barcelona-64 -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:Ofast -m32

429.mcf: -fastsse -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline:1
 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge:150
 -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
 -Mipa=arg -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -fastsse
 -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
 -Bstatic_pgi

462.libquantum: -fastsse -Munroll=m:8 -Msmartalloc=huge:150
 -Mprefetch=distance:4 -Mfprelaxed -Mipa=fast -Mipa=inline
 -Mipa=noarg -tp barcelona-64 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 93.0

IBM System x3655 (AMD Opteron 2352)

SPECint_rate_base2006 = 80.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32 -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge:150
-Msafeptr=global -Mfprelaxed --zc_eh -tp barcelona
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -m32
-lsmarheap

Peak Other Flags

C benchmarks:

429.mcf: -Mipa=jobs:4

456.hmmer: -Mipa=jobs:4

458.sjeng: -Mipa=jobs:4(pass 2)

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):

-L/root/work/cpu2006-amd421gh/amd421gh.libs/32

473.astar: -Mipa=jobs:4(pass 2)

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 93.0

IBM System x3655 (AMD Opteron 2352)

SPECint_rate_base2006 = 80.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:48:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2008.