



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint<sup>®</sup>\_rate2006 = 71.4

Express5800/110Ri-1  
(Intel Xeon X3350)

SPECint\_rate\_base2006 = 60.3

CPU2006 license: 9006


Test date: Jul-2008

Test sponsor: NEC Corporation

Hardware Availability: Apr-2008

Tested by: NEC Corporation

Software Availability: Nov-2007

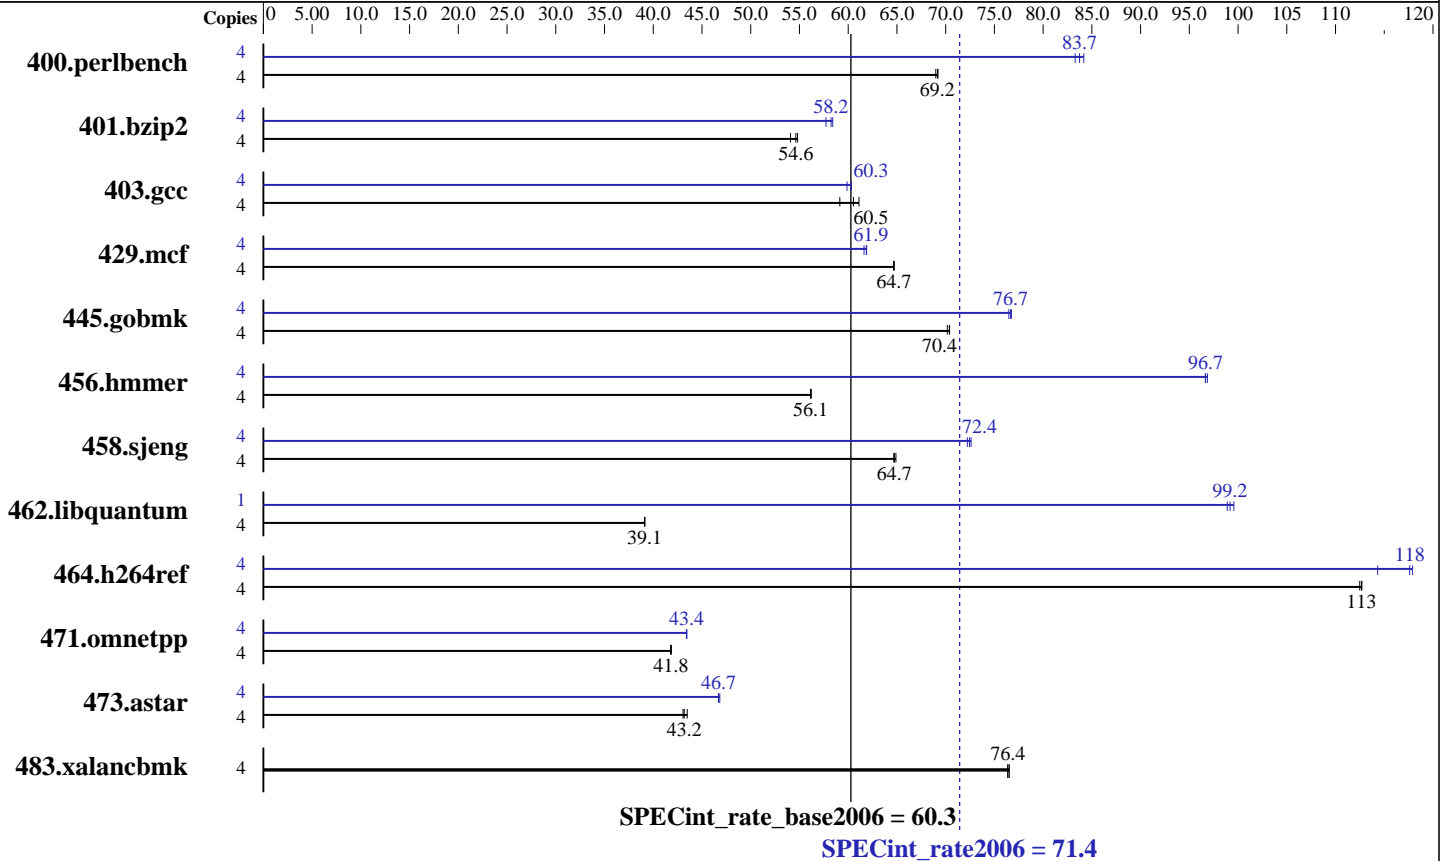

**Hardware**

CPU Name: Intel Xeon X3350  
 CPU Characteristics: 2.66 GHz, 2x6 MB L2 shared, 1333 MHz bus  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)  
 Disk Subsystem: 1x80.0 GB SATAII, 7200RPM  
 Other Hardware: None

**Software**

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: L\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/110Ri-1  
(Intel Xeon X3350)

SPECint\_rate2006 = 71.4

SPECint\_rate\_base2006 = 60.3

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Jul-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	566	69.0	<u>565</u>	<u>69.2</u>	565	69.2	4	469	83.3	<u>467</u>	<u>83.7</u>	464	84.2
401.bzip2	4	714	54.1	704	54.8	<u>707</u>	<u>54.6</u>	4	669	57.7	<u>663</u>	<u>58.2</u>	661	58.4
403.gcc	4	<u>532</u>	<u>60.5</u>	544	59.1	527	61.1	4	538	59.9	<u>534</u>	<u>60.3</u>	534	60.3
429.mcf	4	564	64.7	564	64.7	<u>564</u>	<u>64.7</u>	4	<u>590</u>	<u>61.9</u>	589	61.9	592	61.6
445.gobmk	4	<u>596</u>	<u>70.4</u>	598	70.2	596	70.4	4	547	76.7	<u>547</u>	<u>76.7</u>	549	76.5
456.hmmer	4	664	56.2	<u>665</u>	<u>56.1</u>	665	56.1	4	385	96.9	<u>386</u>	<u>96.7</u>	386	96.6
458.sjeng	4	748	64.7	<u>748</u>	<u>64.7</u>	746	64.9	4	667	72.6	670	72.2	<u>668</u>	<u>72.4</u>
462.libquantum	4	2119	39.1	2118	39.1	<u>2119</u>	<u>39.1</u>	1	<u>209</u>	<u>99.2</u>	210	98.9	208	99.6
464.h264ref	4	787	112	<u>786</u>	<u>113</u>	785	113	4	774	114	751	118	<u>753</u>	<u>118</u>
471.omnetpp	4	597	41.9	598	41.8	<u>598</u>	<u>41.8</u>	4	<u>576</u>	<u>43.4</u>	575	43.4	576	43.4
473.astar	4	652	43.1	646	43.5	<u>650</u>	<u>43.2</u>	4	<u>601</u>	<u>46.7</u>	600	46.8	601	46.7
483.xalancbmk	4	361	76.5	361	76.4	<u>361</u>	<u>76.4</u>	4	361	76.5	361	76.4	<u>361</u>	<u>76.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores

## Platform Notes

Bios settings:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Disabled

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2,  
456.hmmer, for peak, are compiled in 64-bit mode

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/110Ri-1  
(Intel Xeon X3350)

**SPECint\_rate2006 = 71.4**

**SPECint\_rate\_base2006 = 60.3**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

456.hmmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint\_rate2006 = 71.4**

Express5800/110Ri-1  
(Intel Xeon X3350)

**SPECint\_rate\_base2006 = 60.3**

**CPU2006 license:** 9006

**Test date:** Jul-2008

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2008

**Tested by:** NEC Corporation

**Software Availability:** Nov-2007

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/110Ri-1  
(Intel Xeon X3350)

**SPECint\_rate2006 = 71.4**

**SPECint\_rate\_base2006 = 60.3**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Jul-2008  
**Hardware Availability:** Apr-2008  
**Software Availability:** Nov-2007

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 20:03:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 July 2008.