



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint®_rate2006 = 2290

Sun SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 6


Test date: Jun-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

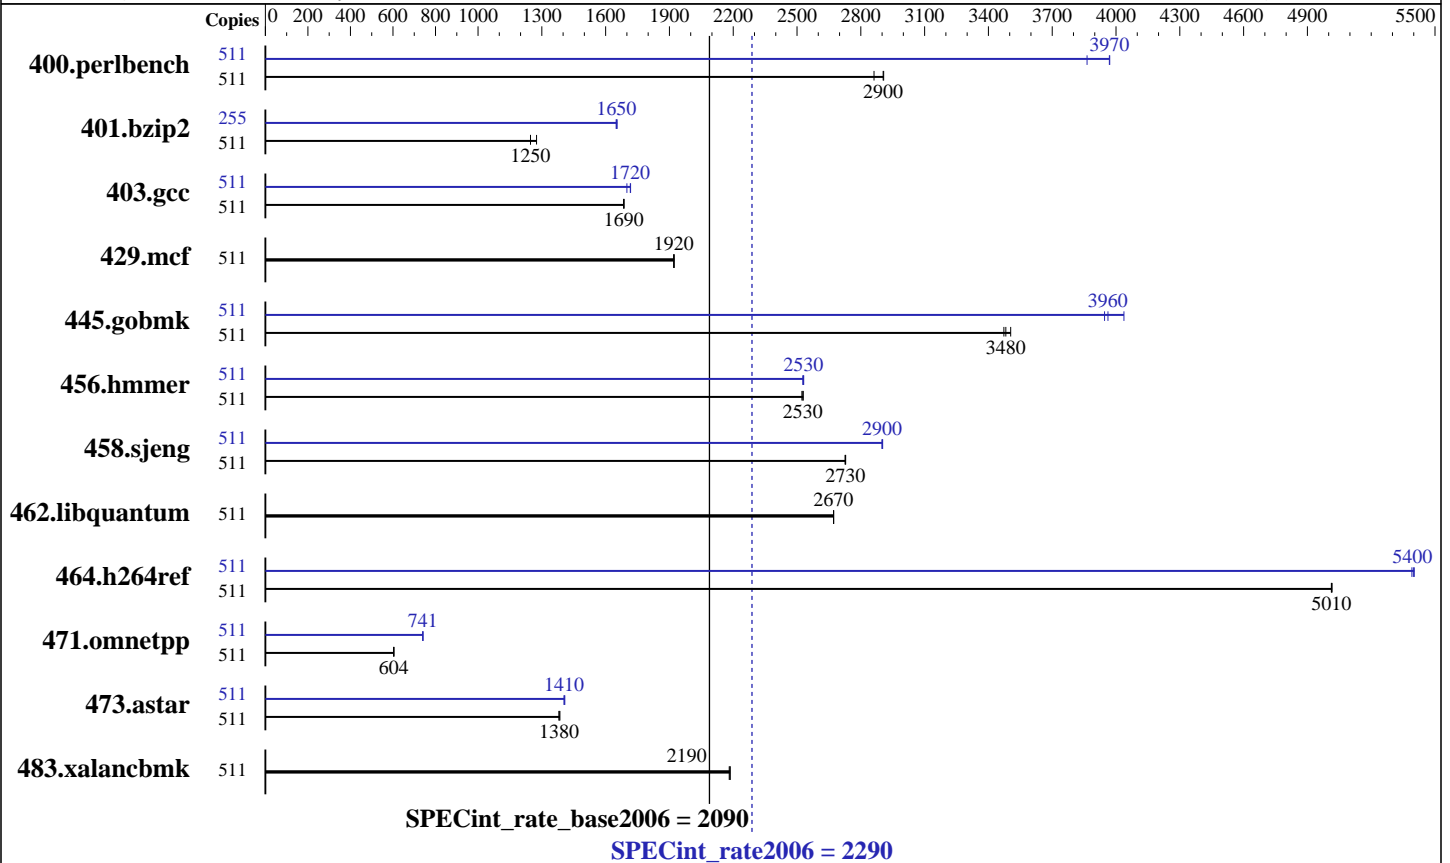

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz: 2520
 FPU: Integrated
 CPU(s) enabled: 256 cores, 64 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 16 CMUs; each CMU contains 2 or 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 1 TB (512 x 2 GB)
 Disk Subsystem: 12 TB RAID 0 Solaris Volume
 24 x 500 GB 15000 RPM disk
 Stripe interlace size 128Kbytes
 Other Hardware: None

Software

Operating System: Solaris 10 5/08 with Patch 137111-03
 Compiler: Sun Studio 12 with patches
 124867-06, 124861-07, 124863-05
 (see patch information below)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 2290

Sun SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	511	1744	2860	1717	2910	<u>1719</u>	<u>2900</u>	511	1292	3860	1257	3970	<u>1258</u>	<u>3970</u>
401.bzip2	511	3867	1280	<u>3955</u>	<u>1250</u>	3956	1250	255	<u>1491</u>	<u>1650</u>	1488	1650	1492	1650
403.gcc	511	2442	1680	<u>2440</u>	<u>1690</u>	2439	1690	511	2420	1700	<u>2397</u>	<u>1720</u>	2395	1720
429.mcf	511	2424	1920	<u>2426</u>	<u>1920</u>	2427	1920	511	2424	1920	<u>2426</u>	<u>1920</u>	2427	1920
445.gobmk	511	1529	3500	1544	3470	<u>1540</u>	<u>3480</u>	511	<u>1353</u>	<u>3960</u>	1358	3950	1328	4040
456.hammer	511	<u>1886</u>	<u>2530</u>	1890	2520	1885	2530	511	1887	2530	1883	2530	<u>1884</u>	<u>2530</u>
458.sjeng	511	<u>2267</u>	<u>2730</u>	2266	2730	2268	2730	511	<u>2131</u>	<u>2900</u>	2132	2900	2130	2900
462.libquantum	511	3962	2670	3963	2670	<u>3963</u>	<u>2670</u>	511	3962	2670	3963	2670	<u>3963</u>	<u>2670</u>
464.h264ref	511	2254	5020	2256	5010	<u>2255</u>	<u>5010</u>	511	<u>2095</u>	<u>5400</u>	2093	5400	2098	5390
471.omnetpp	511	5285	604	5296	603	<u>5287</u>	<u>604</u>	511	4315	740	<u>4312</u>	<u>741</u>	4312	741
473.astar	511	2590	1380	<u>2597</u>	<u>1380</u>	2598	1380	511	<u>2552</u>	<u>1410</u>	2548	1410	2554	1400
483.xalancbmk	511	1614	2190	<u>1614</u>	<u>2190</u>	1617	2180	511	1614	2190	<u>1614</u>	<u>2190</u>	1617	2180

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Environment Variable Settings:

```
export LD_PRELOAD=mpss.so.1:madv.so.1
export MPSSHEAP=4MB
export MPSSSTACK=4MB
  Requests system to use 4 MB pages when possible.
export MADV access_lwp
  access_lwp requests that the next light weight process to touch
  the specified address range will access it most heavily.
ulimit -s 131072 was used to limit the space consumed
  by the stack (making more space available for the heap)
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 2290

Sun SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

Operating System Notes (Continued)

System Tunables (/etc/system parameters):

autoup=200

Causes pages older than the listed number of seconds to be written by fsflush.

lpg_alloc_prefer=1

Set lgroup page allocation to strongly prefer local pages

Other System Settings:

The webconsole service was turned off using
svcadm disable webconsole

The SPEC toolset was bound to processors 1-511 using processor sets:
psrset -c 1-511
psrset -e 1 ksh

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M9000 Server.
Note that the Sun SPARC Enterprise M9000 and Fujitsu SPARC Enterprise M9000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 2290

Sun SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

Base Optimization Flags

C benchmarks:

-fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch_level=1
-xalias_level=std -l12amm

C++ benchmarks:

-library=stlport4 -fast -xipo=2 -xpagesize=4M -fma=fused
-xprefetch_level=2 -xalias_level=compatible -l12amm -lfast

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=std -xrestrict
-xprefetch=no -lfast -l12amm

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=strong
-xprefetch=latx:5 -l12amm

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=std -l12amm

429.mcf: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 2290

Sun SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 6

Test date: Jun-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Peak Optimization Flags (Continued)

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=std -xrestrict
-l12amm

456.hmmr: Same as 403.gcc

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -l12amm

462.libquantum: basepeak = yes

464.h264ref: Same as 403.gcc

C++ benchmarks:

471.omnetpp: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible -l12amm

473.astar: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible
-xprefetch=latx:3 -lfast -l12amm

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:52:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.