



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 84.1

ProLiant ML310 G5
(3.0 GHz, Intel Xeon X3370)

SPECint_rate_base2006 = 78.6

CPU2006 license: 3


Test date: Sep-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

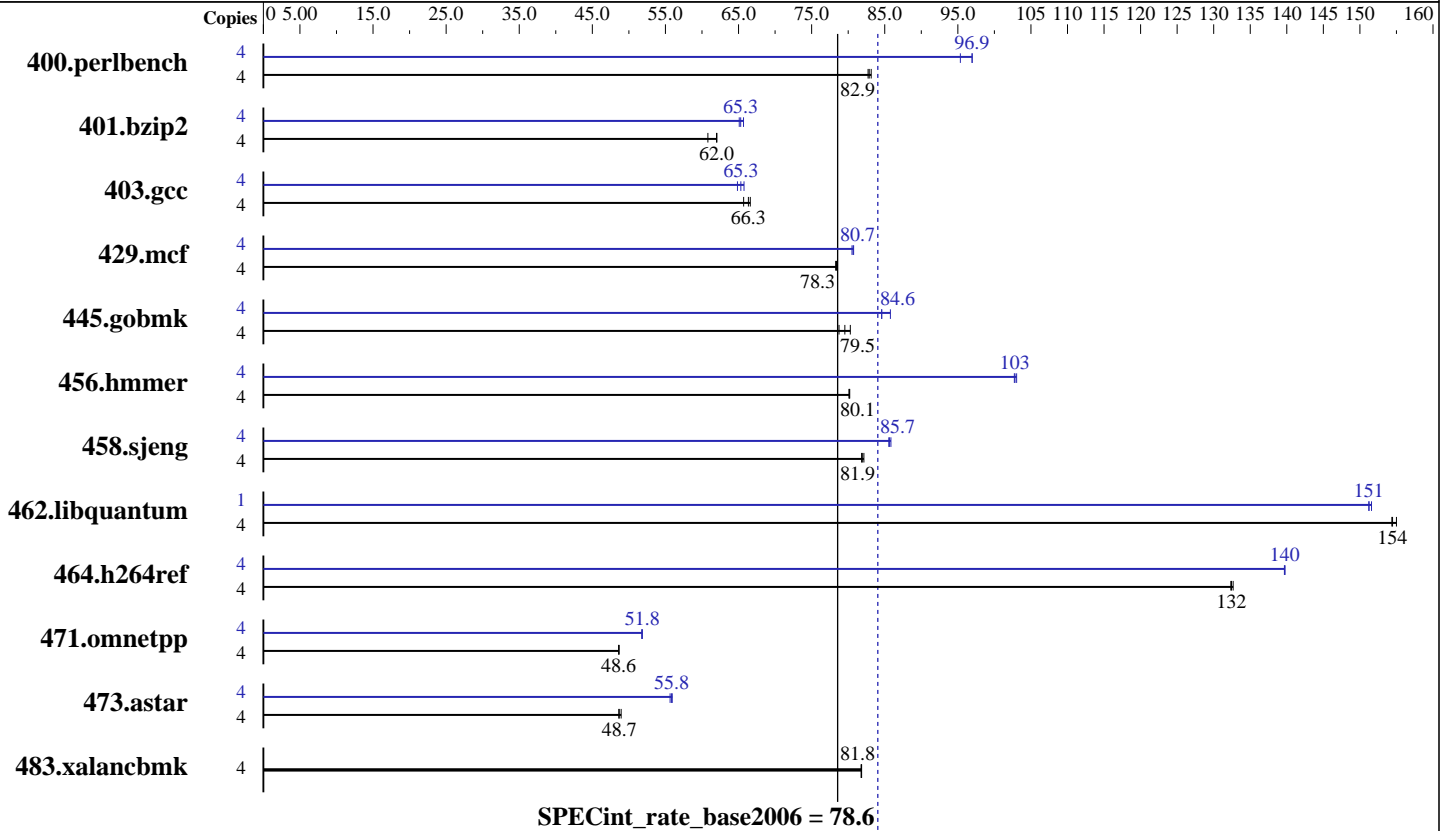

Hardware

CPU Name: Intel Xeon X3370
 CPU Characteristics: 3.0 GHz, 2 x 6 MB L2 shared, 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB(4x2 GB PC2-6400E CL6)
 Disk Subsystem: 250 GB 7.2 K SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 84.1

ProLiant ML310 G5
(3.0 GHz, Intel Xeon X3370)

SPECint_rate_base2006 = 78.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	472	82.7	472	82.9	470	83.1	4	410	95.3	403	97.0	403	96.9
401.bzip2	4	635	60.8	622	62.0	623	62.0	4	591	65.3	588	65.7	593	65.1
403.gcc	4	485	66.3	490	65.7	483	66.6	4	497	64.9	493	65.3	490	65.7
429.mcf	4	466	78.3	466	78.3	465	78.4	4	453	80.5	452	80.7	452	80.7
445.gobmk	4	528	79.5	533	78.7	523	80.3	4	489	85.8	496	84.6	496	84.6
456.hammer	4	466	80.1	466	80.1	465	80.2	4	363	103	363	103	362	103
458.sjeng	4	589	82.1	591	81.8	591	81.9	4	566	85.6	564	85.8	565	85.7
462.libquantum	4	535	155	537	154	537	154	1	137	151	137	152	137	151
464.h264ref	4	669	132	667	133	668	132	4	633	140	634	140	634	140
471.omnetpp	4	514	48.6	514	48.6	514	48.6	4	483	51.8	482	51.8	482	51.8
473.astar	4	574	48.9	578	48.6	577	48.7	4	505	55.6	502	55.9	503	55.8
483.xalancbmk	4	338	81.8	337	81.8	337	81.8	4	338	81.8	337	81.8	337	81.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Adjacent Sector Prefetch Disabled
Hardware Prefetcher Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 84.1

ProLiant ML310 G5
(3.0 GHz, Intel Xeon X3370)

SPECint_rate_base2006 = 78.6

CPU2006 license: 3

Test date: Sep-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 84.1

ProLiant ML310 G5
(3.0 GHz, Intel Xeon X3370)

SPECint_rate_base2006 = 78.6

CPU2006 license: 3

Test date: Sep-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML310 G5
(3.0 GHz, Intel Xeon X3370)

SPECint_rate2006 = 84.1

SPECint_rate_base2006 = 78.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.html>
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:16:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 November 2008.