



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint[®]_rate2006 = 200

PRIMERGY TX300 S5, Intel Xeon E5520, 2.26 GHz

SPECint_rate_base2006 = 185

CPU2006 license: 19


Test date: Mar-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

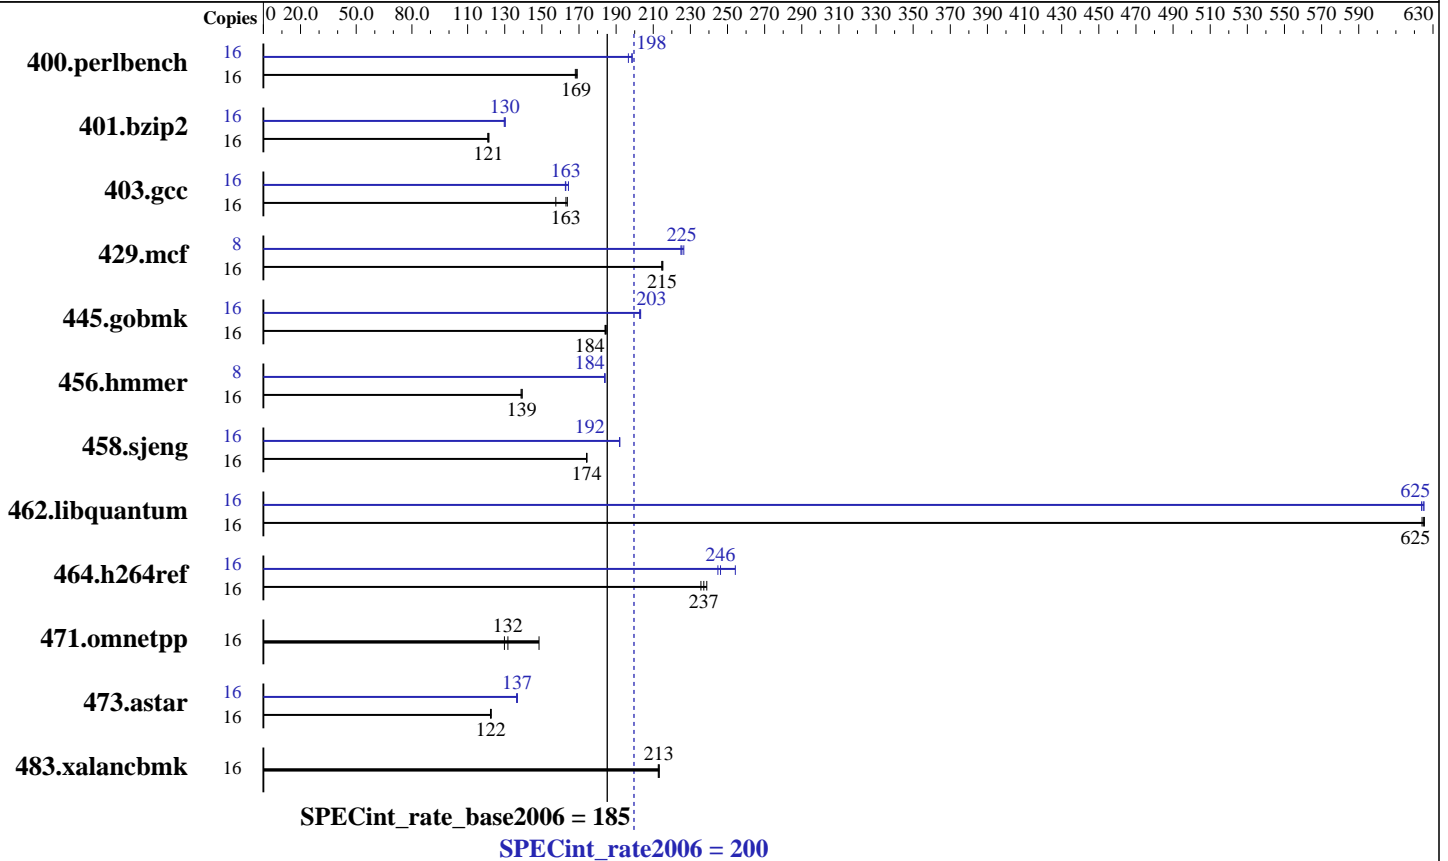

Hardware

CPU Name: Intel Xeon E5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 200

PRIMERGY TX300 S5, Intel Xeon E5520, 2.26 GHz

SPECint_rate_base2006 = 185

CPU2006 license: 19

Test date: Mar-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	925	169	<u>927</u>	<u>169</u>	930	168	16	<u>788</u>	<u>198</u>	787	199	795	197
401.bzip2	16	1278	121	1271	122	<u>1274</u>	<u>121</u>	16	1186	130	1190	130	<u>1186</u>	<u>130</u>
403.gcc	16	<u>790</u>	<u>163</u>	787	164	818	158	16	792	163	<u>791</u>	<u>163</u>	784	164
429.mcf	16	678	215	680	215	<u>679</u>	<u>215</u>	8	322	226	<u>324</u>	<u>225</u>	324	225
445.gobmk	16	<u>911</u>	<u>184</u>	909	185	912	184	16	828	203	<u>827</u>	<u>203</u>	826	203
456.hammer	16	<u>1072</u>	<u>139</u>	1076	139	1071	139	8	406	184	406	184	<u>406</u>	<u>184</u>
458.sjeng	16	1111	174	<u>1111</u>	<u>174</u>	1112	174	16	1009	192	1009	192	<u>1009</u>	<u>192</u>
462.libquantum	16	<u>531</u>	<u>625</u>	530	625	531	624	16	<u>531</u>	<u>625</u>	531	624	530	625
464.h264ref	16	1502	236	1483	239	<u>1493</u>	<u>237</u>	16	<u>1438</u>	<u>246</u>	1393	254	1446	245
471.omnetpp	16	<u>759</u>	<u>132</u>	770	130	674	148	16	<u>759</u>	<u>132</u>	770	130	674	148
473.astar	16	918	122	<u>917</u>	<u>122</u>	915	123	16	<u>822</u>	<u>137</u>	821	137	823	136
483.xalanbmk	16	<u>518</u>	<u>213</u>	518	213	519	213	16	<u>518</u>	<u>213</u>	518	213	519	213

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

This result was measured on the PRIMERGY TX300 S5. The PRIMERGY TX300 S5 and the PRIMERGY RX300 S5 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalanbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 200

PRIMERGY TX300 S5, Intel Xeon E5520, 2.26 GHz

SPECint_rate_base2006 = 185

CPU2006 license: 19

Test date: Mar-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 200

PRIMERGY TX300 S5, Intel Xeon E5520, 2.26 GHz

SPECint_rate_base2006 = 185

CPU2006 license: 19

Test date: Mar-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
 -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
 -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 200

PRIMERGY TX300 S5, Intel Xeon E5520, 2.26 GHz

SPECint_rate_base2006 = 185

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:32:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.