



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 202

PowerEdge M805 (AMD Opteron 2435, 2.60 GHz)

SPECint_rate_base2006 = 159

CPU2006 license: 55


Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

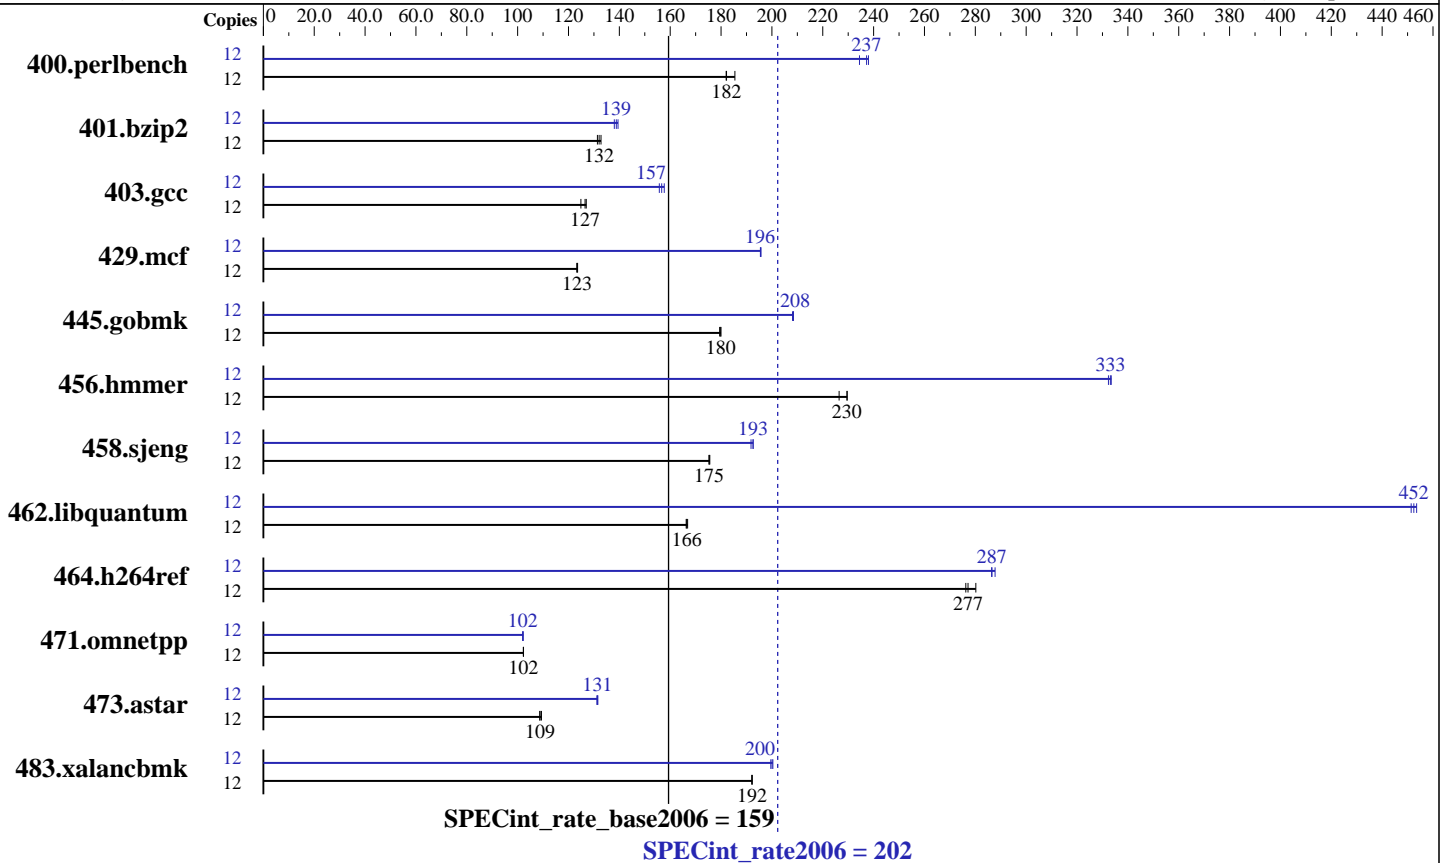

Hardware

CPU Name: AMD Opteron 2435
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 202

PowerEdge M805 (AMD Opteron 2435, 2.60 GHz)

SPECint_rate_base2006 = 159

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	632	185	644	182	644	182	12	500	234	493	238	494	237
401.bzip2	12	872	133	877	132	881	131	12	839	138	834	139	830	139
403.gcc	12	761	127	764	127	774	125	12	620	156	613	158	617	157
429.mcf	12	887	123	887	123	886	124	12	559	196	560	196	560	195
445.gobmk	12	702	179	700	180	700	180	12	605	208	604	208	604	208
456.hammer	12	488	230	494	226	488	230	12	337	332	336	333	336	333
458.sjeng	12	828	175	827	176	828	175	12	754	193	754	193	757	192
462.libquantum	12	1494	166	1495	166	1490	167	12	551	451	548	454	550	452
464.h264ref	12	948	280	958	277	961	276	12	927	286	923	288	927	287
471.omnetpp	12	734	102	733	102	733	102	12	735	102	735	102	734	102
473.astar	12	770	109	775	109	774	109	12	641	131	640	132	642	131
483.xalancbmk	12	431	192	431	192	431	192	12	414	200	413	200	415	200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 202

PowerEdge M805 (AMD Opteron 2435, 2.60 GHz)

SPECint_rate_base2006 = 159

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 202

PowerEdge M805 (AMD Opteron 2435, 2.60 GHz)

SPECint_rate_base2006 = 159

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
            -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
            -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
            -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
            -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 202

PowerEdge M805 (AMD Opteron 2435, 2.60 GHz)

SPECint_rate_base2006 = 159

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
          -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
          -IPA:pu_reorder=2 -CG:ptr_load_use=0
          -OPT:unroll_times_max=8 -INLINE:aggressive=on
          -HP:bdt=2m:heap=2m
```

```
462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
                -CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
                -HP:bdt=2m:heap=2m -OPT:alias=disjoint
                -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000
```

```
464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
             -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
             -CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
            -OPT:alias=disjoint -WOPT:if_conv=0 -m32
            -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

```
473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
           -Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
           -Bstatic_pgi
```

```
483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
              -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
              -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 202

PowerEdge M805 (AMD Opteron 2435, 2.60 GHz)

SPECint_rate_base2006 = 159

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

You can also download the XML flags sources by saving the following links:

- http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>
- <http://www.spec.org/cpu2006/flags/amd-platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:10:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 June 2009.