



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 395

PowerEdge M905 (AMD Opteron 8435, 2.60 GHz)

SPECint_rate_base2006 = 310

CPU2006 license: 55


Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

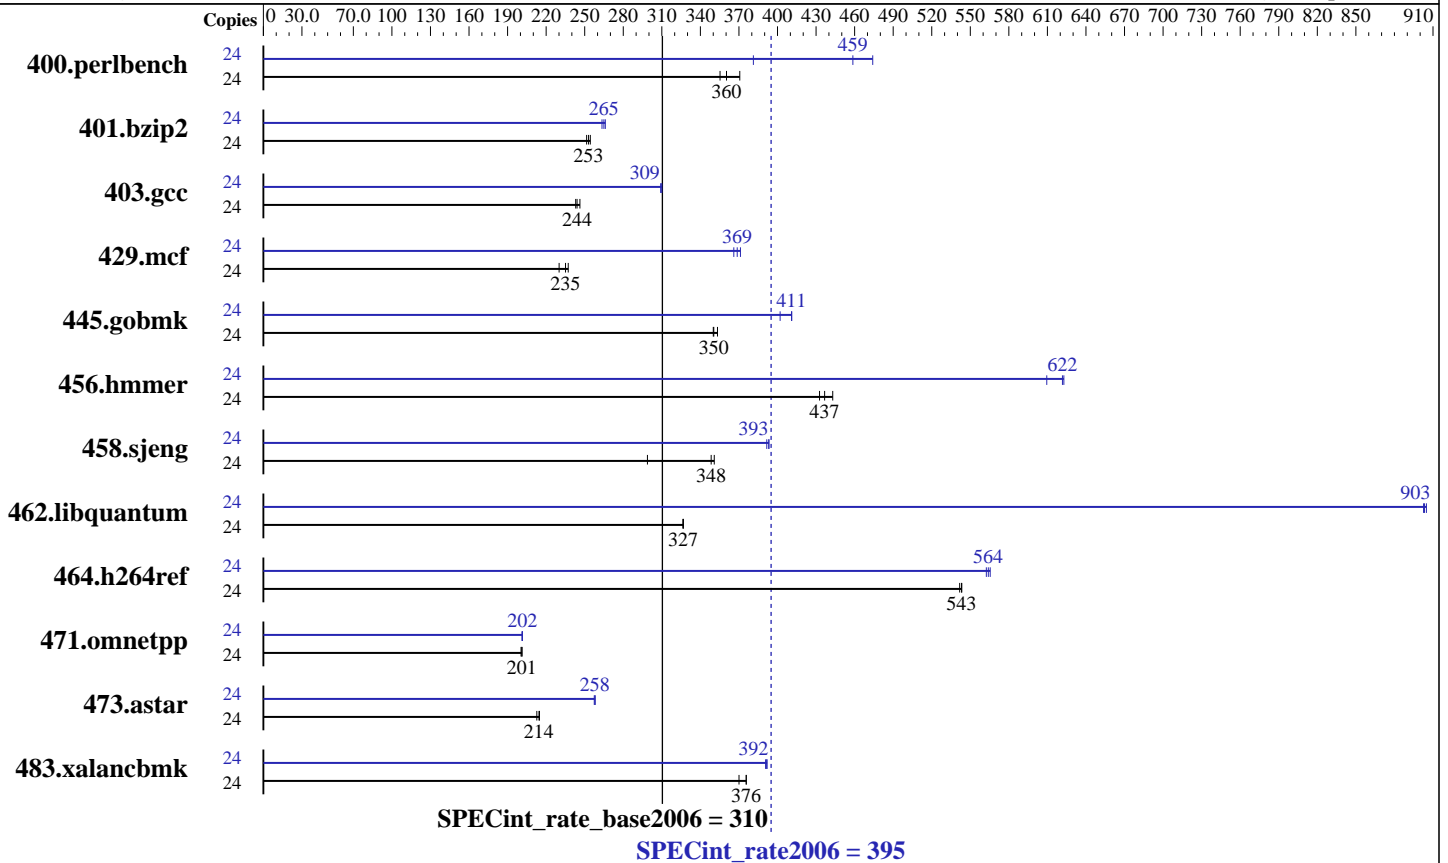

Hardware

CPU Name: AMD Opteron 8435
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0
 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 395

PowerEdge M905 (AMD Opteron 8435, 2.60 GHz)

SPECint_rate_base2006 = 310

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	633	371	660	355	<u>651</u>	<u>360</u>	24	<u>511</u>	<u>459</u>	495	474	615	381
401.bzip2	24	910	254	921	252	<u>915</u>	<u>253</u>	24	879	263	871	266	<u>874</u>	<u>265</u>
403.gcc	24	785	246	<u>792</u>	<u>244</u>	795	243	24	625	309	623	310	<u>625</u>	<u>309</u>
429.mcf	24	923	237	<u>931</u>	<u>235</u>	951	230	24	590	371	<u>594</u>	<u>369</u>	598	366
445.gobmk	24	713	353	719	350	<u>718</u>	<u>350</u>	24	626	402	612	411	<u>613</u>	<u>411</u>
456.hammer	24	505	443	517	433	<u>513</u>	<u>437</u>	24	<u>360</u>	<u>622</u>	367	609	360	623
458.sjeng	24	<u>834</u>	<u>348</u>	828	351	972	299	24	741	392	<u>739</u>	<u>393</u>	738	393
462.libquantum	24	1522	327	<u>1523</u>	<u>327</u>	1523	327	24	<u>550</u>	<u>903</u>	550	905	551	903
464.h264ref	24	<u>978</u>	<u>543</u>	978	543	980	542	24	944	562	939	565	<u>942</u>	<u>564</u>
471.omnetpp	24	745	201	748	200	<u>746</u>	<u>201</u>	24	744	202	<u>744</u>	<u>202</u>	746	201
473.astar	24	784	215	792	213	<u>786</u>	<u>214</u>	24	654	257	653	258	<u>653</u>	<u>258</u>
483.xalancbmk	24	441	376	448	370	<u>441</u>	<u>376</u>	24	424	391	423	392	<u>423</u>	<u>392</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

HyperTransport Technology = HT 1 (Default = HT 3)

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 395

PowerEdge M905 (AMD Opteron 8435, 2.60 GHz)

SPECint_rate_base2006 = 310

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 395

PowerEdge M905 (AMD Opteron 8435, 2.60 GHz)

SPECint_rate_base2006 = 310

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
           -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
           -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
           -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
         -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
         -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
         -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
         -CG:gcm=off -GRA:prioritize_by_density=on -m32
         -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
           -OPT:unroll_times_max=8 -OPT:unroll_size=256
           -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
           -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
           -LNO:ignore_feedback=off -CG:p2align=on
           -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
           -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
           -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 395

PowerEdge M905 (AMD Opteron 8435, 2.60 GHz)

SPECint_rate_base2006 = 310

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
 -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on
 -HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
 -CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
 -HP:bdt=2m:heap=2m -OPT:alias=disjoint
 -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
 -OPT:alias=disjoint -WOPT:if_conv=0 -m32
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
 -Msafeptr=global -Mfp relaxed --zc_eh -tp shanghai-32
 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html>

<http://www.spec.org/cpu2006/flags/amd-platform.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 395

PowerEdge M905 (AMD Opteron 8435, 2.60 GHz)

SPECint_rate_base2006 = 310

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

You can also download the XML flags sources by saving the following links:

- http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml>
- <http://www.spec.org/cpu2006/flags/amd-platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:12:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.