



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint®_rate2006 = 198

ACTINA SOLAR 212 X3 (Intel Xeon E5520)

SPECint_rate_base2006 = 184

CPU2006 license: 9008


Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

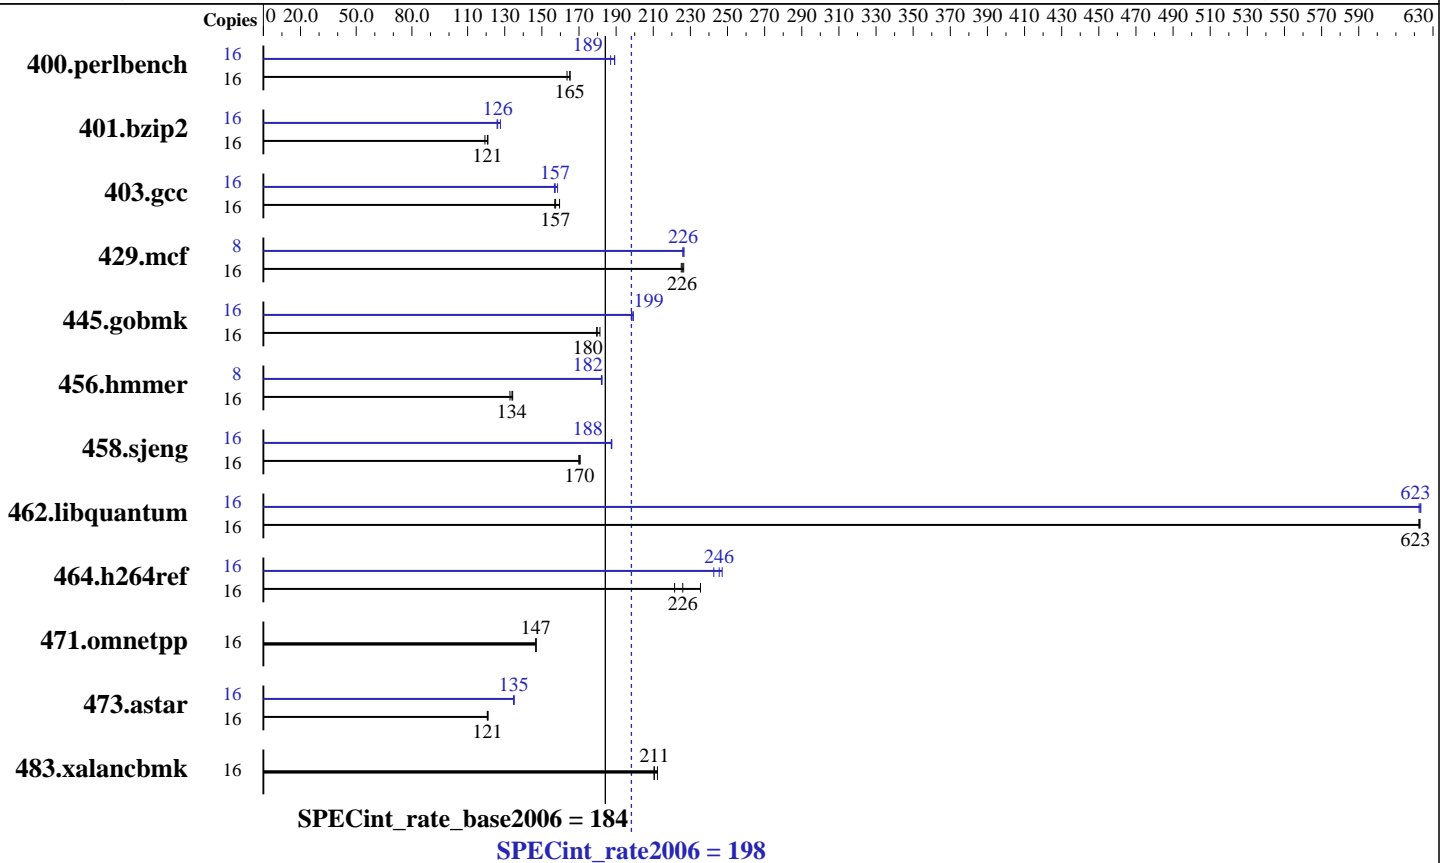

Hardware

CPU Name: Intel Xeon E5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-8500, 1066 MHz, DDR3, ECC)
 Disk Subsystem: 160 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502
 Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = **198**

ACTINA SOLAR 212 X3 (Intel Xeon E5520)

SPECint_rate_base2006 = **184**

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	946	165	<u>947</u>	<u>165</u>	956	164	16	826	189	<u>826</u>	<u>189</u>	836	187
401.bzip2	16	1294	119	1277	121	<u>1279</u>	<u>121</u>	16	1226	126	<u>1223</u>	<u>126</u>	1209	128
403.gcc	16	807	160	821	157	<u>818</u>	<u>157</u>	16	813	158	<u>819</u>	<u>157</u>	822	157
429.mcf	16	645	226	648	225	<u>647</u>	<u>226</u>	8	<u>323</u>	<u>226</u>	322	227	323	226
445.gobmk	16	<u>933</u>	<u>180</u>	926	181	935	180	16	<u>843</u>	<u>199</u>	842	199	846	198
456.hammer	16	1112	134	1124	133	<u>1115</u>	<u>134</u>	8	409	182	410	182	<u>410</u>	<u>182</u>
458.sjeng	16	1139	170	1135	171	<u>1137</u>	<u>170</u>	16	1032	188	<u>1032</u>	<u>188</u>	1033	187
462.libquantum	16	533	622	532	623	<u>532</u>	<u>623</u>	16	533	623	<u>532</u>	<u>623</u>	532	623
464.h264ref	16	1504	235	1599	221	<u>1567</u>	<u>226</u>	16	<u>1442</u>	<u>246</u>	1433	247	1459	243
471.omnetpp	16	<u>681</u>	<u>147</u>	681	147	681	147	16	<u>681</u>	<u>147</u>	681	147	681	147
473.astar	16	928	121	931	121	<u>930</u>	<u>121</u>	16	832	135	<u>833</u>	<u>135</u>	833	135
483.xalancbmk	16	520	212	<u>524</u>	<u>211</u>	525	210	16	520	212	<u>524</u>	<u>211</u>	525	210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 198

ACTINA SOLAR 212 X3 (Intel Xeon E5520)

SPECint_rate_base2006 = 184

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

icpc

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 198

ACTINA SOLAR 212 X3 (Intel Xeon E5520)

SPECint_rate_base2006 = 184

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
 -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 198

ACTINA SOLAR 212 X3 (Intel Xeon E5520)

SPECint_rate_base2006 = 184

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:46:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 December 2009.