



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5504, 2.00 GHz)

SPECint®_rate2006 = 142

SPECint_rate_base2006 = 133

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

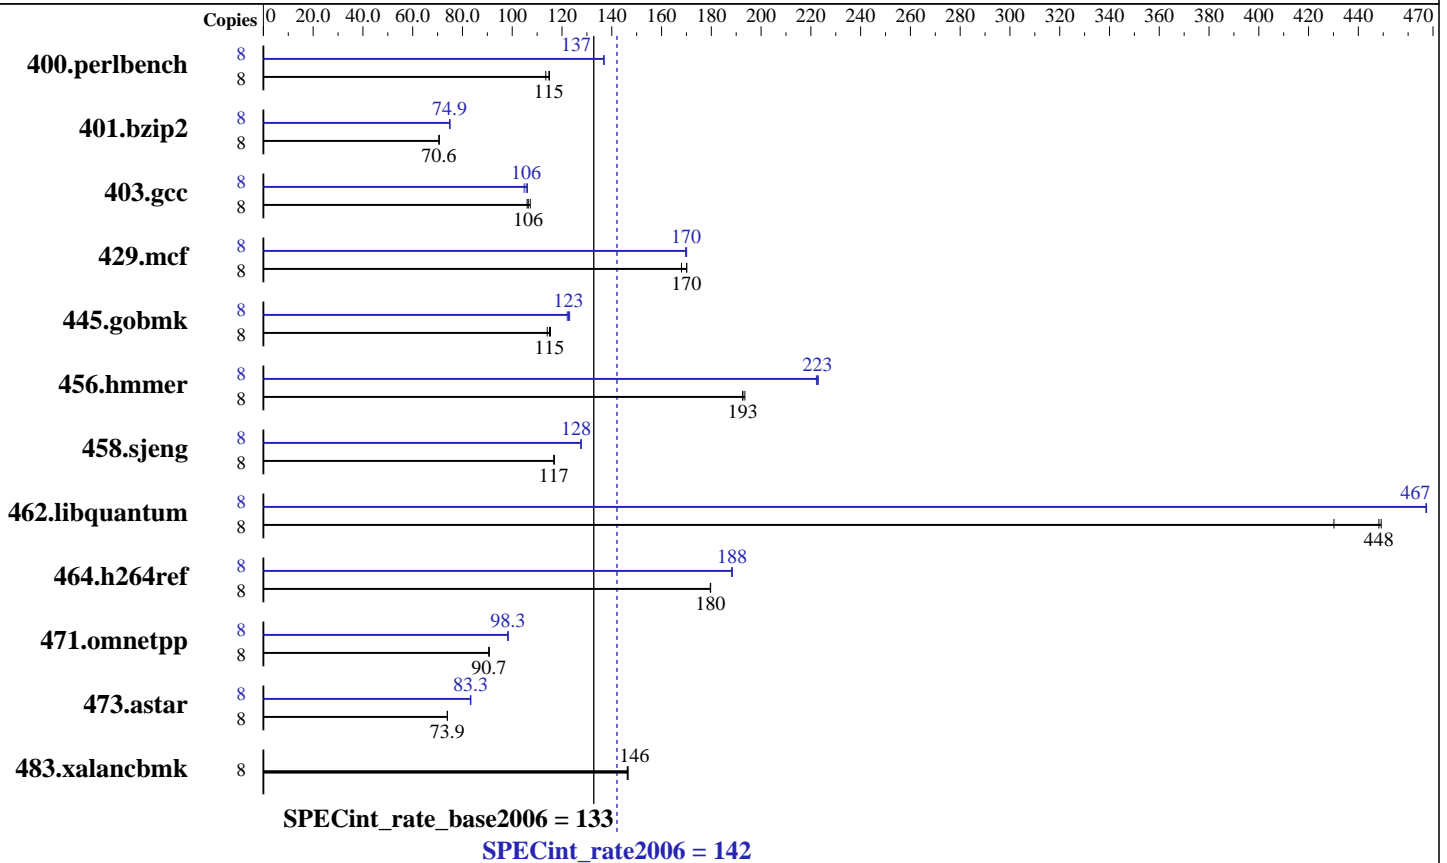

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, running at 800 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.1.064
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate2006 = 142

SPECint_rate_base2006 = 133

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	680	115	<u>681</u>	<u>115</u>	689	113	8	571	137	571	137	<u>571</u>	<u>137</u>
401.bzip2	8	1093	70.6	<u>1094</u>	<u>70.6</u>	1094	70.6	8	1031	74.9	1030	75.0	<u>1031</u>	<u>74.9</u>
403.gcc	8	601	107	608	106	<u>605</u>	<u>106</u>	8	<u>610</u>	<u>106</u>	607	106	615	105
429.mcf	8	434	168	429	170	<u>429</u>	<u>170</u>	8	<u>430</u>	<u>170</u>	429	170	430	170
445.gobmk	8	727	115	736	114	<u>730</u>	<u>115</u>	8	682	123	687	122	<u>684</u>	<u>123</u>
456.hammer	8	386	193	<u>387</u>	<u>193</u>	387	193	8	336	222	<u>335</u>	<u>223</u>	335	223
458.sjeng	8	828	117	<u>829</u>	<u>117</u>	829	117	8	758	128	<u>758</u>	<u>128</u>	758	128
462.libquantum	8	<u>370</u>	<u>448</u>	369	449	385	430	8	<u>355</u>	<u>467</u>	355	467	355	467
464.h264ref	8	986	180	<u>985</u>	<u>180</u>	985	180	8	940	188	<u>940</u>	<u>188</u>	941	188
471.omnetpp	8	551	90.7	552	90.6	<u>551</u>	<u>90.7</u>	8	<u>509</u>	<u>98.3</u>	509	98.2	509	98.3
473.astar	8	760	73.9	759	74.0	<u>760</u>	<u>73.9</u>	8	674	83.3	<u>674</u>	<u>83.3</u>	675	83.2
483.xalancbmk	8	378	146	<u>377</u>	<u>146</u>	377	147	8	378	146	<u>377</u>	<u>146</u>	377	147

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

The Dell PowerEdge R710 (Intel Xeon E5504, 2.00 GHz) and the Bull NovaScale R460 F2 (Intel Xeon E5504, 2.00 GHz) models are electronically equivalent. The results have been measured on a Bull NovaScale R460 F2 (Intel Xeon E5504, 2.00 GHz) model.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate2006 = 142

SPECint_rate_base2006 = 133

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic1.1-32bit -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate2006 = 142

SPECint_rate_base2006 = 133

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5504, 2.00 GHz)

SPECint_rate2006 = 142

SPECint_rate_base2006 = 133

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Optimization Flags (Continued)

473.astar (continued):
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:49:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2010.