



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

### SPECint®\_rate2006 = 379

### NovaScale R440 F2 (Intel Xeon X5680, 3.33 GHz)

### SPECint\_rate\_base2006 = 354

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

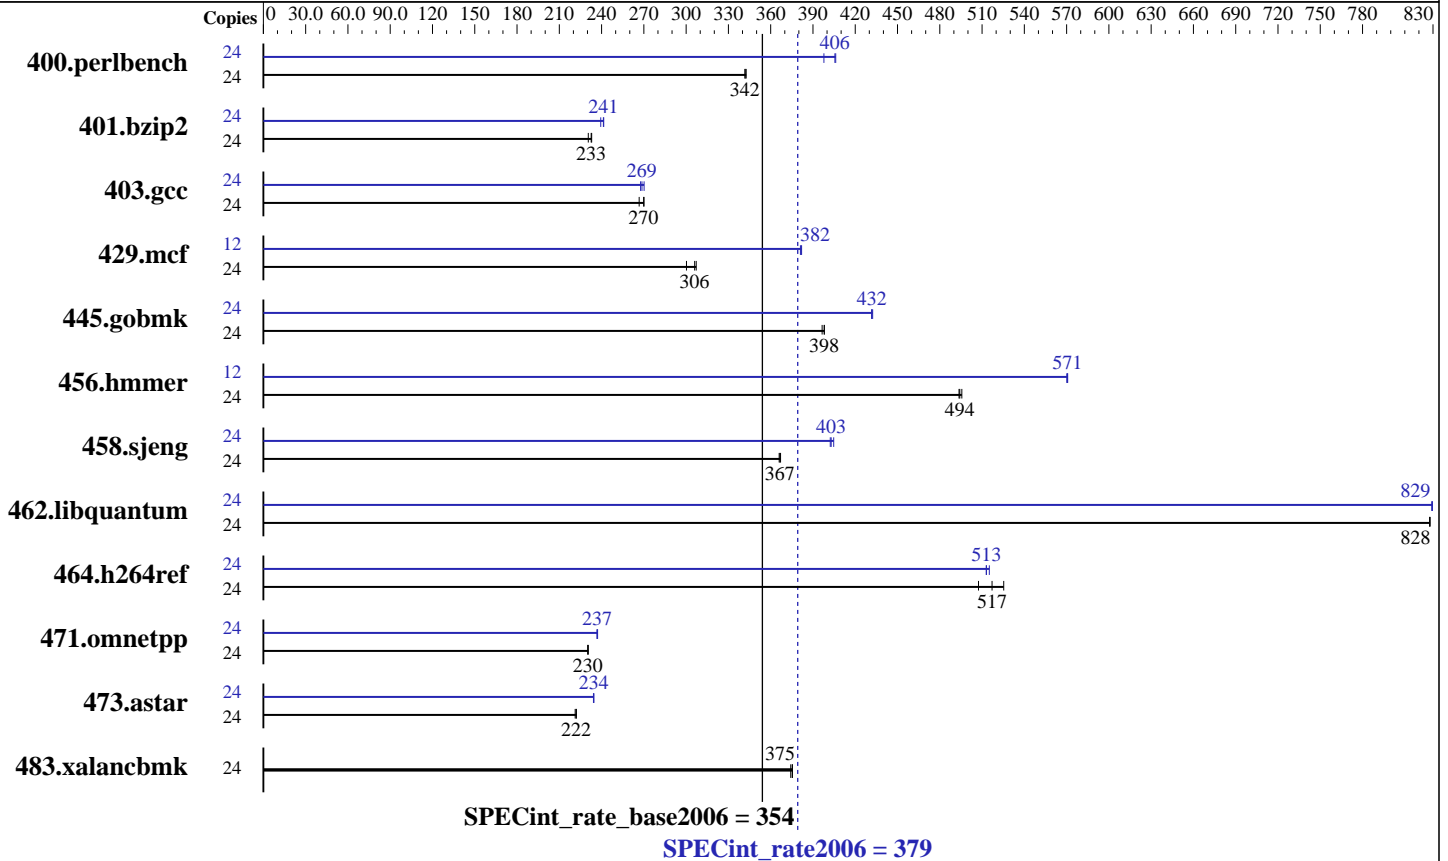

### Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 379

NovaScale R440 F2 (Intel Xeon X5680, 3.33 GHz)

SPECint\_rate\_base2006 = 354

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Mar-2010  
Hardware Availability: Mar-2010  
Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>686</b>	<b>342</b>	686	342	684	343	24	589	398	577	406	<b>578</b>	<b>406</b>
401.bzip2	24	1004	231	994	233	<b>996</b>	<b>233</b>	24	967	239	<b>960</b>	<b>241</b>	959	242
403.gcc	24	<b>716</b>	<b>270</b>	724	267	715	270	24	715	270	722	268	<b>719</b>	<b>269</b>
429.mcf	24	729	300	713	307	<b>715</b>	<b>306</b>	12	287	381	287	382	<b>287</b>	<b>382</b>
445.gobmk	24	632	398	<b>633</b>	<b>398</b>	635	397	24	583	432	582	432	<b>583</b>	<b>432</b>
456.hammer	24	454	494	<b>453</b>	<b>494</b>	452	496	12	196	571	<b>196</b>	<b>571</b>	196	570
458.sjeng	24	793	366	791	367	<b>792</b>	<b>367</b>	24	<b>721</b>	<b>403</b>	718	405	722	402
462.libquantum	24	601	828	601	828	<b>601</b>	<b>828</b>	24	599	830	600	829	<b>600</b>	<b>829</b>
464.h264ref	24	1011	525	<b>1027</b>	<b>517</b>	1047	507	24	<b>1035</b>	<b>513</b>	1035	513	1031	515
471.omnetpp	24	652	230	651	231	<b>651</b>	<b>230</b>	24	632	237	634	237	<b>633</b>	<b>237</b>
473.astar	24	<b>759</b>	<b>222</b>	759	222	761	221	24	718	234	<b>719</b>	<b>234</b>	719	234
483.xalancbmk	24	441	375	443	374	<b>441</b>	<b>375</b>	24	441	375	443	374	<b>441</b>	<b>375</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

The Dell PowerEdge R610 and  
the Bull NovaScale R440 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R610 model.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 379**

NovaScale R440 F2 (Intel Xeon X5680, 3.33 GHz)

**SPECint\_rate\_base2006 = 354**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Mar-2010  
**Hardware Availability:** Mar-2010  
**Software Availability:** Dec-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 379

NovaScale R440 F2 (Intel Xeon X5680, 3.33 GHz)

SPECint\_rate\_base2006 = 354

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Mar-2010  
Hardware Availability: Mar-2010  
Software Availability: Dec-2009

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 379

NovaScale R440 F2 (Intel Xeon X5680, 3.33 GHz)

SPECint\_rate\_base2006 = 354

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

```

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:15:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 April 2010.