



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu


SPECint[®]_rate2006 = 231

PRIMERGY BX922 S2, Intel Xeon E5630, 2.53 GHz

SPECint_rate_base2006 = 217

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

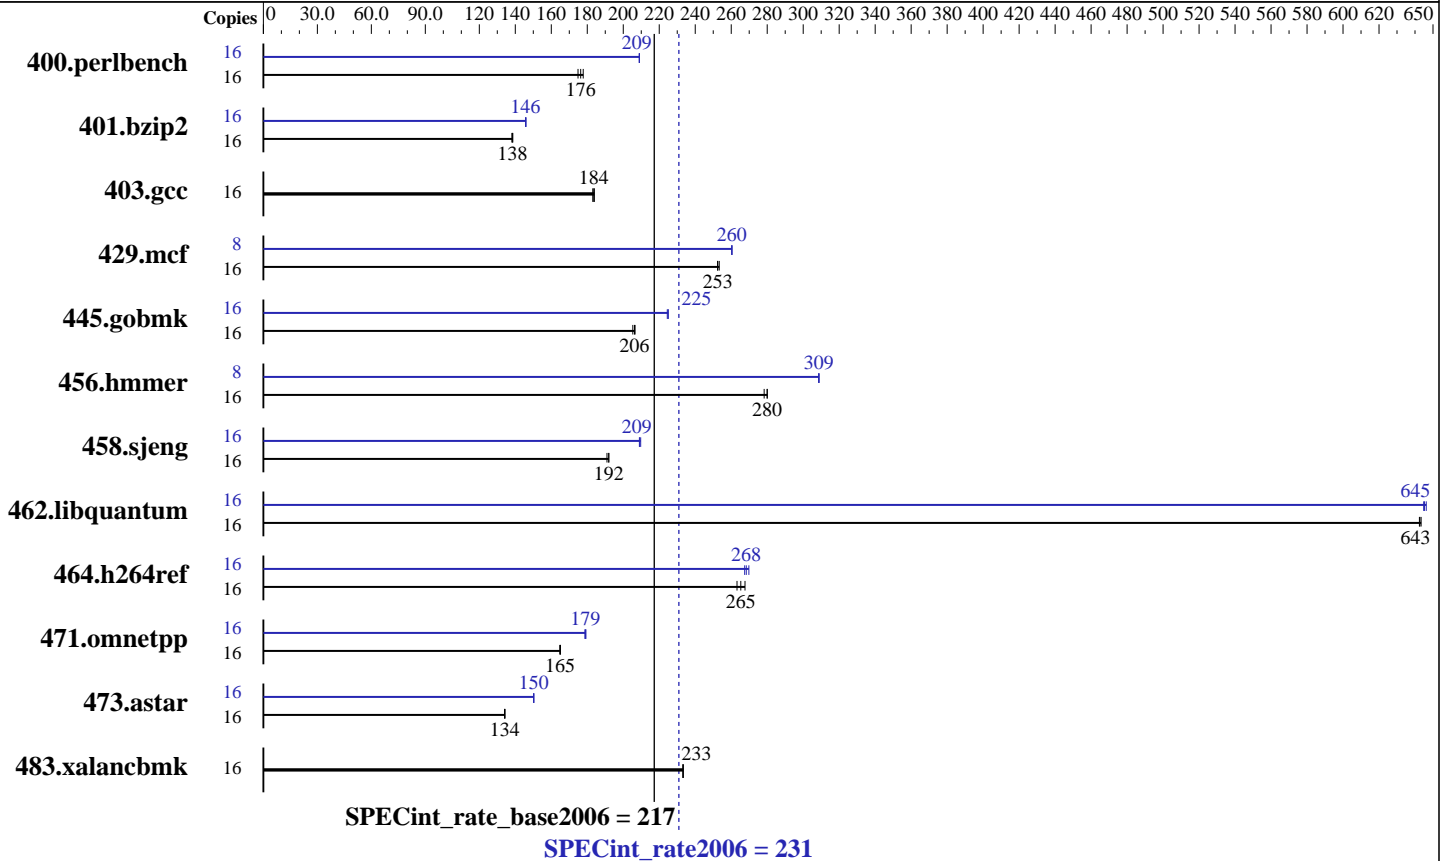

Hardware

CPU Name: Intel Xeon E5630
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
 Disk Subsystem: 1 x SSD SATA, 64 GB
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 231

PRIMERGY BX922 S2, Intel Xeon E5630, 2.53 GHz

SPECint_rate_base2006 = 217

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	879	178	887	176	894	175	16	748	209	748	209	748	209
401.bzip2	16	1114	139	1118	138	1116	138	16	1060	146	1059	146	1058	146
403.gcc	16	701	184	700	184	704	183	16	701	184	700	184	704	183
429.mcf	16	578	252	576	253	578	253	8	280	260	280	260	280	260
445.gobmk	16	814	206	813	207	818	205	16	746	225	746	225	748	224
456.hammer	16	533	280	536	278	533	280	8	242	309	242	309	242	309
458.sjeng	16	1009	192	1008	192	1014	191	16	926	209	923	210	926	209
462.libquantum	16	516	642	516	643	515	643	16	514	645	514	645	513	646
464.h264ref	16	1323	268	1345	263	1335	265	16	1324	267	1312	270	1319	268
471.omnetpp	16	607	165	606	165	606	165	16	559	179	558	179	560	179
473.astar	16	838	134	837	134	837	134	16	748	150	748	150	747	150
483.xalancbmk	16	473	233	473	233	473	233	16	473	233	473	233	473	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1066 MHz.
BIOS configuration:
Data Reuse Optimization = Disabled
Turbo Boost Technology: Performance/Power Setting = Traditional

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 231

PRIMERGY BX922 S2, Intel Xeon E5630, 2.53 GHz

SPECint_rate_base2006 = 217

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 231

PRIMERGY BX922 S2, Intel Xeon E5630, 2.53 GHz

SPECint_rate_base2006 = 217

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: basepeak = yes
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 231

PRIMERGY BX922 S2, Intel Xeon E5630, 2.53 GHz

SPECint_rate_base2006 = 217

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:23:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 May 2010.