



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECint®\_rate2006 = 223

Motherboard X8DTE-F (Intel Xeon E5620, 2.40 GHz)

### SPECint\_rate\_base2006 = 210

CPU2006 license: 001176


Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

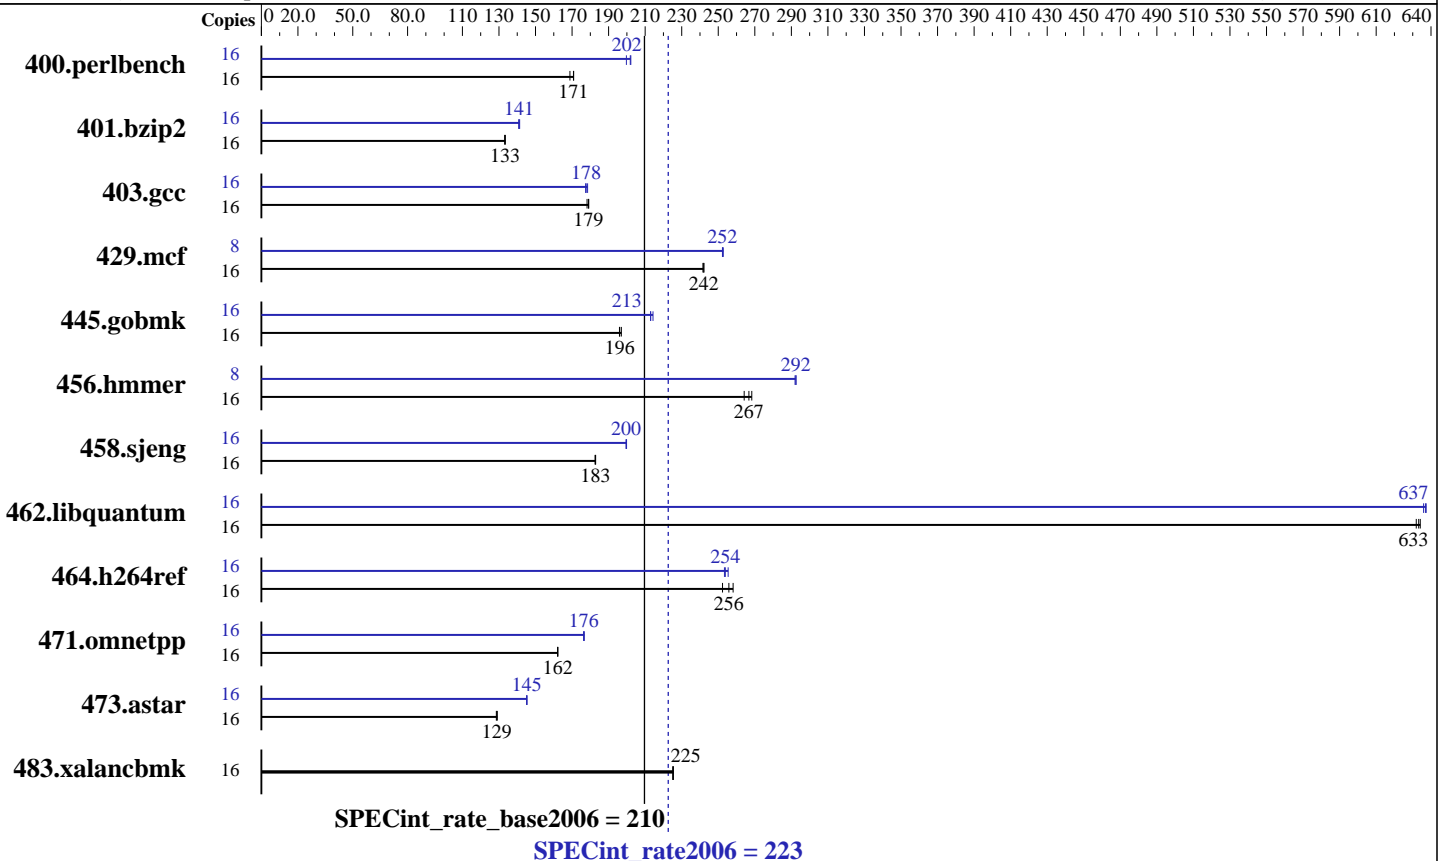

### Hardware

CPU Name: Intel Xeon E5620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1066 RDIMM, ECC, CL7)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint\_rate2006 = 223

Motherboard X8DTE-F (Intel Xeon E5620, 2.40 GHz)

SPECint\_rate\_base2006 = 210

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>915</b>	<b>171</b>	926	169	915	171	16	773	202	783	200	<b>774</b>	<b>202</b>
401.bzip2	16	<b>1158</b>	<b>133</b>	1160	133	1157	133	16	<b>1095</b>	<b>141</b>	1096	141	1093	141
403.gcc	16	<b>719</b>	<b>179</b>	723	178	719	179	16	<b>725</b>	<b>178</b>	722	178	726	177
429.mcf	16	604	242	603	242	<b>603</b>	<b>242</b>	8	289	252	289	253	<b>289</b>	<b>252</b>
445.gobmk	16	<b>856</b>	<b>196</b>	852	197	857	196	16	<b>788</b>	<b>213</b>	783	214	788	213
456.hammer	16	<b>560</b>	<b>267</b>	556	268	565	264	8	<b>255</b>	<b>292</b>	255	293	256	292
458.sjeng	16	1058	183	1060	183	<b>1059</b>	<b>183</b>	16	<b>970</b>	<b>200</b>	970	200	969	200
462.libquantum	16	525	632	<b>524</b>	<b>633</b>	523	634	16	520	637	<b>520</b>	<b>637</b>	521	636
464.h264ref	16	<b>1384</b>	<b>256</b>	1372	258	1403	252	16	1397	253	<b>1395</b>	<b>254</b>	1386	255
471.omnetpp	16	<b>617</b>	<b>162</b>	617	162	617	162	16	<b>567</b>	<b>176</b>	566	177	567	176
473.astar	16	870	129	<b>871</b>	<b>129</b>	874	129	16	774	145	<b>773</b>	<b>145</b>	773	145
483.xalancbmk	16	490	225	<b>490</b>	<b>225</b>	490	225	16	490	225	<b>490</b>	<b>225</b>	490	225

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
As tested, the system used a Supermicro  
PWS-865-PQ power supply, 2 SNK-P0038P heatsinks,  
and 2 FAN-0077L cooling fans.

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 223

Motherboard X8DTE-F (Intel Xeon E5620, 2.40 GHz)

SPECint\_rate\_base2006 = 210

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 223

Motherboard X8DTE-F (Intel Xeon E5620, 2.40 GHz)

SPECint\_rate\_base2006 = 210

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint\_rate2006 = 223

Motherboard X8DTE-F (Intel Xeon E5620, 2.40 GHz)

SPECint\_rate\_base2006 = 210

CPU2006 license: 001176

Test date: Apr-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 09:07:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 June 2010.