



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint®_rate2006 = 96.2

Motherboard X8SIU-F (Intel Xeon L3426, 1.86 GHz)

SPECint_rate_base2006 = 90.2

CPU2006 license: 001176


Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

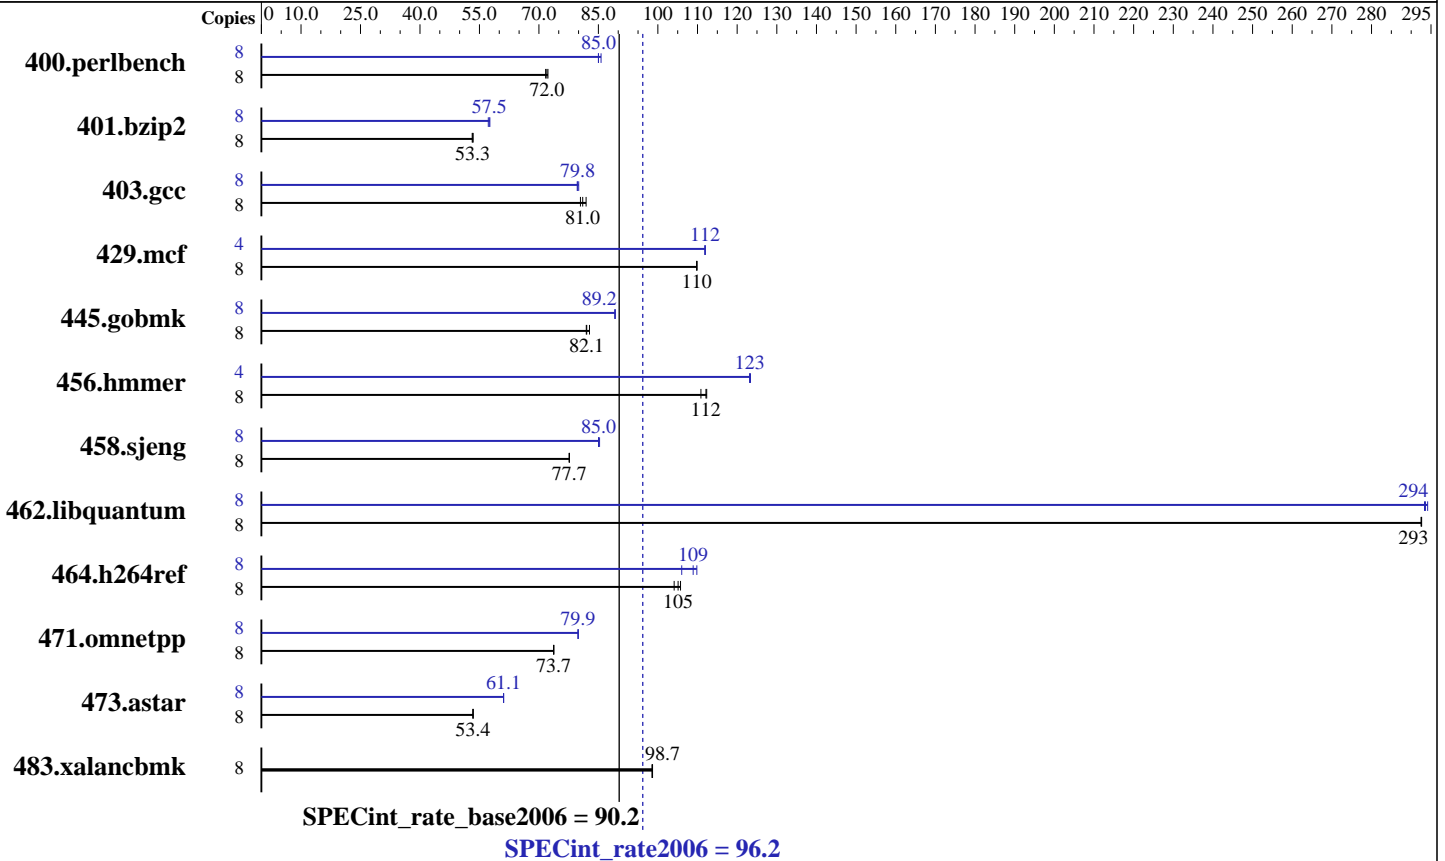

Hardware

CPU Name: Intel Xeon L3426
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB 2Rx8 DDR3-1333 RDIMM, ECC, CL9)
 Disk Subsystem: 1 x 160 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: 1_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 96.2

Motherboard X8SIU-F (Intel Xeon L3426, 1.86 GHz)

SPECint_rate_base2006 = 90.2

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1090	71.7	1086	72.0	1081	72.3	8	912	85.7	919	85.0	919	85.0
401.bzip2	8	1446	53.4	1448	53.3	1452	53.2	8	1343	57.5	1340	57.6	1349	57.2
403.gcc	8	795	81.0	786	81.9	800	80.5	8	808	79.7	805	80.0	807	79.8
429.mcf	8	664	110	664	110	664	110	4	326	112	326	112	326	112
445.gobmk	8	1023	82.1	1024	81.9	1014	82.8	8	940	89.3	941	89.1	941	89.2
456.hammer	8	665	112	673	111	666	112	4	303	123	303	123	303	123
458.sjeng	8	1246	77.7	1246	77.7	1247	77.6	8	1138	85.0	1135	85.3	1138	85.0
462.libquantum	8	567	293	566	293	567	293	8	564	294	565	294	565	293
464.h264ref	8	1675	106	1684	105	1701	104	8	1670	106	1612	110	1626	109
471.omnetpp	8	678	73.7	678	73.7	678	73.8	8	626	79.9	626	79.9	626	79.9
473.astar	8	1053	53.3	1051	53.4	1052	53.4	8	919	61.1	920	61.1	919	61.1
483.xalancbmk	8	560	98.7	560	98.7	560	98.5	8	560	98.7	560	98.7	560	98.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro CSE-815TQ-330UB chassis.
The chassis is bundled with a PWS-333-1H20 power supply, a SNK-P0046P heatsink, and 4 FAN-0086L4 cooling fans.

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 96.2

Motherboard X8SIU-F (Intel Xeon L3426, 1.86 GHz)

SPECint_rate_base2006 = 90.2

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 96.2

Motherboard X8SIU-F (Intel Xeon L3426, 1.86 GHz)

SPECint_rate_base2006 = 90.2

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 96.2

Motherboard X8SIU-F (Intel Xeon L3426, 1.86 GHz)

SPECint_rate_base2006 = 90.2

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:09:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2010.