



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint®_rate2006 = 71.0

Acer AT115 F1 (AMD Opteron 4122, 2.20 GHz)

SPECint_rate_base2006 = 61.9

CPU2006 license: 97


Test date: Oct-2010

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2010

Tested by: Acer Incorporated

Software Availability: Aug-2010

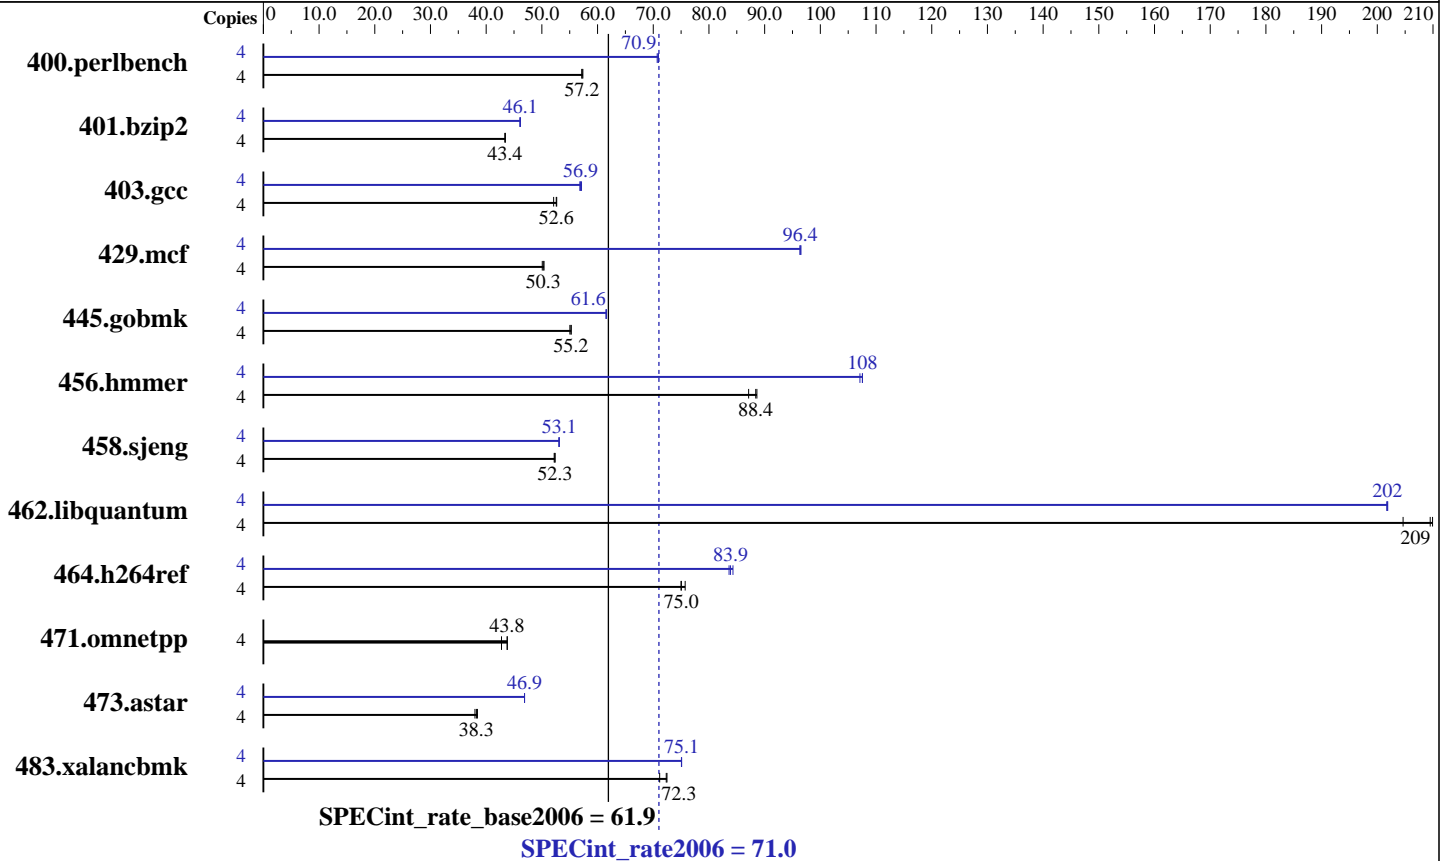

Hardware

CPU Name: AMD Opteron 4122
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 640 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 71.0

Acer AT115 F1 (AMD Opteron 4122, 2.20 GHz)

SPECint_rate_base2006 = 61.9

CPU2006 license: 97

Test date: Oct-2010

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2010

Tested by: Acer Incorporated

Software Availability: Aug-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	683	57.2	684	57.2	681	57.4	4	551	70.9	553	70.7	552	70.9
401.bzip2	4	889	43.4	889	43.4	889	43.4	4	837	46.1	836	46.1	838	46.1
403.gcc	4	611	52.7	612	52.6	618	52.1	4	565	56.9	564	57.1	567	56.8
429.mcf	4	724	50.4	726	50.3	729	50.1	4	378	96.4	379	96.3	378	96.5
445.gobmk	4	759	55.3	760	55.2	763	55.0	4	682	61.5	682	61.6	682	61.6
456.hammer	4	422	88.4	421	88.6	428	87.1	4	347	108	347	108	348	107
458.sjeng	4	925	52.3	924	52.4	927	52.2	4	911	53.1	912	53.1	911	53.1
462.libquantum	4	395	210	396	209	405	205	4	411	202	411	202	411	202
464.h264ref	4	1169	75.7	1180	75.0	1180	75.0	4	1050	84.3	1055	83.9	1059	83.6
471.omnetpp	4	571	43.8	571	43.8	585	42.8	4	571	43.8	571	43.8	585	42.8
473.astar	4	731	38.4	734	38.3	739	38.0	4	599	46.9	599	46.9	599	46.9
483.xalancbmk	4	382	72.3	381	72.5	388	71.2	4	368	75.1	368	75.1	368	75.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=3584 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>
Binaries were compiled on SLES10 SP2 with binutils 2.18
The Acer AT115 F1, and Gateway GT115 F1 are electronically equivalent.
This result was measured on Gateway GT115 F1.



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 71.0

Acer AT115 F1 (AMD Opteron 4122, 2.20 GHz)

SPECint_rate_base2006 = 61.9

CPU2006 license: 97

Test date: Oct-2010

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2010

Tested by: Acer Incorporated

Software Availability: Aug-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 71.0

Acer AT115 F1 (AMD Opteron 4122, 2.20 GHz)

SPECint_rate_base2006 = 61.9

CPU2006 license: 97

Test date: Oct-2010

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2010

Tested by: Acer Incorporated

Software Availability: Aug-2010

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch Ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
            -OPT:alias=disjoint -OPT:unroll_times_max=8
            -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:local_sched_alg=1 -CG:cflow=0
            -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
            -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 71.0

Acer AT115 F1 (AMD Opteron 4122, 2.20 GHz)

SPECint_rate_base2006 = 61.9

CPU2006 license: 97

Test date: Oct-2010

Test sponsor: Acer Incorporated

Hardware Availability: Oct-2010

Tested by: Acer Incorporated

Software Availability: Aug-2010

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
          -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
          -IPA:pu_reorder=2 -CG:ptr_load_use=0
          -OPT:unroll_times_max=8 -INLINE:aggressive=on
```

```
462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
                -CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
                -HP:bdt=2m:heap=2m -OPT:alias=disjoint
                -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000
```

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
             -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
             -CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
           -WOPT:if_conv=0 -GRA:optimize_boundary=on
           -OPT:alias=disjoint -INLINE:aggressive=on
           -IPA:small_pu=3000 -IPA:plimit=3000 -m32
           -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
               -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
               -fno-emit-exceptions
               -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 71.0

Acer AT115 F1 (AMD Opteron 4122, 2.20 GHz)

SPECint_rate_base2006 = 61.9

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Oct-2010

Hardware Availability: Oct-2010

Software Availability: Aug-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:22:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 October 2010.