



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Power 740 Express (3.55 GHz, 16 core, RedHat)

**SPECint®\_rate2006 = 581**

**SPECint\_rate\_base2006 = 518**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Sep-2010

Software Availability: Nov-2010

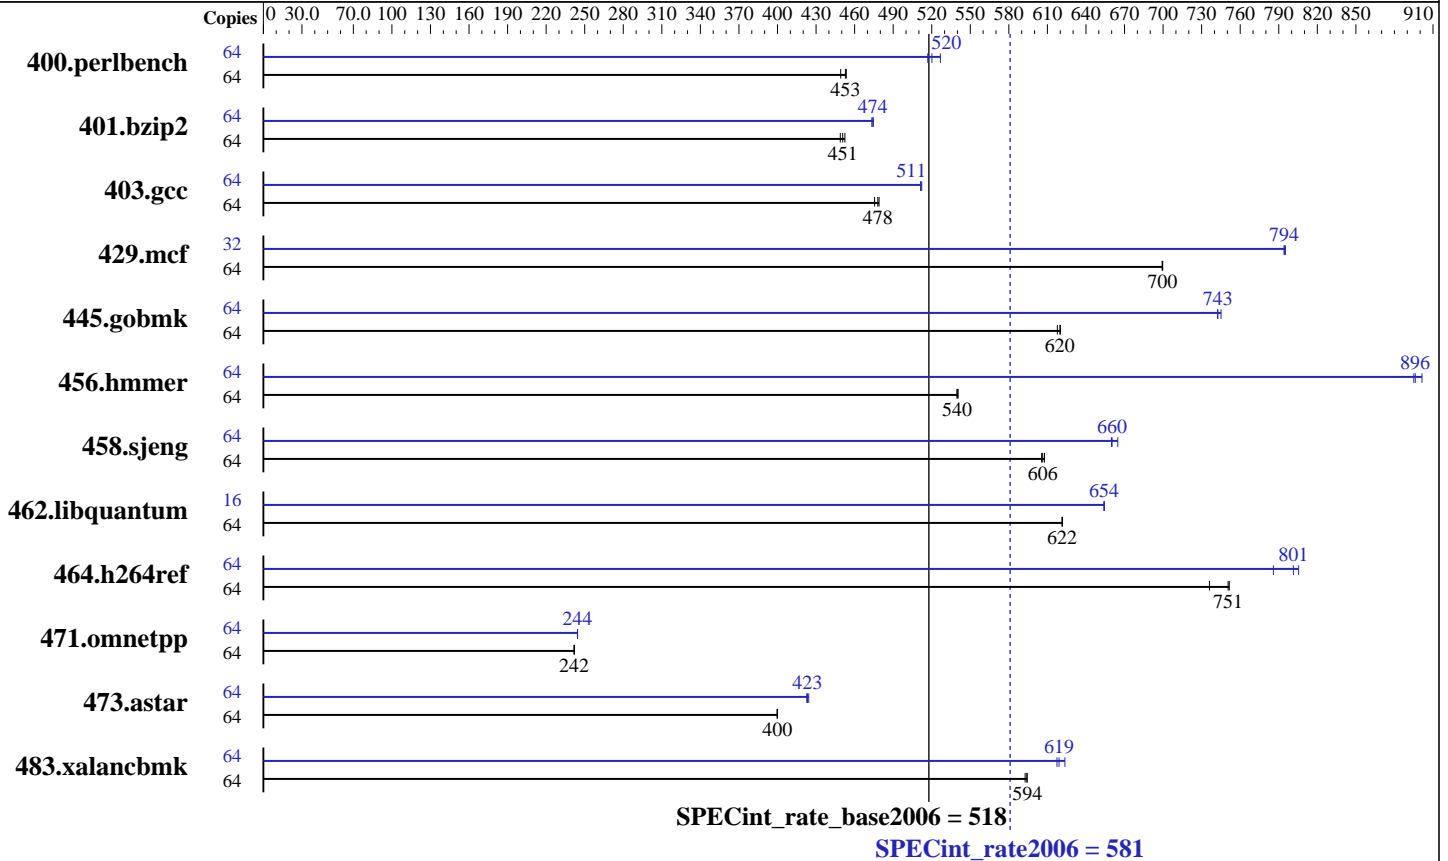

### Hardware

CPU Name: POWER7  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.86 GHz  
 CPU MHz: 3556  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 8,16 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per core  
 Other Cache: None  
 Memory: 256 GB (32x8 GB) DDR3 1066 MHz  
 Disk Subsystem: 4x146.8 GB Software RAID-0 SAS SFF 15K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.0 (ppc64), Kernel 2.6.32-71.el6.ppc64  
 Compiler: IBM XL C/C++ for Linux, V11.1 Updated with the Nov2010 PTF  
 Auto Parallel: No  
 File System: ext2  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-3  
 -MicroQuill SmartHeap 9



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Power 740 Express (3.55 GHz, 16 core, RedHat)

SPECint\_rate2006 = 581

SPECint\_rate\_base2006 = 518

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2010

Hardware Availability: Sep-2010

Software Availability: Nov-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1392	449	<b><u>1381</u></b>	<b><u>453</u></b>	1379	454	64	<b><u>1202</u></b>	<b><u>520</u></b>	1187	527	1210	517
401.bzip2	64	<b><u>1370</u></b>	<b><u>451</u></b>	1376	449	1365	452	64	1305	473	1301	475	<b><u>1303</u></b>	<b><u>474</u></b>
403.gcc	64	<b><u>1078</u></b>	<b><u>478</u></b>	1083	476	1076	479	64	1008	511	1006	512	<b><u>1007</u></b>	<b><u>511</u></b>
429.mcf	64	835	699	834	700	<b><u>834</u></b>	<b><u>700</u></b>	32	367	795	367	794	<b><u>367</u></b>	<b><u>794</u></b>
445.gobmk	64	1083	620	1087	618	<b><u>1083</u></b>	<b><u>620</u></b>	64	904	742	<b><u>904</u></b>	<b><u>743</u></b>	901	745
456.hmmer	64	1105	541	<b><u>1106</u></b>	<b><u>540</u></b>	1106	540	64	662	901	667	895	<b><u>666</u></b>	<b><u>896</u></b>
458.sjeng	64	1274	608	<b><u>1277</u></b>	<b><u>606</u></b>	1279	605	64	1165	665	<b><u>1173</u></b>	<b><u>660</u></b>	1174	660
462.libquantum	64	2133	622	<b><u>2134</u></b>	<b><u>622</u></b>	2134	621	16	507	654	<b><u>507</u></b>	<b><u>654</u></b>	507	654
464.h264ref	64	<b><u>1887</u></b>	<b><u>751</u></b>	1885	751	1924	736	64	1802	786	<b><u>1767</u></b>	<b><u>801</u></b>	1758	805
471.omnetpp	64	1653	242	<b><u>1653</u></b>	<b><u>242</u></b>	1655	242	64	1636	244	<b><u>1636</u></b>	<b><u>244</u></b>	1637	244
473.astar	64	1124	400	<b><u>1123</u></b>	<b><u>400</u></b>	1123	400	64	1063	423	1059	424	<b><u>1061</u></b>	<b><u>423</u></b>
483.xalanbmk	64	743	594	<b><u>743</u></b>	<b><u>594</u></b>	745	593	64	708	624	715	617	<b><u>713</u></b>	<b><u>619</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

IBM Post-Link Optimization tool with options "-O4 -omullX" used for 400.perlbench

options "-O4 -vrox" used for 401.bzip2

options "-O4 -nodp -rtb" used for 403.gcc

options "-O3" used for 429.mcf 445.gobmk 458.sjeng 473.astar

options "-O4 -nodp -m power7" used for 456.hmmer

options "-O4 -vrox -nodp" used for 462.libquantum

options "-O4 -vrox -nodp -rtb" used for 464.h264ref

options "-O3 -lu -l -nodp -sdp 9" used for 471.omnetpp

options "-O3 -m power7" used for 483.xalanbmk

Whenever option "-omullX" was used during the optimization phase, option "-imullX" was also used during the instrumentation phase.

## Submit Notes

The config file option 'submit' was used.  
Benchmarks bound to a processor using numactl on the submit command.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 581**

IBM Power 740 Express (3.55 GHz, 16 core, RedHat)

**SPECint\_rate\_base2006 = 518**

**CPU2006 license:** 11

**Test date:** Oct-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Sep-2010

**Tested by:** IBM Corporation

**Software Availability:** Nov-2010

## Operating System Notes

```

ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
  echo 4224 > /proc/sys/vm/nr_hugepages
The following environment variables were set before the runspec command:
XLFRTEOPTS=intrinths=1
HUGETLB_VERBOSE=0
HUGETLB_MORECORE=yes
HUGETLB_ELFMAP=RW

```

## Base Compiler Invocation

```

C benchmarks:
  xlc -qlanglvl=extc99

C++ benchmarks:
  xlC

```

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Base Optimization Flags

```

C benchmarks:
  -O5 -qarch=pwr7 -qtune=pwr7 -qalias=noansi -qalloca -lhugetlbfs

C++ benchmarks:
  -O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lsmartheap

```

## Base Other Flags

```

C benchmarks:
  -qipa=threads

C++ benchmarks:
  -qipa=threads

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Power 740 Express (3.55 GHz, 16 core, RedHat)

**SPECint\_rate2006 = 581**

**SPECint\_rate\_base2006 = 518**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Oct-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Nov-2010

## Peak Compiler Invocation

C benchmarks:

xlC -qlanglvl=extc99

C++ benchmarks:

xlC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_PPC  
462.libquantum: -DSPEC\_CPU\_LINUX  
464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalias=noansi -qipa=level=2 -lsmartheap  
401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs  
403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalloca -lhugetlbfs  
429.mcf: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs  
445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs  
456.hmmer: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -qsimd  
-qassert=refalign -qipa=inline=threshold=2888  
-qipa=inline=limit=11880 -lhugetlbfs  
458.sjeng: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs  
462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -q64 -lhugetlbfs  
464.h264ref: Same as 458.sjeng

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Power 740 Express (3.55 GHz, 16 core, RedHat)

**SPECint\_rate2006 = 581**

**SPECint\_rate\_base2006 = 518**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Oct-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Nov-2010

## Peak Optimization Flags (Continued)

471.omnetpp: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs -lsmartheap

483.xalancbmk: -Wl,-q -O4 -qarch=pwr7 -qtune=pwr7 -qipa=partition=large  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-qipa=threads

C++ benchmarks:

-qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:27:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 November 2010.