



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-2022G-URF,  
AMD Opteron 6134

SPECint®\_rate2006 = 285

SPECint\_rate\_base2006 = 247

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

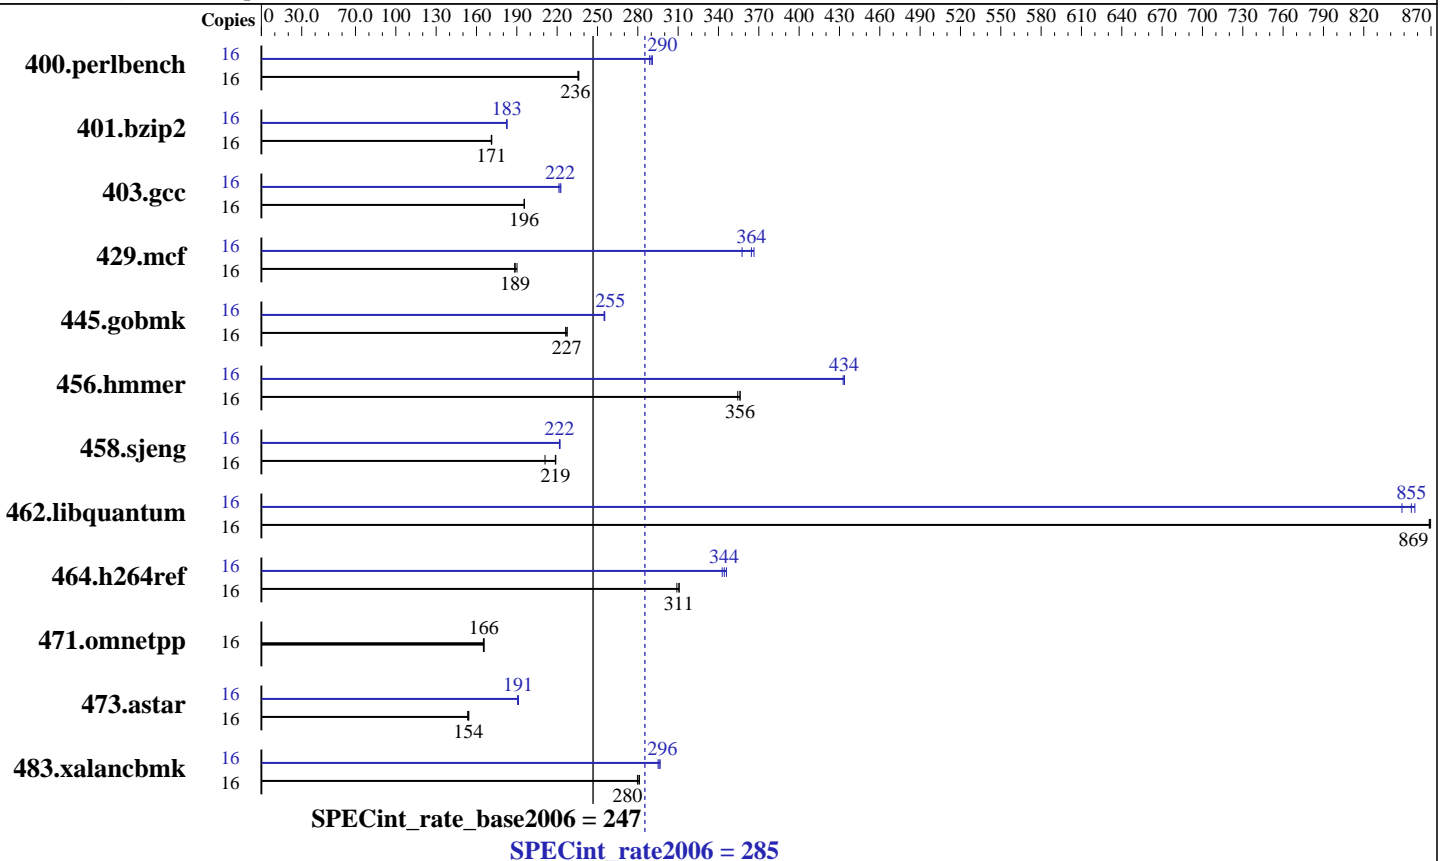

### Hardware

CPU Name: AMD Opteron 6134  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.5,  
Kernel 2.6.18-194.el5  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-2022G-URF,  
AMD Opteron 6134

SPECint\_rate2006 = 285

SPECint\_rate\_base2006 = 247

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	664	235	662	236	<b>663</b>	<b>236</b>	16	541	289	537	291	<b>539</b>	<b>290</b>
401.bzip2	16	<b>902</b>	<b>171</b>	903	171	901	171	16	846	182	<b>845</b>	<b>183</b>	845	183
403.gcc	16	<b>659</b>	<b>196</b>	658	196	659	196	16	582	221	<b>580</b>	<b>222</b>	578	223
429.mcf	16	767	190	775	188	<b>773</b>	<b>189</b>	16	<b>400</b>	<b>364</b>	408	358	398	366
445.gobmk	16	738	227	742	226	<b>739</b>	<b>227</b>	16	658	255	657	255	<b>657</b>	<b>255</b>
456.hammer	16	421	354	419	356	<b>419</b>	<b>356</b>	16	344	434	<b>344</b>	<b>434</b>	345	433
458.sjeng	16	884	219	918	211	<b>885</b>	<b>219</b>	16	<b>873</b>	<b>222</b>	873	222	872	222
462.libquantum	16	382	869	<b>381</b>	<b>869</b>	381	870	16	<b>388</b>	<b>855</b>	391	848	386	858
464.h264ref	16	<b>1140</b>	<b>311</b>	1139	311	1146	309	16	1033	343	1024	346	<b>1028</b>	<b>344</b>
471.omnetpp	16	606	165	604	166	<b>604</b>	<b>166</b>	16	606	165	604	166	<b>604</b>	<b>166</b>
473.astar	16	728	154	732	153	<b>729</b>	<b>154</b>	16	587	191	589	191	<b>588</b>	<b>191</b>
483.xalancbmk	16	393	281	<b>394</b>	<b>280</b>	395	280	16	<b>373</b>	<b>296</b>	372	297	374	295

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

Fan Speed set to Full Speed in BIOS Setup.  
The system uses a Supermicro H8DGU-F motherboard.

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-2022G-URF,  
AMD Opteron 6134

SPECint\_rate2006 = 285

SPECint\_rate\_base2006 = 247

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -mso -Ofast -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on  
-CG:cmp\_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-2022G-URF,  
AMD Opteron 6134

SPECint\_rate2006 = 285

SPECint\_rate\_base2006 = 247

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
 -LNO:ignore\_feedback=off -CG:p2align=on  
 -CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:local\_sched\_alg=1 -CG:cflow=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
 -HP:bdt=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-2022G-URF,  
AMD Opteron 6134

SPECint\_rate2006 = 285

SPECint\_rate\_base2006 = 247

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-2022G-URF,  
AMD Opteron 6134

SPECint\_rate2006 = 285

SPECint\_rate\_base2006 = 247

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Dec-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Jul-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 16:56:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 January 2011.