



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint<sup>®</sup>\_rate2006 = 126

PRIMERGY TX200 S6, Intel Xeon E5603, 1.60 GHz

### SPECint\_rate\_base2006 = 118

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2011

Hardware Availability: Jul-2010

Software Availability: Nov-2010

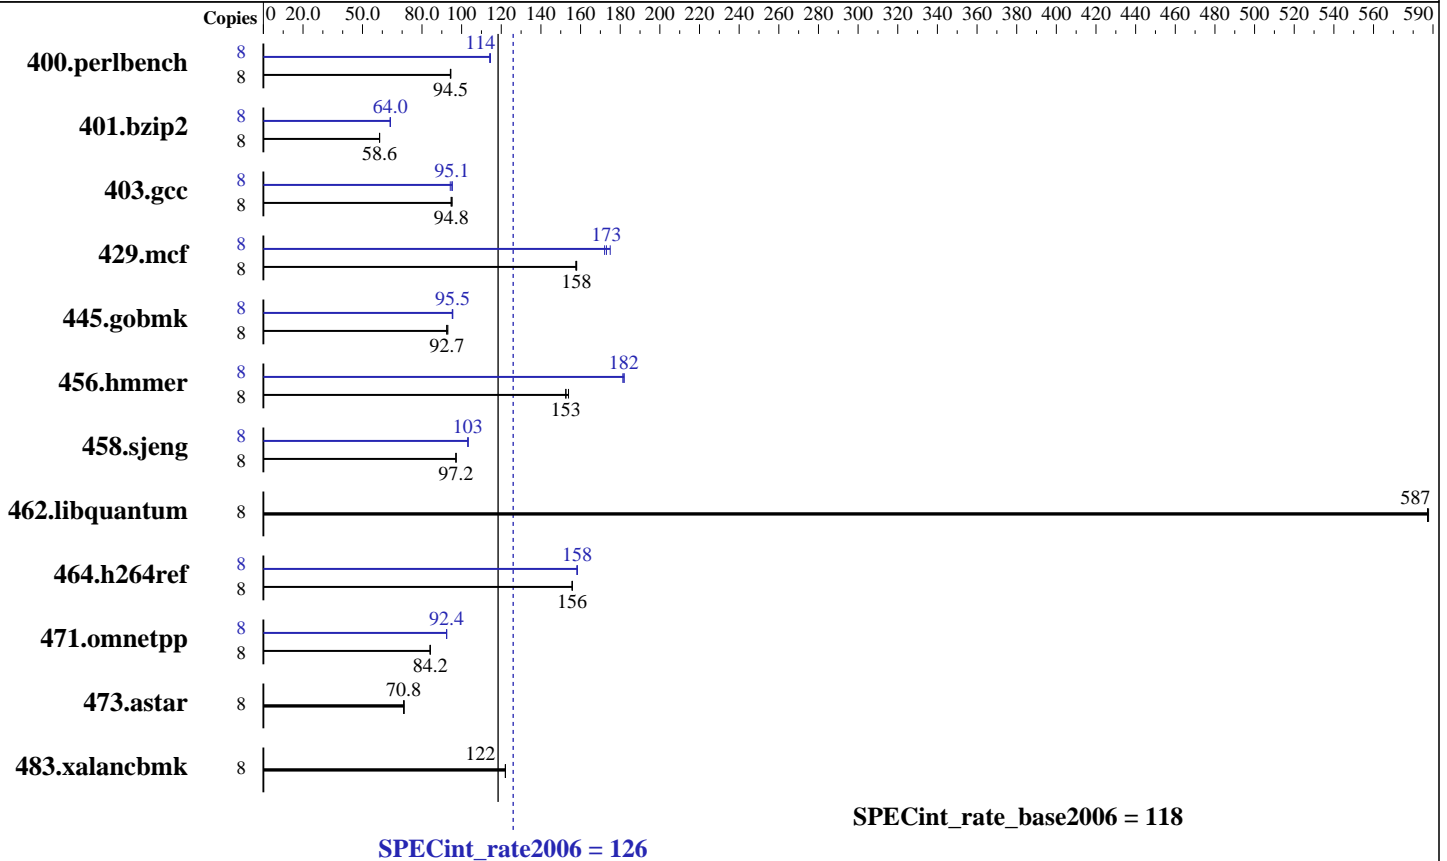

### Hardware

CPU Name: Intel Xeon E5603  
 CPU Characteristics: 1600  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz and CL7)  
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
 Other Hardware: --

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.0.082 Build 20101006  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 126

PRIMERGY TX200 S6, Intel Xeon E5603, 1.60 GHz

SPECint\_rate\_base2006 = 118

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jan-2011  
Hardware Availability: Jul-2010  
Software Availability: Nov-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	829	94.3	827	94.5	<u>827</u>	<u>94.5</u>	8	682	115	<u>684</u>	<u>114</u>	684	114
401.bzip2	8	1316	58.7	1318	58.6	<u>1317</u>	<u>58.6</u>	8	1206	64.0	<u>1206</u>	<u>64.0</u>	1206	64.0
403.gcc	8	676	95.2	<u>679</u>	<u>94.8</u>	680	94.7	8	<u>677</u>	<u>95.1</u>	676	95.3	683	94.3
429.mcf	8	462	158	463	158	<u>462</u>	<u>158</u>	8	424	172	<u>422</u>	<u>173</u>	417	175
445.gobmk	8	902	93.1	908	92.4	<u>905</u>	<u>92.7</u>	8	<u>879</u>	<u>95.5</u>	881	95.3	879	95.5
456.hammer	8	<u>489</u>	<u>153</u>	485	154	489	153	8	412	181	410	182	<u>410</u>	<u>182</u>
458.sjeng	8	997	97.1	996	97.2	<u>996</u>	<u>97.2</u>	8	938	103	937	103	<u>938</u>	<u>103</u>
462.libquantum	8	282	587	<u>282</u>	<u>587</u>	282	588	8	282	587	<u>282</u>	<u>587</u>	282	588
464.h264ref	8	<u>1136</u>	<u>156</u>	1137	156	1136	156	8	1118	158	1119	158	<u>1118</u>	<u>158</u>
471.omnetpp	8	594	84.1	<u>594</u>	<u>84.2</u>	594	84.2	8	<u>541</u>	<u>92.4</u>	541	92.4	541	92.4
473.astar	8	794	70.8	791	71.0	<u>793</u>	<u>70.8</u>	8	794	70.8	791	71.0	<u>793</u>	<u>70.8</u>
483.xalancbmk	8	<u>452</u>	<u>122</u>	452	122	452	122	8	<u>452</u>	<u>122</u>	452	122	452	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
Large pages were not enabled for this run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 126

PRIMERGY TX200 S6, Intel Xeon E5603, 1.60 GHz

SPECint\_rate\_base2006 = 118

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jan-2011  
Hardware Availability: Jul-2010  
Software Availability: Nov-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 126

PRIMERGY TX200 S6, Intel Xeon E5603, 1.60 GHz

SPECint\_rate\_base2006 = 118

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2011

Hardware Availability: Jul-2010

Software Availability: Nov-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
 -B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 126**

PRIMERGY TX200 S6, Intel Xeon E5603, 1.60 GHz

**SPECint\_rate\_base2006 = 118**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jan-2011

**Hardware Availability:** Jul-2010

**Software Availability:** Nov-2010

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 17:05:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 February 2011.