



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®_rate2006 = 412

BladeSymphony BS2000 (Intel Xeon X5690)

SPECint_rate_base2006 = 386

CPU2006 license: 35


Test date: Mar-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2011

Tested by: HITACHI

Software Availability: Jan-2011

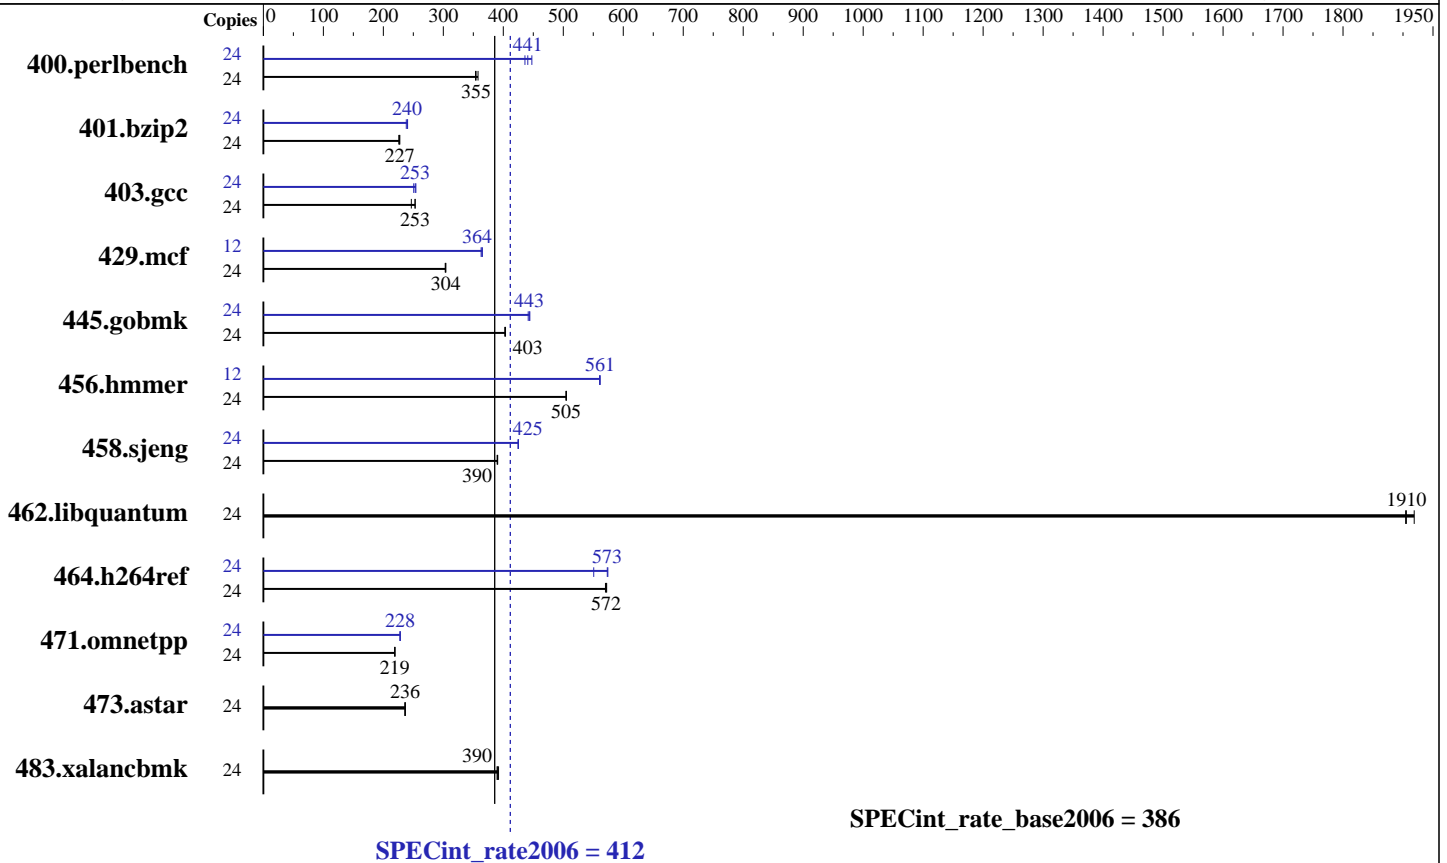

Hardware

CPU Name: Intel Xeon X5690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3466
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1333 MHz)
 Disk Subsystem: 2 x 146 GB 10000 rpm SAS RAID1 configuration
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86_64
 Compiler: Intel C++ Compiler XE for Linux Version 12.0.2.137 Build 20110112
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 412

BladeSymphony BS2000 (Intel Xeon X5690)

SPECint_rate_base2006 = 386

CPU2006 license: 35

Test date: Mar-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2011

Tested by: HITACHI

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<u>661</u>	<u>355</u>	663	354	655	358	24	538	436	<u>532</u>	<u>441</u>	524	448
401.bzip2	24	<u>1019</u>	<u>227</u>	1026	226	1019	227	24	972	238	963	240	<u>965</u>	<u>240</u>
403.gcc	24	783	247	763	253	<u>764</u>	<u>253</u>	24	771	251	760	254	<u>763</u>	<u>253</u>
429.mcf	24	722	303	720	304	<u>720</u>	<u>304</u>	12	300	365	301	363	<u>300</u>	<u>364</u>
445.gobmk	24	624	404	<u>625</u>	<u>403</u>	625	403	24	570	442	567	444	<u>568</u>	<u>443</u>
456.hammer	24	<u>444</u>	<u>505</u>	444	505	443	505	12	<u>199</u>	<u>561</u>	199	561	200	561
458.sjeng	24	<u>744</u>	<u>390</u>	744	391	745	390	24	684	425	683	425	<u>683</u>	<u>425</u>
462.libquantum	24	261	1900	<u>261</u>	<u>1910</u>	259	1920	24	261	1900	<u>261</u>	<u>1910</u>	259	1920
464.h264ref	24	928	572	931	570	<u>929</u>	<u>572</u>	24	925	574	<u>926</u>	<u>573</u>	964	551
471.omnetpp	24	685	219	<u>684</u>	<u>219</u>	684	219	24	658	228	<u>658</u>	<u>228</u>	658	228
473.astar	24	<u>713</u>	<u>236</u>	712	237	714	236	24	<u>713</u>	<u>236</u>	712	237	714	236
483.xalancbmk	24	422	392	425	390	<u>424</u>	<u>390</u>	24	422	392	425	390	<u>424</u>	<u>390</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'/usr/bin/numactl' used to bind processes to CPUs

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so

Platform Notes

BIOS Settings:
Data Reuse Optimization = Disabled

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 412

BladeSymphony BS2000 (Intel Xeon X5690)

SPECint_rate_base2006 = 386

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/bsc/smartheap/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 412

BladeSymphony BS2000 (Intel Xeon X5690)

SPECint_rate_base2006 = 386

CPU2006 license: 35

Test date: Mar-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2011

Tested by: HITACHI

Software Availability: Jan-2011

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/bsc/smartheap/lib -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 412

BladeSymphony BS2000 (Intel Xeon X5690)

SPECint_rate_base2006 = 386

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:21:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 April 2011.