



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®\_rate2006 = 308

### IBM System x3650 M3 (Intel Xeon X5672)

SPECint\_rate\_base2006 = 289

CPU2006 license: 11


Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

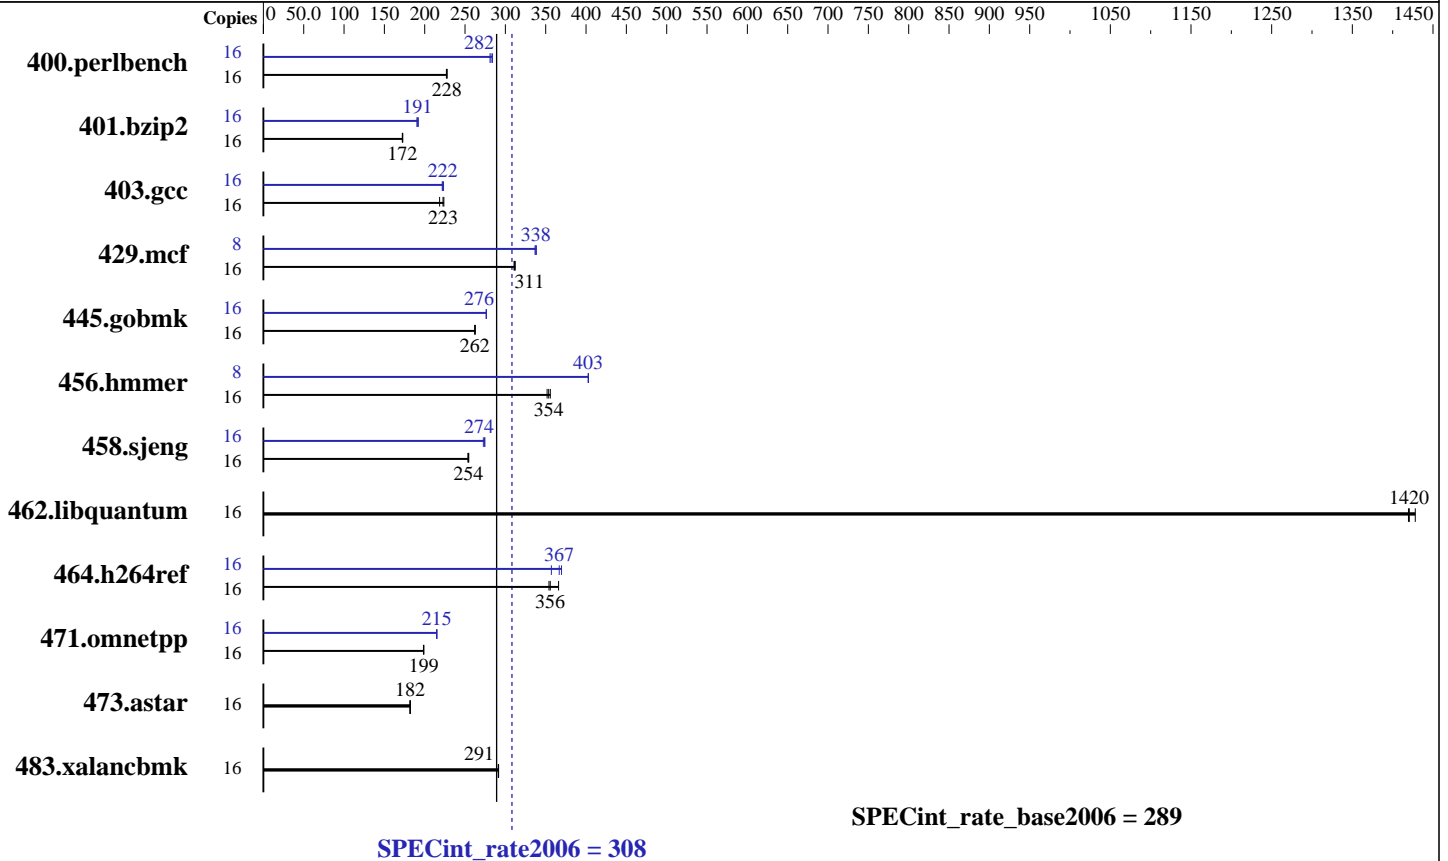

### Hardware

CPU Name: Intel Xeon X5672  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 308

IBM System x3650 M3 (Intel Xeon X5672)

SPECint\_rate\_base2006 = 289

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	689	227	687	228	<b>687</b>	<b>228</b>	16	556	281	550	284	<b>554</b>	<b>282</b>
401.bzip2	16	<b>895</b>	<b>172</b>	893	173	896	172	16	804	192	811	190	<b>809</b>	<b>191</b>
403.gcc	16	<b>578</b>	<b>223</b>	576	224	590	218	16	581	222	<b>579</b>	<b>222</b>	577	223
429.mcf	16	467	312	470	311	<b>469</b>	<b>311</b>	8	<b>216</b>	<b>338</b>	216	338	217	337
445.gobmk	16	641	262	<b>640</b>	<b>262</b>	639	263	16	607	277	<b>607</b>	<b>276</b>	608	276
456.hammer	16	420	356	<b>422</b>	<b>354</b>	424	352	8	<b>185</b>	<b>403</b>	185	403	185	403
458.sjeng	16	760	255	764	254	<b>762</b>	<b>254</b>	16	<b>706</b>	<b>274</b>	710	273	705	274
462.libquantum	16	<b>233</b>	<b>1420</b>	232	1430	234	1420	16	<b>233</b>	<b>1420</b>	232	1430	234	1420
464.h264ref	16	968	366	1000	354	<b>996</b>	<b>356</b>	16	992	357	<b>965</b>	<b>367</b>	958	370
471.omnetpp	16	<b>503</b>	<b>199</b>	503	199	504	198	16	<b>465</b>	<b>215</b>	466	215	465	215
473.astar	16	616	182	618	182	<b>617</b>	<b>182</b>	16	616	182	618	182	<b>617</b>	<b>182</b>
483.xalancbmk	16	379	291	379	292	<b>379</b>	<b>291</b>	16	379	291	379	292	<b>379</b>	<b>291</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

Turbo Mode enabled in BIOS  
Turbo Boost set to Traditional in BIOS  
Power C-State enabled in BIOS  
Data Reuse disabled in BIOS  
Demand Scrub disabled in BIOS

## General Notes

Binaries compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 308

IBM System x3650 M3 (Intel Xeon X5672)

SPECint\_rate\_base2006 = 289

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 308

IBM System x3650 M3 (Intel Xeon X5672)

SPECint\_rate\_base2006 = 289

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 308

IBM System x3650 M3 (Intel Xeon X5672)

SPECint\_rate\_base2006 = 289

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:53:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 April 2011.