



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint[®]_rate2006 = 199

Servidor Itautec MX214 (Intel Xeon X5670)

SPECint_rate_base2006 = 186

CPU2006 license: 9001


Test date: Jun-2011

Test sponsor: Itautec

Hardware Availability: Apr-2011

Tested by: Itautec

Software Availability: Jan-2011

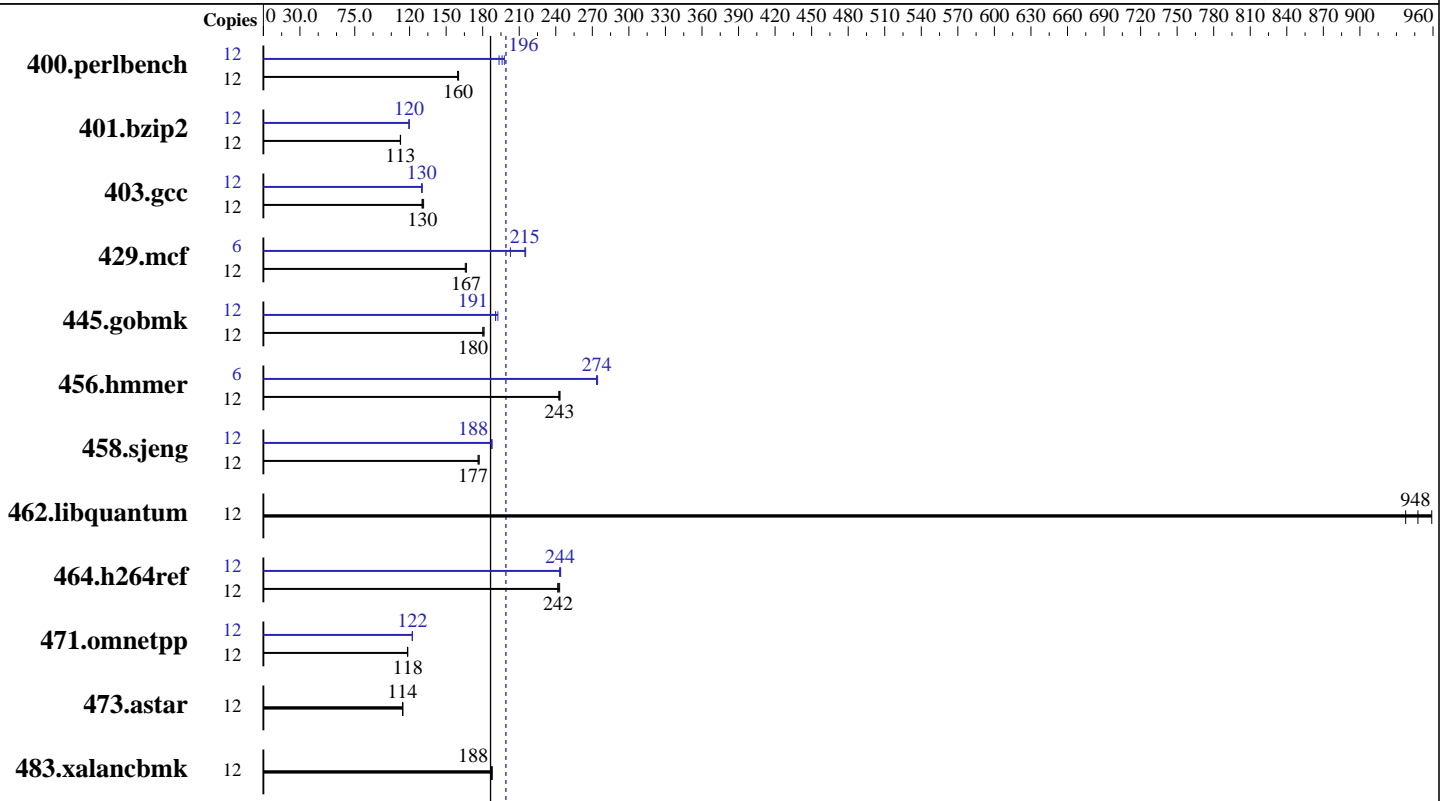

SPECint_rate2006 = 199

SPECint_rate_base2006 = 186

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.2 Build 20110112
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 199

Servidor Itaotec MX214 (Intel Xeon X5670)

SPECint_rate_base2006 = 186

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jun-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	735	159	<u>733</u>	<u>160</u>	732	160	12	606	193	593	198	<u>598</u>	<u>196</u>
401.bzip2	12	1028	113	1030	112	<u>1029</u>	<u>113</u>	12	<u>968</u>	<u>120</u>	968	120	969	120
403.gcc	12	<u>740</u>	<u>130</u>	735	132	741	130	12	<u>742</u>	<u>130</u>	741	130	744	130
429.mcf	12	<u>657</u>	<u>167</u>	660	166	657	167	6	254	215	<u>255</u>	<u>215</u>	270	203
445.gobmk	12	699	180	695	181	<u>698</u>	<u>180</u>	12	654	192	<u>660</u>	<u>191</u>	661	191
456.hammer	12	<u>460</u>	<u>243</u>	462	242	460	243	6	205	273	<u>205</u>	<u>274</u>	204	274
458.sjeng	12	820	177	824	176	<u>821</u>	<u>177</u>	12	774	188	776	187	<u>774</u>	<u>188</u>
462.libquantum	12	<u>262</u>	<u>948</u>	265	938	259	959	12	<u>262</u>	<u>948</u>	265	938	259	959
464.h264ref	12	<u>1097</u>	<u>242</u>	1099	242	1092	243	12	1088	244	1092	243	<u>1090</u>	<u>244</u>
471.omnetpp	12	633	118	634	118	<u>633</u>	<u>118</u>	12	<u>613</u>	<u>122</u>	613	122	613	122
473.astar	12	738	114	<u>737</u>	<u>114</u>	735	115	12	738	114	<u>737</u>	<u>114</u>	735	115
483.xalancbmk	12	442	187	<u>441</u>	<u>188</u>	441	188	12	442	187	<u>441</u>	<u>188</u>	441	188

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Data Reuse disabled in BIOS.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 199

Servidor Itautec MX214 (Intel Xeon X5670)

SPECint_rate_base2006 = 186

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 199

Servidor Itautec MX214 (Intel Xeon X5670)

SPECint_rate_base2006 = 186

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmarheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 199

Servidor Itautec MX214 (Intel Xeon X5670)

SPECint_rate_base2006 = 186

CPU2006 license: 9001

Test date: Jun-2011

Test sponsor: Itautec

Hardware Availability: Apr-2011

Tested by: Itautec

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:21:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 July 2011.