



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 202

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 188

CPU2006 license: 13


Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

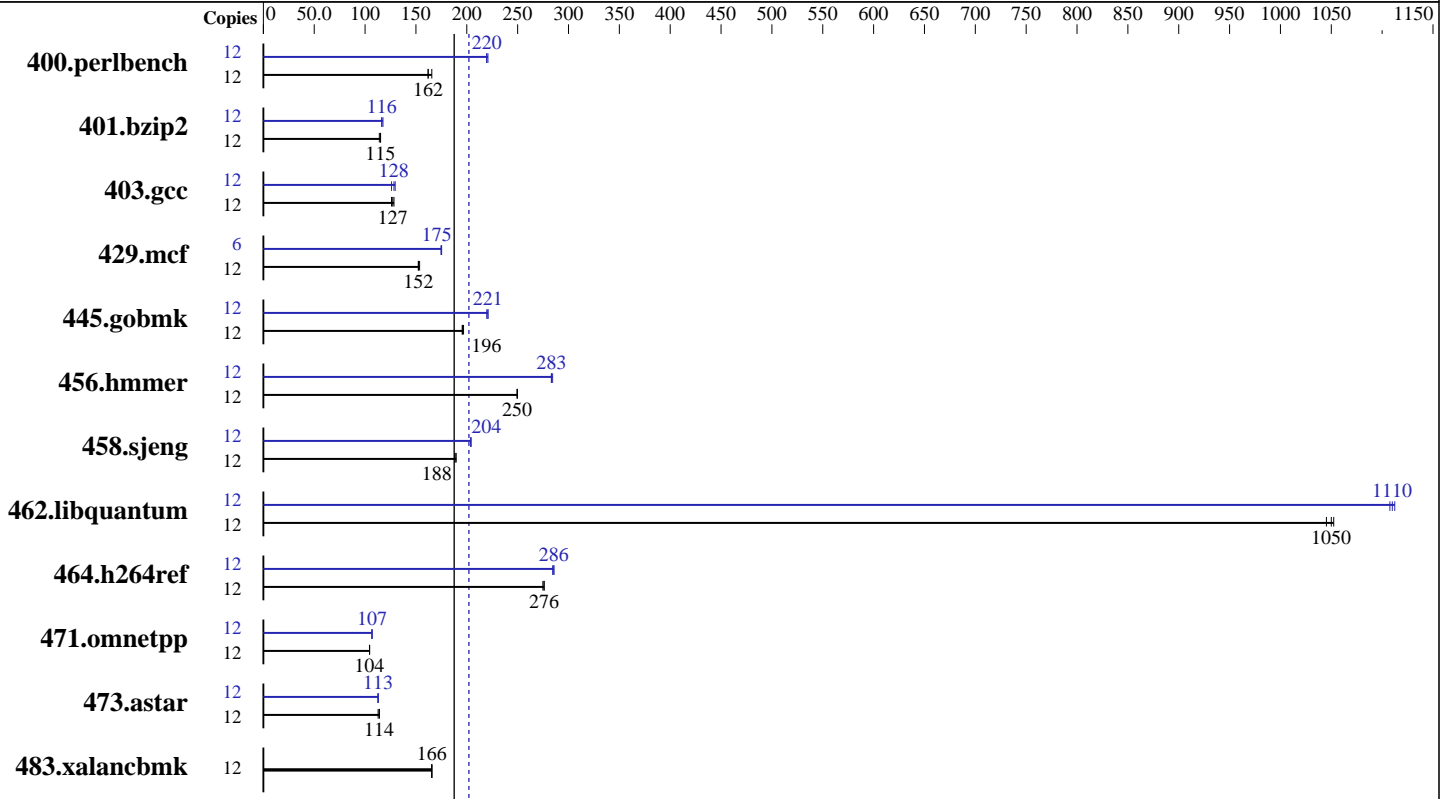

SPECint_rate2006 = 202

SPECint_rate_base2006 = 188

Hardware

CPU Name: Intel Core i7-990X
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3466
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (3 x 4 GB 2Rx8 PC3-8600U-9)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 202

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 188

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	<u>722</u>	<u>162</u>	709	166	723	162	12	532	221	<u>533</u>	<u>220</u>	533	220
401.bzip2	12	1011	114	1008	115	<u>1010</u>	<u>115</u>	12	990	118	<u>990</u>	<u>116</u>	992	116
403.gcc	12	770	126	750	128	<u>761</u>	<u>127</u>	12	<u>755</u>	<u>128</u>	765	126	747	130
429.mcf	12	<u>716</u>	<u>152</u>	716	152	710	154	6	313	175	313	175	<u>313</u>	<u>175</u>
445.gobmk	12	644	196	<u>643</u>	<u>196</u>	641	197	12	569	221	<u>570</u>	<u>221</u>	572	220
456.hammer	12	448	250	449	250	<u>448</u>	<u>250</u>	12	396	283	394	284	<u>395</u>	<u>283</u>
458.sjeng	12	<u>768</u>	<u>188</u>	769	188	768	190	12	<u>713</u>	<u>204</u>	713	204	713	204
462.libquantum	12	238	1050	<u>237</u>	<u>1050</u>	236	1050	12	224	1110	<u>224</u>	<u>1110</u>	224	1110
464.h264ref	12	<u>964</u>	<u>276</u>	964	276	967	275	12	<u>931</u>	<u>286</u>	932	284	930	286
471.omnetpp	12	718	104	<u>718</u>	<u>104</u>	718	104	12	<u>699</u>	<u>107</u>	698	107	699	107
473.astar	12	741	114	<u>742</u>	<u>114</u>	744	113	12	<u>747</u>	<u>113</u>	746	113	748	113
483.xalanbmk	12	<u>501</u>	<u>166</u>	501	166	501	166	12	<u>501</u>	<u>166</u>	501	166	501	166

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,

PC Power and Cooling 1200W power supply

System was configured with an ATI HD5770 discrete graphics card

Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

483.xalanbmk: -Qoption, cpp, --no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 202

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 188

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

C++ benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icl -Qvc9 -Qstd=c99`

`456.hmmr: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
-Qstd=c99`

C++ benchmarks (except as noted below):

`icl -Qvc9`

`473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

Peak Portability Flags

`403.gcc: -DSPEC_CPU_WIN32`

`456.hmmr: -DSPEC_CPU_P64`

`458.sjeng: -DSPEC_CPU_P64`

`462.libquantum: -DSPEC_CPU_P64`

`464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES`

`473.astar: -DSPEC_CPU_P64`

`483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 202

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 188

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlW64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 202

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 188

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

456.hmmcr: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:49:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.