



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®_rate2006 = 395

ASUS RS720Q-E6(Z8NH-D12) Server System
(Intel Xeon X5680, 3.33 GHz)

SPECint_rate_base2006 = 367

CPU2006 license: 9016


Test date: Sep-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

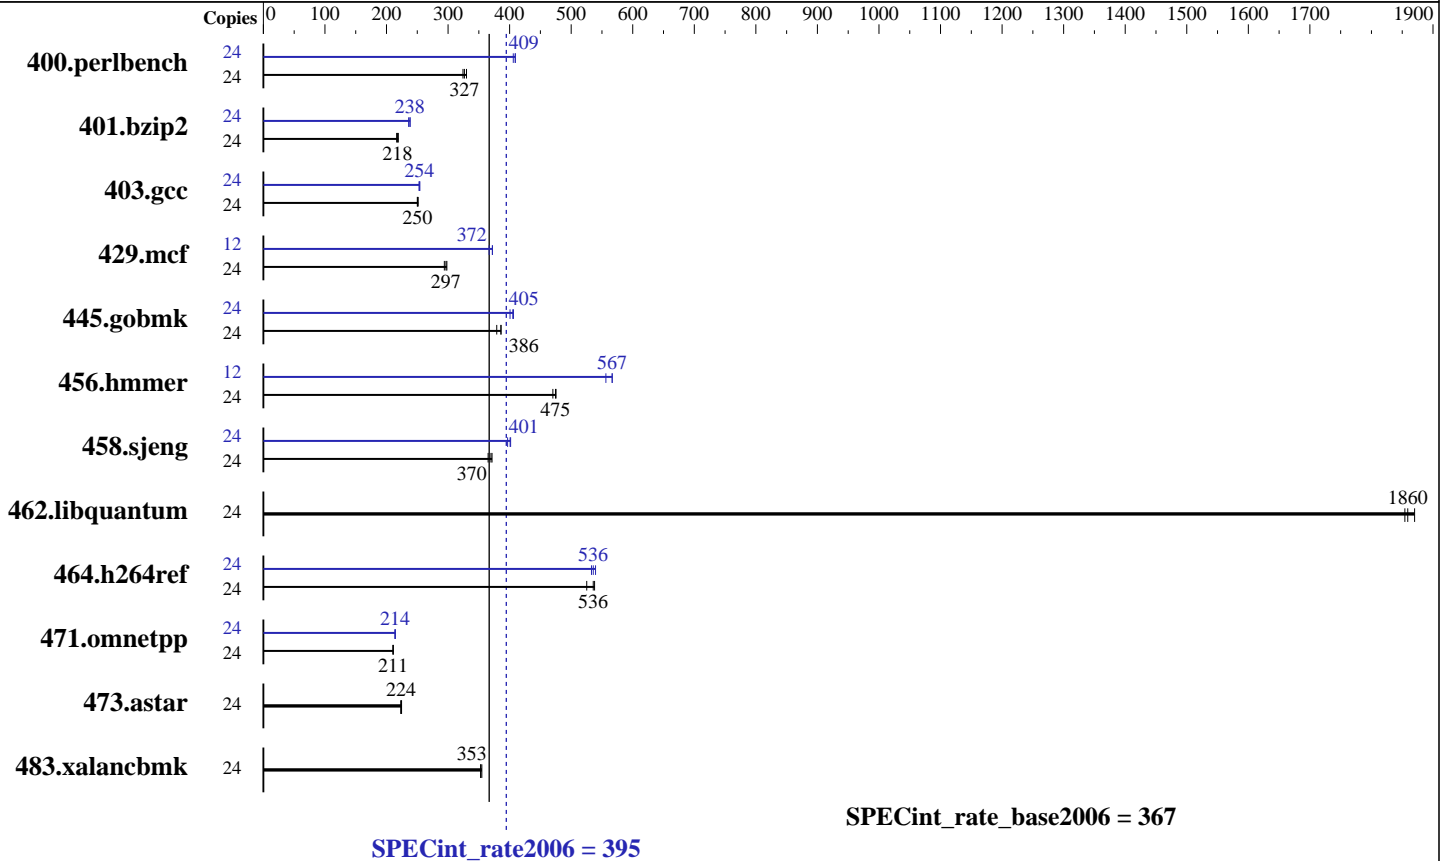

Hardware

CPU Name: Intel Xeon X5680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx8 PC3L-10600E-9, ECC)
 Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 395

ASUS RS720Q-E6(Z8NH-D12) Server System
(Intel Xeon X5680, 3.33 GHz)

SPECint_rate_base2006 = 367

CPU2006 license: 9016

Test date: Sep-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<u>718</u>	<u>327</u>	723	324	711	330	24	578	406	<u>573</u>	<u>409</u>	573	409
401.bzip2	24	1070	216	<u>1063</u>	<u>218</u>	1057	219	24	982	236	<u>973</u>	<u>238</u>	971	238
403.gcc	24	768	252	<u>771</u>	<u>250</u>	773	250	24	760	254	<u>761</u>	<u>254</u>	764	253
429.mcf	24	745	294	<u>738</u>	<u>297</u>	734	298	12	<u>294</u>	<u>372</u>	298	367	294	372
445.gobmk	24	664	379	652	386	<u>652</u>	<u>386</u>	24	628	401	620	406	<u>621</u>	<u>405</u>
456.hammer	24	<u>472</u>	<u>475</u>	476	470	471	475	12	201	556	198	567	<u>198</u>	<u>567</u>
458.sjeng	24	796	365	782	371	<u>786</u>	<u>370</u>	24	732	397	723	402	<u>725</u>	<u>401</u>
462.libquantum	24	268	1850	266	1870	<u>267</u>	<u>1860</u>	24	268	1850	266	1870	<u>267</u>	<u>1860</u>
464.h264ref	24	1011	525	<u>991</u>	<u>536</u>	987	538	24	996	533	984	540	<u>991</u>	<u>536</u>
471.omnetpp	24	711	211	712	211	<u>712</u>	<u>211</u>	24	702	214	700	214	<u>700</u>	<u>214</u>
473.astar	24	<u>753</u>	<u>224</u>	751	224	755	223	24	<u>753</u>	<u>224</u>	751	224	755	223
483.xalancbmk	24	<u>469</u>	<u>353</u>	467	355	469	353	24	<u>469</u>	<u>353</u>	467	355	469	353

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

General Notes

Binaries compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 395

ASUS RS720Q-E6(Z8NH-D12) Server System
(Intel Xeon X5680, 3.33 GHz)

SPECint_rate_base2006 = 367

CPU2006 license: 9016

Test date: Sep-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 395

ASUS RS720Q-E6(Z8NH-D12) Server System
(Intel Xeon X5680, 3.33 GHz)

SPECint_rate_base2006 = 367

CPU2006 license: 9016

Test date: Sep-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Peak Portability Flags (Continued)

456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 395

ASUS RS720Q-E6(Z8NH-D12) Server System
(Intel Xeon X5680, 3.33 GHz)

SPECint_rate_base2006 = 367

CPU2006 license: 9016

Test date: Sep-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Aug-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:47:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 October 2011.