



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815
(AMD Opteron 6272, 2.10 GHz)

SPECint®_rate2006 = 909

SPECint_rate_base2006 = 792

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

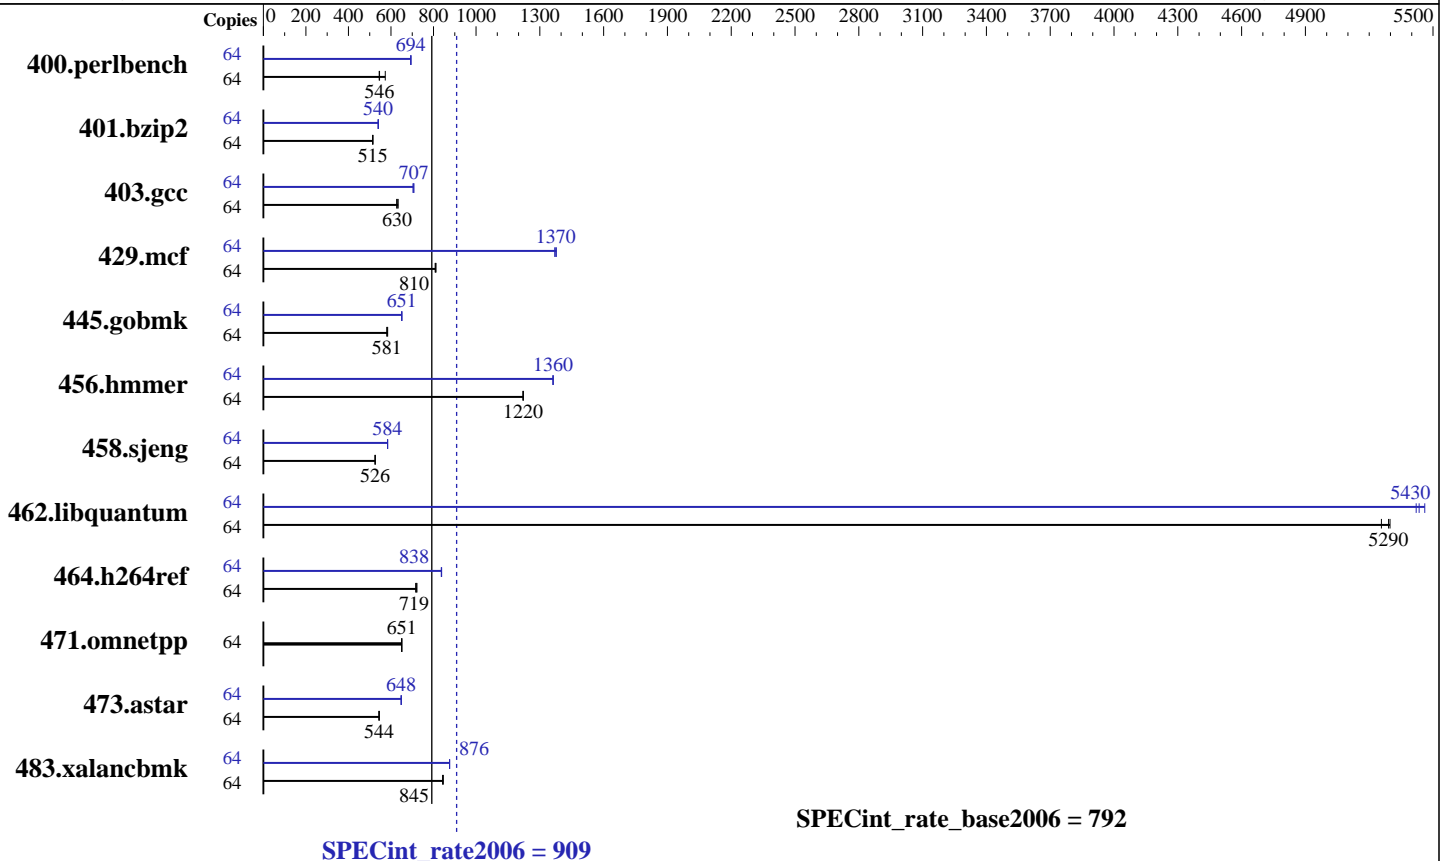

Hardware

CPU Name: AMD Opteron 6272
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 2 x 160 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815
(AMD Opteron 6272, 2.10 GHz)

SPECint_rate2006 = 909

SPECint_rate_base2006 = 792

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1148	545	1145	546	1091	573	64	901	694	901	694	902	693
401.bzip2	64	1200	515	1202	514	1199	515	64	1146	539	1141	541	1143	540
403.gcc	64	813	634	818	630	822	627	64	732	703	728	708	729	707
429.mcf	64	719	812	723	808	721	810	64	424	1380	425	1370	426	1370
445.gobmk	64	1149	584	1156	581	1155	581	64	1032	651	1030	652	1032	650
456.hammer	64	489	1220	489	1220	489	1220	64	438	1360	438	1360	439	1360
458.sjeng	64	1474	525	1473	526	1473	526	64	1326	584	1326	584	1325	584
462.libquantum	64	252	5260	250	5300	251	5290	64	244	5430	243	5460	245	5420
464.h264ref	64	1969	719	1961	722	1978	716	64	1690	838	1693	837	1691	838
471.omnetpp	64	615	651	615	651	615	651	64	615	651	615	651	615	651
473.astar	64	827	543	826	544	824	545	64	693	648	693	648	693	648
483.xalancbmk	64	522	845	524	843	523	845	64	504	876	504	876	504	876

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1
Huge pages, transparent Huge pages, and space randomization is controlled with the following settings:
echo 57344 > /proc/sys/vm/nr_hugepages
mount -t hugetlbfs nodev /mnt/hugepages
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
echo 0 > /proc/sys/kernel/randomize_va_space=0

Platform Notes

'Power Management' set to 'Maximum Performance' in BIOS

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815
(AMD Opteron 6272, 2.10 GHz)

SPECint_rate2006 = 909

SPECint_rate_base2006 = 792

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

General Notes (Continued)

<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peek=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815
(AMD Opteron 6272, 2.10 GHz)

SPECint_rate2006 = 909

SPECint_rate_base2006 = 792

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
-IPA:plimit=20000 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
-CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
-OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
-HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
-HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
-INLINE:aggressive=on -CG:gcm=off
-GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
-OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1
-LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
-OPT:alias=disjoint -OPT:unroll_times_max=16
-OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
-HP:bd=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 909

PowerEdge R815
(AMD Opteron 6272, 2.10 GHz)

SPECint_rate_base2006 = 792

CPU2006 license: 55

Test date: Nov-2011

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.html>
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.xml>
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815
(AMD Opteron 6272, 2.10 GHz)

SPECint_rate2006 = 909

SPECint_rate_base2006 = 792

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:16:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 December 2011.