



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®\_rate2006 = 169

Servidor Itaotec MX224 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 161

CPU2006 license: 9001


Test date: Dec-2011

Test sponsor: Itaotec

Hardware Availability: Jul-2011

Tested by: Itaotec

Software Availability: Aug-2011

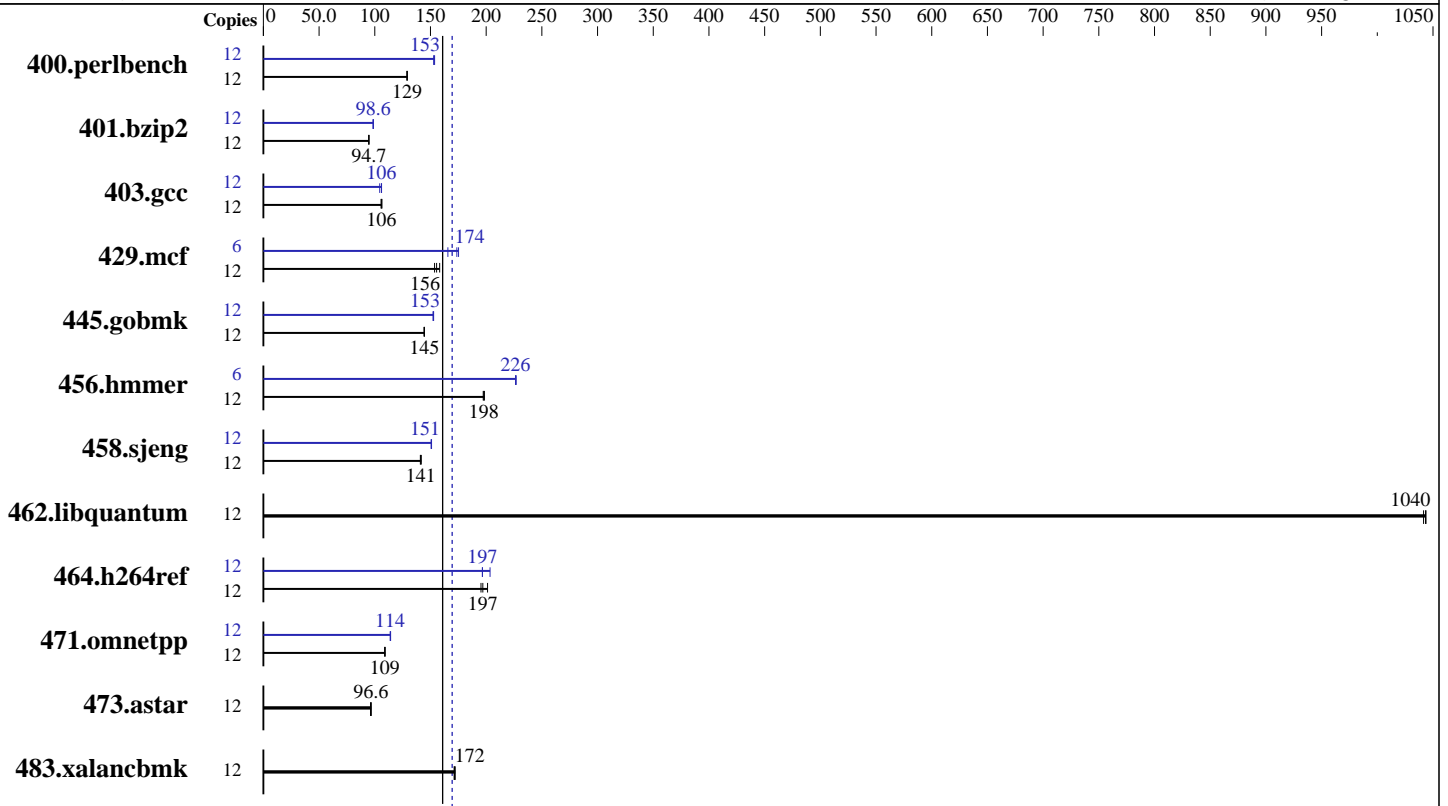

SPECint\_rate2006 = 169

SPECint\_rate\_base2006 = 161

## Hardware

CPU Name: Intel Xeon E5649  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 500 GB SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20110811  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 169

Servidor Itaotec MX224 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 161

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	910	129	<u>909</u>	<u>129</u>	907	129	12	763	154	<u>765</u>	<u>153</u>	766	153
401.bzip2	12	1222	94.7	<u>1223</u>	<u>94.7</u>	1223	94.7	12	<u>1175</u>	<u>98.6</u>	1172	98.8	1175	98.5
403.gcc	12	914	106	<u>912</u>	<u>106</u>	907	106	12	911	106	925	104	<u>911</u>	<u>106</u>
429.mcf	12	712	154	692	158	<u>704</u>	<u>156</u>	6	330	166	312	175	<u>315</u>	<u>174</u>
445.gobmk	12	873	144	871	145	<u>871</u>	<u>145</u>	12	826	152	<u>825</u>	<u>153</u>	824	153
456.hammer	12	<u>566</u>	<u>198</u>	564	198	567	197	6	247	226	<u>247</u>	<u>226</u>	247	227
458.sjeng	12	<u>1028</u>	<u>141</u>	1025	142	1030	141	12	<u>963</u>	<u>151</u>	962	151	964	151
462.libquantum	12	<u>238</u>	<u>1040</u>	238	1040	239	1040	12	<u>238</u>	<u>1040</u>	238	1040	239	1040
464.h264ref	12	1320	201	1359	195	<u>1348</u>	<u>197</u>	12	1351	197	1305	203	<u>1350</u>	<u>197</u>
471.omnetpp	12	<u>688</u>	<u>109</u>	689	109	686	109	12	657	114	<u>658</u>	<u>114</u>	658	114
473.astar	12	871	96.8	<u>872</u>	<u>96.6</u>	876	96.2	12	871	96.8	<u>872</u>	<u>96.6</u>	876	96.2
483.xalancbmk	12	481	172	<u>483</u>	<u>172</u>	484	171	12	481	172	<u>483</u>	<u>172</u>	484	171

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.

## General Notes

This result was measured on the Servidor Itaotec MX224.  
The Servidor Itaotec MX203+, Servidor Itaotec MX223+ and the Servidor Itaotec MX224 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 169

Servidor Itaotec MX224 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 161

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 169

Servidor Itautec MX224 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 161

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 169

Servidor Itaotec MX224 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 161

CPU2006 license: 9001

Test date: Dec-2011

Test sponsor: Itaotec

Hardware Availability: Jul-2011

Tested by: Itaotec

Software Availability: Aug-2011

## Peak Optimization Flags (Continued)

471.omnetpp (continued):

`-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap`

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 03:15:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 January 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5