



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3755 M3  
(AMD Opteron 6262 HE)

SPECint®\_rate2006 = 367

SPECint\_rate\_base2006 = 326

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2012

Hardware Availability: Dec-2011

Software Availability: Jul-2011

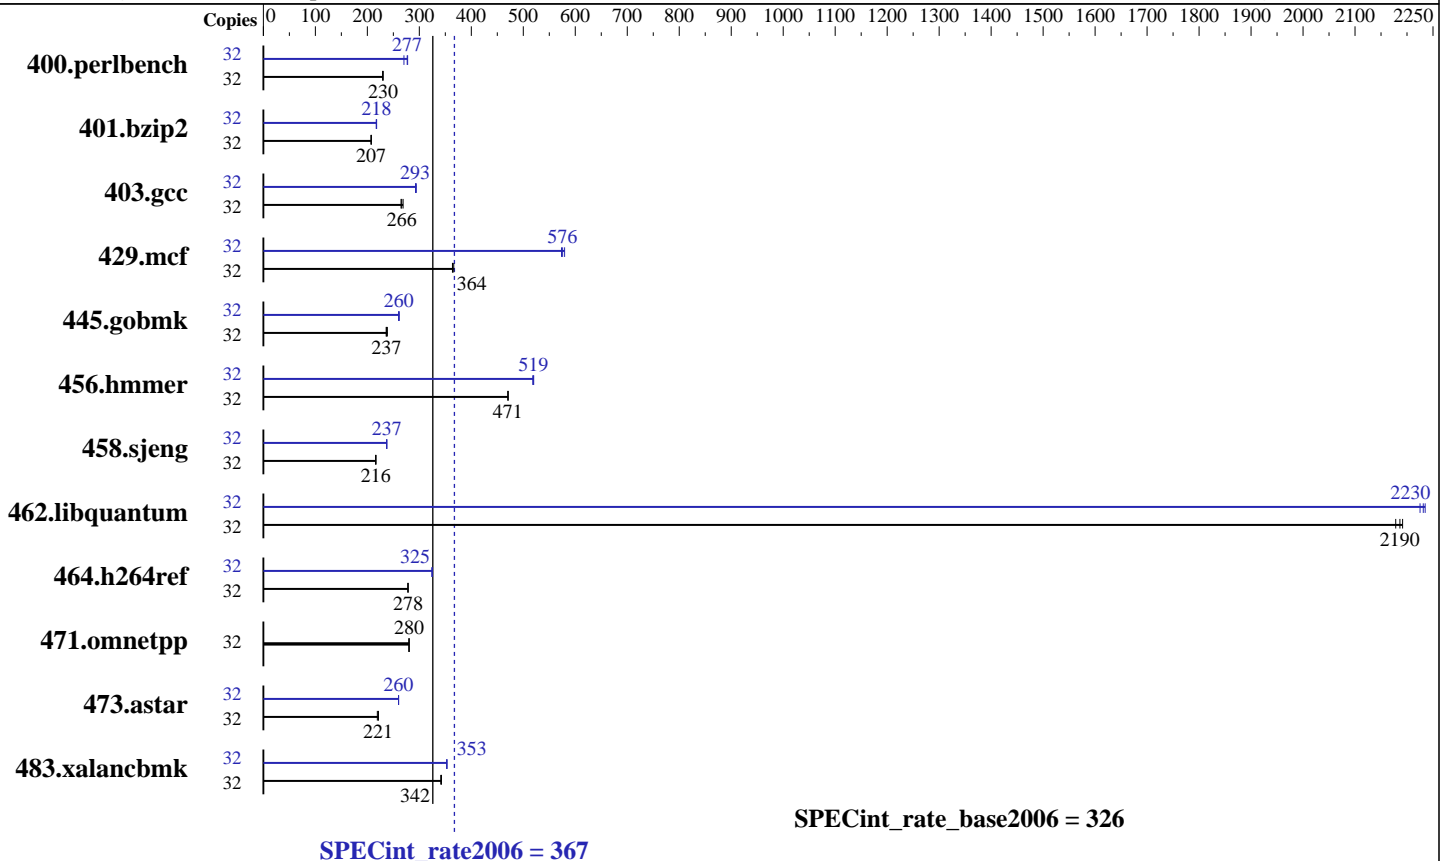

### Hardware

CPU Name: AMD Opteron 6262 HE  
 CPU Characteristics: AMD Turbo CORE technology up to 2.90 GHz  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 600 GB SATA, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1,  
Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3755 M3  
(AMD Opteron 6262 HE)

SPECint\_rate2006 = 367

SPECint\_rate\_base2006 = 326

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Mar-2012  
Hardware Availability: Dec-2011  
Software Availability: Jul-2011

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	32	1363	229	<u>1359</u>	<u>230</u>	1358	230	32	1156	270	<u>1130</u>	<u>277</u>	1127	278		
401.bzip2	32	1492	207	<u>1488</u>	<u>207</u>	1486	208	32	<u>1419</u>	<u>218</u>	1422	217	1417	218		
403.gcc	32	<u>968</u>	<u>266</u>	958	269	973	265	32	876	294	880	293	<u>879</u>	<u>293</u>		
429.mcf	32	802	364	797	366	<u>802</u>	<u>364</u>	32	504	579	509	574	<u>507</u>	<u>576</u>		
445.gobmk	32	1407	239	<u>1419</u>	<u>237</u>	1420	236	32	1284	261	<u>1289</u>	<u>260</u>	1290	260		
456.hammer	32	635	470	<u>635</u>	<u>471</u>	634	471	32	<u>575</u>	<u>519</u>	576	518	574	520		
458.sjeng	32	1794	216	1789	216	<u>1789</u>	<u>216</u>	32	1632	237	<u>1632</u>	<u>237</u>	1631	237		
462.libquantum	32	304	2180	<u>303</u>	<u>2190</u>	303	2190	32	297	2230	298	2230	<u>297</u>	<u>2230</u>		
464.h264ref	32	<u>2545</u>	<u>278</u>	2548	278	2543	278	32	2181	325	<u>2181</u>	<u>325</u>	2183	324		
471.omnetpp	32	713	280	<u>714</u>	<u>280</u>	714	280	32	713	280	<u>714</u>	<u>280</u>	714	280		
473.astar	32	1025	219	1016	221	<u>1016</u>	<u>221</u>	32	864	260	864	260	<u>864</u>	<u>260</u>		
483.xalancbmk	32	647	341	<u>645</u>	<u>342</u>	645	343	32	625	353	626	353	<u>626</u>	<u>353</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

BIOS settings:  
Operating Mode set to Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/root/speccpu-rate-rev1104B1/amd1104-rate-libs-revB/32:/root/speccpu-rate-rev1104B1/amd1104-rate-libs-revB/64"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 367**

IBM System x3755 M3  
(AMD Opteron 6262 HE)

**SPECint\_rate\_base2006 = 326**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Mar-2012  
**Hardware Availability:** Dec-2011  
**Software Availability:** Jul-2011

## General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
  opencc  
  
C++ benchmarks:  
  openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
  -march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
  -IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
  -LNO:prefetch=2  
  
C++ benchmarks:  
  -march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
  -D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
  opencc  
  
C++ benchmarks:  
  openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 367**

IBM System x3755 M3  
(AMD Opteron 6262 HE)

**SPECint\_rate\_base2006 = 326**

**CPU2006 license:** 11

**Test date:** Mar-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2011

**Tested by:** IBM Corporation

**Software Availability:** Jul-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
               -IPA:plimit=20000 -OPT:unroll_times_max=8
               -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
               -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
               -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
            -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
            -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
          -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
          -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
          -INLINE:aggressive=on -CG:gcm=off
          -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
            -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1
            -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
            -OPT:alias=disjoint -OPT:unroll_times_max=16
            -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
            -HP:bd=2m:heap=2m

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 367**

IBM System x3755 M3  
(AMD Opteron 6262 HE)

**SPECint\_rate\_base2006 = 326**

**CPU2006 license:** 11

**Test date:** Mar-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2011

**Tested by:** IBM Corporation

**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:bd=2m:heap=2m  
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=16 -LNO:prefetch=2  
-LNO:prefetch\_ahead=4 -LNO:pf2=0 -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-GRA:optimize\_boundary=on -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3755 M3  
(AMD Opteron 6262 HE)

SPECint\_rate2006 = 367

SPECint\_rate\_base2006 = 326

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Mar-2012  
**Hardware Availability:** Dec-2011  
**Software Availability:** Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Mon Sep 22 18:39:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 March 2012.