



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**MSI**

(Test Sponsor: Advanced Micro Devices)

MS-S0231,  
AMD Opteron 3250 HE

**SPECint®\_rate2006 = 68.6**

**SPECint\_rate\_base2006 = 60.9**

**CPU2006 license:** 49


**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

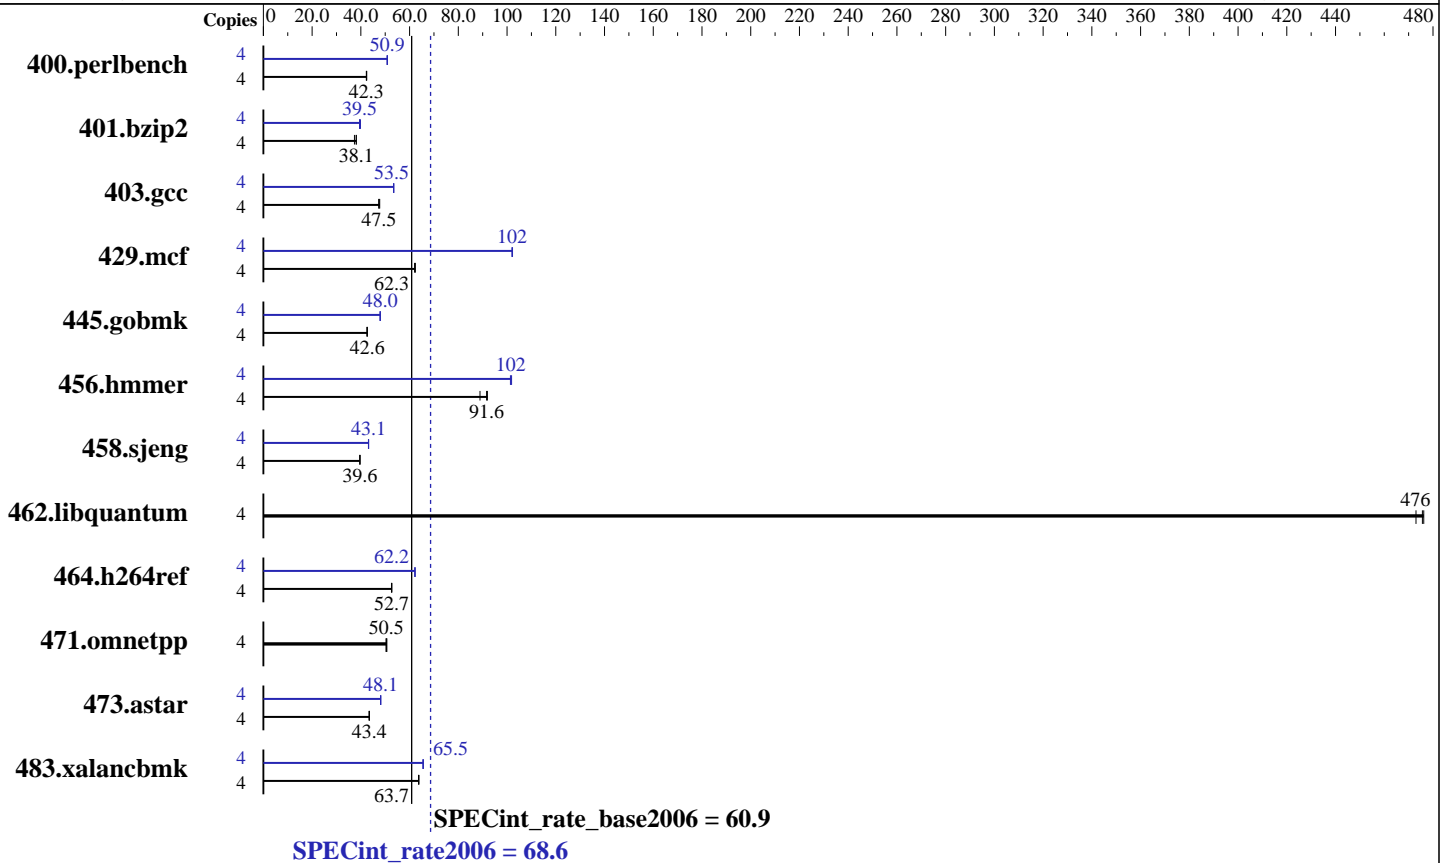

## Hardware

**CPU Name:** AMD Opteron 3250 HE  
**CPU Characteristics:** AMD Turbo CORE technology up to 3.50 GHz  
**CPU MHz:** 2500  
**FPU:** Integrated  
**CPU(s) enabled:** 4 cores, 1 chip, 4 cores/chip  
**CPU(s) orderable:** 1 chip  
**Primary Cache:** 128 KB I on chip per chip,  
64 KB shared / 2 cores;  
16 KB D on chip per core  
**Secondary Cache:** 4 MB I+D on chip per chip, 2 MB shared / 2 cores  
**L3 Cache:** 4 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 32 GB (8 x 8 GB 2Rx4 PC3-12800U-11, running at 1333MHz)  
**Disk Subsystem:** 1 x 500 GB SATA, 7200 RPM  
**Other Hardware:** None

## Software

**Operating System:** Red Hat Enterprise Linux Server release 6.2,  
Kernel 2.6.32-220.el6.x86\_64  
**Compiler:** C/C++: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)  
**Auto Parallel:** No  
**File System:** ext3  
**System State:** Run level 3 (Full multiuser with network)  
**Base Pointers:** 32/64-bit  
**Peak Pointers:** 32/64-bit  
**Other Software:** SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

MSI

(Test Sponsor: Advanced Micro Devices)

MS-S0231,  
AMD Opteron 3250 HE

SPECint\_rate2006 = 68.6

SPECint\_rate\_base2006 = 60.9

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	921	42.4	924	42.3	<u>924</u>	<u>42.3</u>	4	<u>768</u>	<u>50.9</u>	770	50.8	768	50.9
401.bzip2	4	1033	37.4	1012	38.1	<u>1013</u>	<u>38.1</u>	4	<u>977</u>	<u>39.5</u>	969	39.8	978	39.5
403.gcc	4	<u>678</u>	<u>47.5</u>	680	47.3	674	47.7	4	<u>602</u>	<u>53.5</u>	602	53.5	602	53.5
429.mcf	4	<u>586</u>	<u>62.3</u>	588	62.1	585	62.3	4	358	102	<u>357</u>	<u>102</u>	357	102
445.gobmk	4	986	42.5	<u>985</u>	<u>42.6</u>	984	42.6	4	876	47.9	874	48.0	<u>875</u>	<u>48.0</u>
456.hammer	4	<u>407</u>	<u>91.6</u>	406	91.9	420	88.9	4	366	102	<u>367</u>	<u>102</u>	368	101
458.sjeng	4	1222	39.6	1221	39.6	<u>1222</u>	<u>39.6</u>	4	1120	43.2	<u>1122</u>	<u>43.1</u>	1123	43.1
462.libquantum	4	175	473	<u>174</u>	<u>476</u>	174	476	4	175	473	<u>174</u>	<u>476</u>	174	476
464.h264ref	4	1679	52.7	1684	52.6	<u>1681</u>	<u>52.7</u>	4	<u>1422</u>	<u>62.2</u>	1422	62.3	1425	62.1
471.omnetpp	4	497	50.3	493	50.7	<u>495</u>	<u>50.5</u>	4	497	50.3	493	50.7	<u>495</u>	<u>50.5</u>
473.astar	4	645	43.5	647	43.4	<u>647</u>	<u>43.4</u>	4	584	48.1	<u>583</u>	<u>48.1</u>	583	48.2
483.xalancbmk	4	<u>433</u>	<u>63.7</u>	432	63.8	433	63.7	4	<u>421</u>	<u>65.5</u>	420	65.7	421	65.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=3584 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/root/work/cpu2006v1.2/amd1104-rate-libs-revC/32:/root/work/cpu2006v1.2/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**MSI**

(Test Sponsor: Advanced Micro Devices)

MS-S0231,  
AMD Opteron 3250 HE

**SPECint\_rate2006 = 68.6**

**SPECint\_rate\_base2006 = 60.9**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**MSI**

(Test Sponsor: Advanced Micro Devices)

MS-S0231,  
AMD Opteron 3250 HE

**SPECint\_rate2006 = 68.6**

**SPECint\_rate\_base2006 = 60.9**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
 -IPA:plimit=20000 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
 -CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
 -OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
 -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on  
 -GRA:prioritize\_by\_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1  
 -LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=16  
 -OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
 -HP:bd=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**MSI**

(Test Sponsor: Advanced Micro Devices)

MS-S0231,  
AMD Opteron 3250 HE

**SPECint\_rate2006 = 68.6**

**SPECint\_rate\_base2006 = 60.9**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:heap=2m:bd=2m  
-WOPT:sib=on

462.libquantum: basepeak = yes

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**MSI**

(Test Sponsor: Advanced Micro Devices)

MS-S0231,  
AMD Opteron 3250 HE

**SPECint\_rate2006 = 68.6**

**SPECint\_rate\_base2006 = 60.9**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 05:35:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.