



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 368

Express5800/R120d-2E (Intel Xeon E5-2420)

SPECint_rate_base2006 = 352

CPU2006 license: 9006


Test date: Apr-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

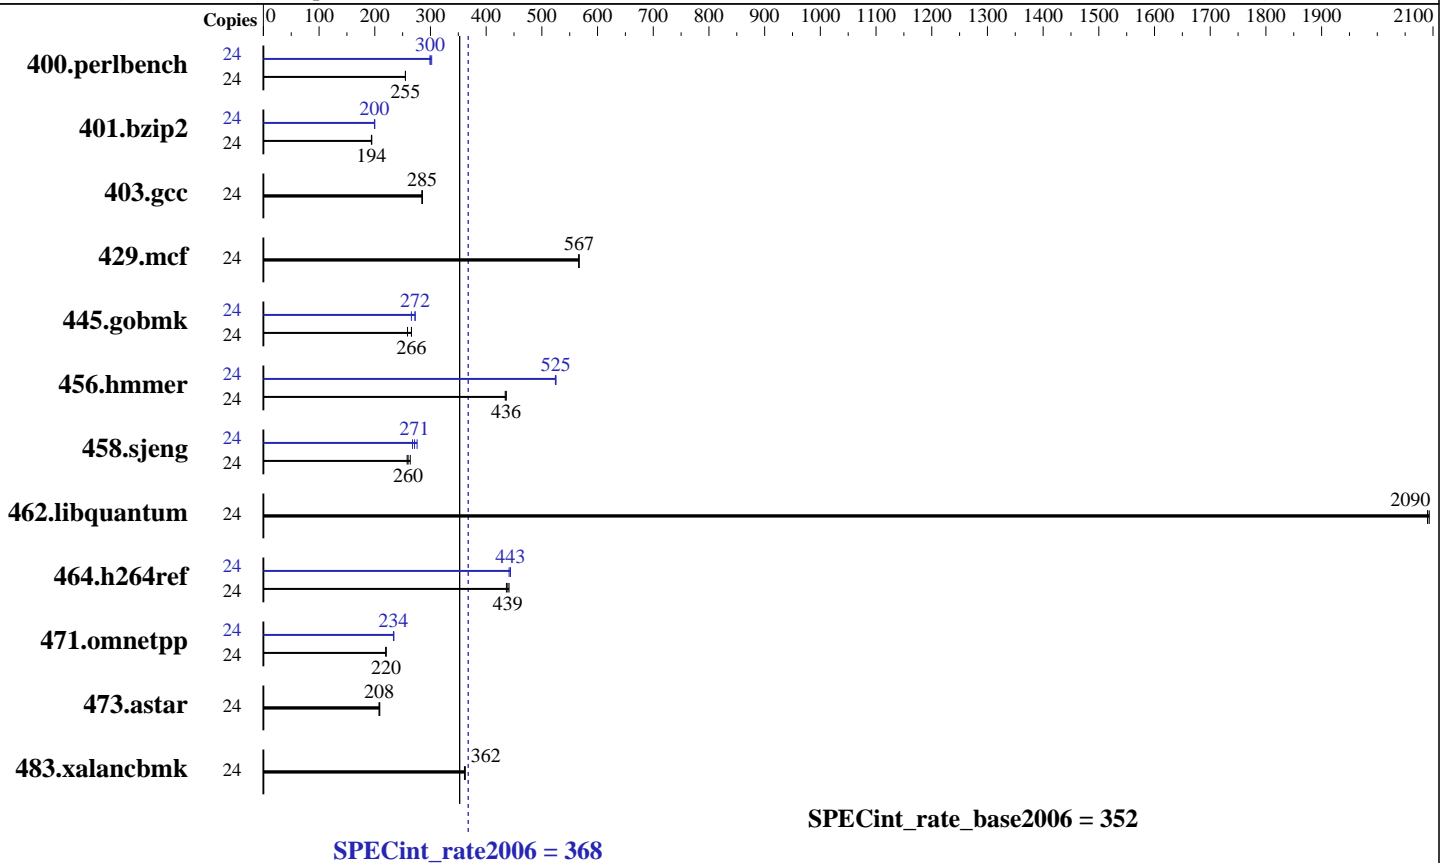

Hardware

CPU Name: Intel Xeon E5-2420
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 368

Express5800/R120d-2E (Intel Xeon E5-2420)

SPECint_rate_base2006 = 352

CPU2006 license: 9006

Test date: Apr-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	919	255	<u>919</u>	<u>255</u>	919	255	24	776	302	784	299	<u>783</u>	<u>300</u>
401.bzip2	24	<u>1191</u>	<u>194</u>	1194	194	1191	194	24	1162	199	1158	200	<u>1160</u>	<u>200</u>
403.gcc	24	679	285	<u>678</u>	<u>285</u>	677	285	24	679	285	<u>678</u>	<u>285</u>	677	285
429.mcf	24	<u>386</u>	<u>567</u>	387	566	386	567	24	<u>386</u>	<u>567</u>	387	566	386	567
445.gobmk	24	<u>947</u>	<u>266</u>	973	259	947	266	24	924	272	947	266	<u>924</u>	<u>272</u>
456.hammer	24	514	436	<u>514</u>	<u>436</u>	516	434	24	426	525	<u>426</u>	<u>525</u>	427	524
458.sjeng	24	1125	258	<u>1118</u>	<u>260</u>	1101	264	24	1085	268	1052	276	<u>1070</u>	<u>271</u>
462.libquantum	24	238	2090	238	2090	<u>238</u>	<u>2090</u>	24	238	2090	238	2090	<u>238</u>	<u>2090</u>
464.h264ref	24	<u>1210</u>	<u>439</u>	1217	436	1204	441	24	1204	441	<u>1198</u>	<u>443</u>	1197	444
471.omnetpp	24	683	220	681	220	<u>681</u>	<u>220</u>	24	642	234	640	234	<u>642</u>	<u>234</u>
473.astar	24	<u>810</u>	<u>208</u>	811	208	806	209	24	<u>810</u>	<u>208</u>	811	208	806	209
483.xalancbmk	24	457	362	<u>457</u>	<u>362</u>	459	361	24	457	362	<u>457</u>	<u>362</u>	459	361

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

The Express5800/R120d-1E and the Express5800/R120d-2E models are electronically equivalent. The results have been measured on the Express5800/R120d-1E model.

Added glibc-static-2.12-1.47.el6.x86_64.rpm to enable static linking

Transparent Huge Pages enabled with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 368

Express5800/R120d-2E (Intel Xeon E5-2420)

SPECint_rate_base2006 = 352

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

```
400.perlbench: icc -m64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 368

Express5800/R120d-2E (Intel Xeon E5-2420)

SPECint_rate_base2006 = 352

CPU2006 license: 9006

Test date: Apr-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 368

Express5800/R120d-2E (Intel Xeon E5-2420)

SPECint_rate_base2006 = 352

CPU2006 license: 9006

Test date: Apr-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 08:26:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 June 2012.