



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 1030

PowerEdge R815 (AMD Opteron 6278, 2.40 GHz)

SPECint_rate_base2006 = 897

CPU2006 license: 55


Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

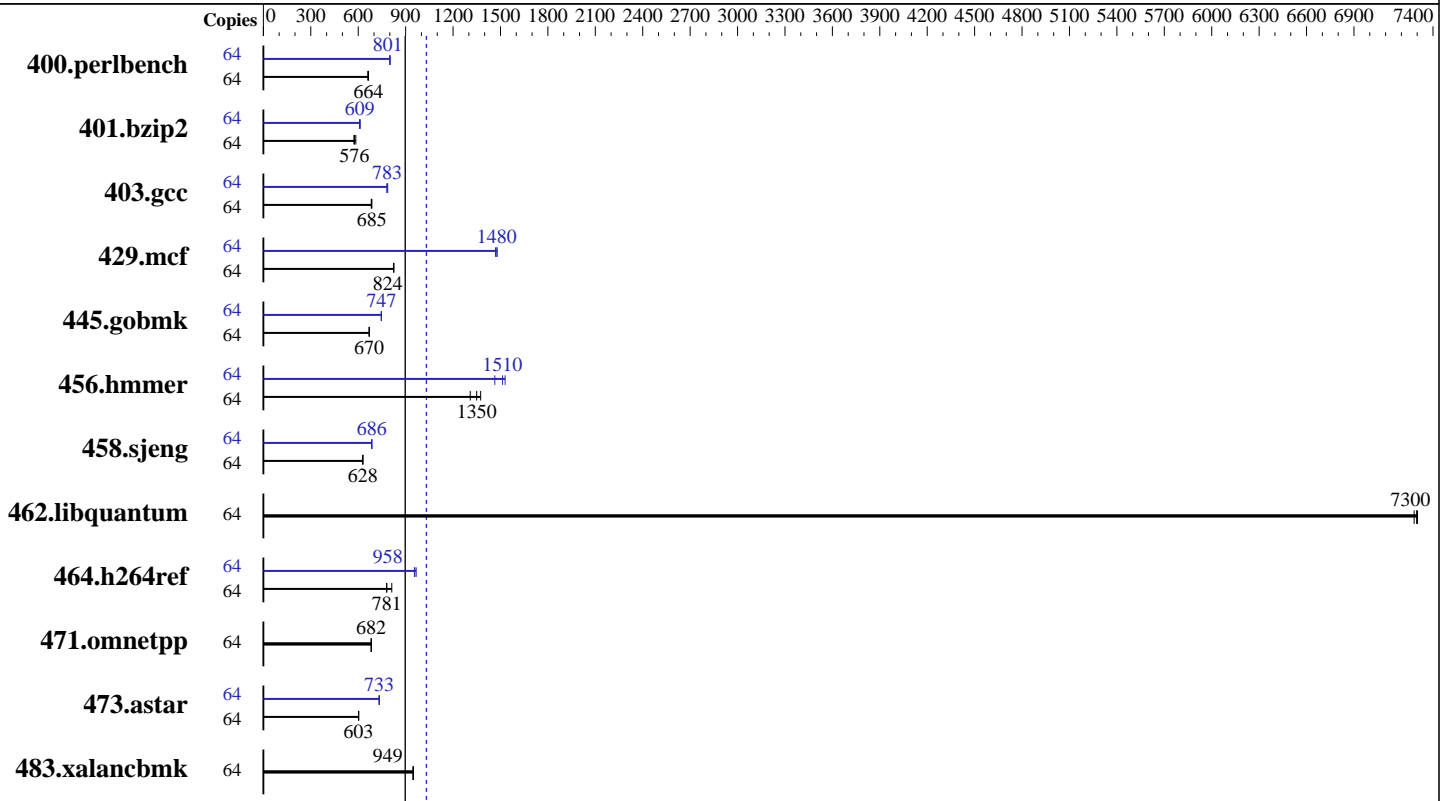

SPECint_rate_base2006 = 897

SPECint_rate2006 = 1030

Hardware

CPU Name: AMD Opteron 6278
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 3 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
 3.0.13-0.27-default
 Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite
 (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1030

PowerEdge R815 (AMD Opteron 6278, 2.40 GHz)

SPECint_rate_base2006 = 897

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	940	665	947	661	<u>941</u>	<u>664</u>	64	780	802	783	799	<u>781</u>	<u>801</u>
401.bzip2	64	1056	585	<u>1072</u>	<u>576</u>	1078	573	64	1016	608	<u>1013</u>	<u>609</u>	1008	613
403.gcc	64	<u>752</u>	<u>685</u>	755	683	751	686	64	655	787	659	782	<u>658</u>	<u>783</u>
429.mcf	64	<u>708</u>	<u>824</u>	709	824	707	826	64	395	1480	397	1470	<u>395</u>	<u>1480</u>
445.gobmk	64	1002	670	1003	669	<u>1002</u>	<u>670</u>	64	<u>899</u>	<u>747</u>	900	746	898	747
456.hammer	64	456	1310	434	1370	<u>442</u>	<u>1350</u>	64	<u>395</u>	<u>1510</u>	390	1530	408	1460
458.sjeng	64	<u>1233</u>	<u>628</u>	1233	628	1228	631	64	1129	686	<u>1129</u>	<u>686</u>	1130	686
462.libquantum	64	182	7300	182	7280	<u>182</u>	<u>7300</u>	64	182	7300	182	7280	<u>182</u>	<u>7300</u>
464.h264ref	64	1816	780	1743	812	<u>1814</u>	<u>781</u>	64	1465	967	1482	955	<u>1478</u>	<u>958</u>
471.omnetpp	64	<u>586</u>	<u>682</u>	585	684	587	682	64	<u>586</u>	<u>682</u>	585	684	587	682
473.astar	64	<u>746</u>	<u>603</u>	745	603	746	603	64	613	733	613	733	<u>613</u>	<u>733</u>
483.xalancbmk	64	465	950	<u>465</u>	<u>949</u>	467	946	64	465	950	<u>465</u>	<u>949</u>	467	946

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/cpu2006/amd1104-rate-libs-revC/32:/root/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1030

PowerEdge R815 (AMD Opteron 6278, 2.40 GHz)

SPECint_rate_base2006 = 897

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Feb-2012
Hardware Availability: Jul-2012
Software Availability: Jul-2011

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1030

PowerEdge R815 (AMD Opteron 6278, 2.40 GHz)

SPECint_rate_base2006 = 897

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
 -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bd=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 1030

PowerEdge R815 (AMD Opteron 6278, 2.40 GHz)

SPECint_rate_base2006 = 897

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

```
458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
          -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
          -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m
          -WOPT:sib=on
```

462.libquantum: basepeak = yes

```
464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
            -OPT:unroll_times_max=2 -IPA:plimit=20000
            -OPT:alias=disjoint -CG:ptr_load_use=0
            -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
          -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
          -OPT:alias=disjoint -INLINE:aggressive=on
          -IPA:small_pu=3000 -IPA:plimit=3000 -m32
          -HP:bd=2m:heap=2m
```

483.xalancbmk: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:43:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.