



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint®_rate2006 = 1060

Sun Server X2-8 (Intel Xeon E7-8870 2.40 GHz)

SPECint_rate_base2006 = 1000

CPU2006 license: 6


Test date: Nov-2012

Test sponsor: Oracle Corporation

Hardware Availability: Jul-2011

Tested by: Oracle Corporation

Software Availability: Dec-2011

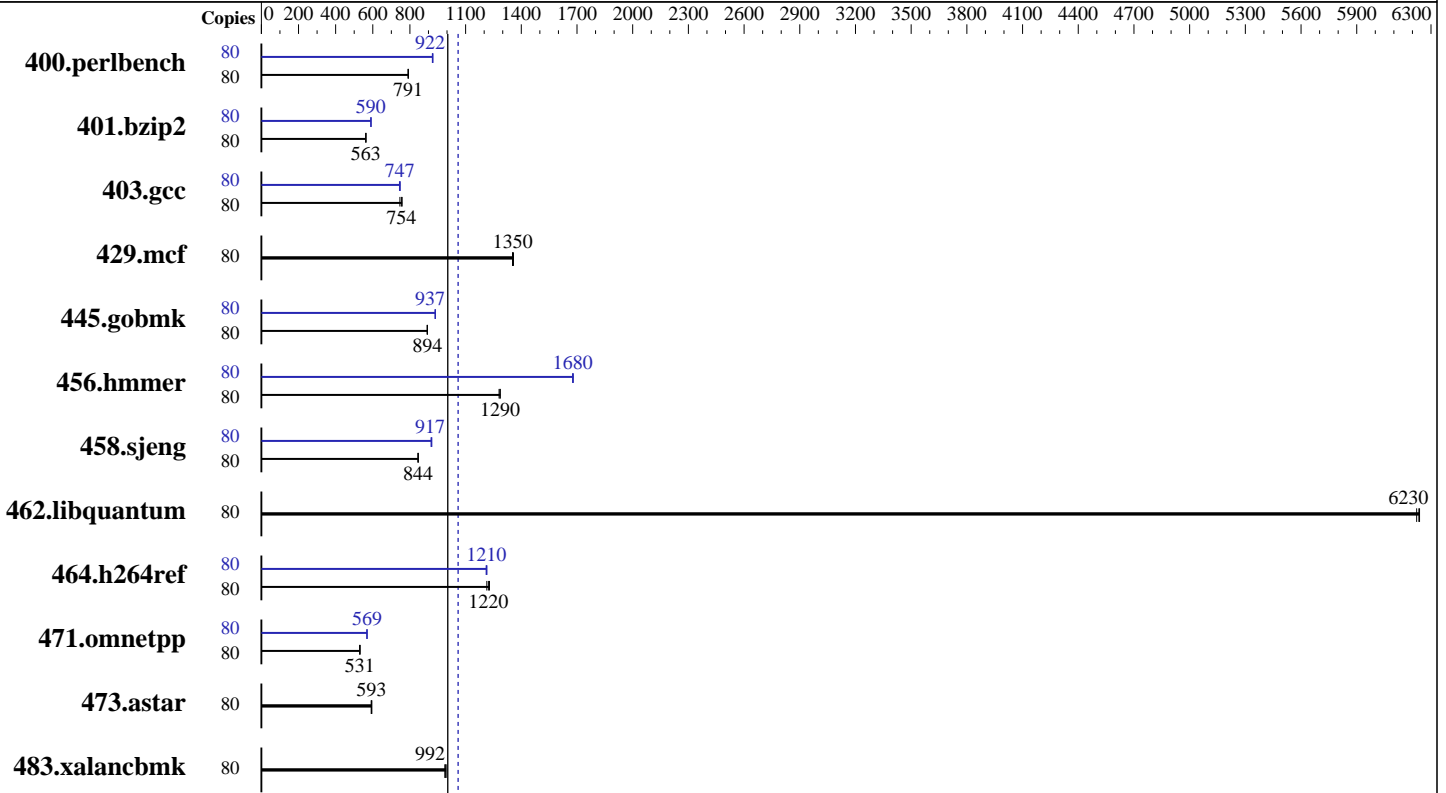

SPECint_rate_base2006 = 1000

SPECint_rate2006 = 1060

Hardware

CPU Name: Intel Xeon E7-8870
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (64 x 4 GB 2Rx8 PC3L-10600R-9, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 1 x 300 GB, 10 K RPM, SAS
 Other Hardware: None

Software

Operating System: Oracle Linux 6.2
 kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 1060

Sun Server X2-8 (Intel Xeon E7-8870 2.40 GHz)

SPECint_rate_base2006 = 1000

CPU2006 license: 6

Test date: Nov-2012

Test sponsor: Oracle Corporation

Hardware Availability: Jul-2011

Tested by: Oracle Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	988	791	988	791	988	791	80	845	924	849	921	848	922
401.bzip2	80	1372	563	1373	562	1371	563	80	1309	590	1308	590	1307	591
403.gcc	80	863	746	849	758	854	754	80	866	744	863	747	862	747
429.mcf	80	539	1350	539	1350	537	1360	80	539	1350	539	1350	537	1360
445.gobmk	80	939	893	939	894	939	894	80	896	937	897	936	895	938
456.hammer	80	580	1290	581	1290	583	1280	80	444	1680	445	1680	445	1680
458.sjeng	80	1145	845	1147	844	1147	844	80	1056	917	1059	914	1055	918
462.libquantum	80	266	6240	266	6220	266	6230	80	266	6240	266	6220	266	6230
464.h264ref	80	1448	1220	1458	1210	1441	1230	80	1457	1220	1460	1210	1462	1210
471.omnetpp	80	941	532	942	531	945	529	80	880	568	879	569	878	569
473.astar	80	949	592	944	595	948	593	80	949	592	944	595	948	593
483.xalancbmk	80	555	995	556	992	559	988	80	555	995	556	992	559	988

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Default BIOS Settings were used.

Sysinfo program /speccpu/cpu2006v1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on x4800-001 Fri Nov 2 13:35:31 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7- 8870 @ 2.40GHz

4 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 1060

Sun Server X2-8 (Intel Xeon E7-8870 2.40 GHz)

SPECint_rate_base2006 = 1000

CPU2006 license: 6

Test date: Nov-2012

Test sponsor: Oracle Corporation

Hardware Availability: Jul-2011

Tested by: Oracle Corporation

Software Availability: Dec-2011

Platform Notes (Continued)

```

siblings : 20
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
physical 2: cores 0 1 2 8 9 16 17 18 24 25
physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB

```

From /proc/meminfo

```

MemTotal:      264517388 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

Oracle Linux Server release 6.2

From /etc/*release* /etc/*version*

```

oracle-release: Oracle Linux Server release 6.2
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Oracle Linux Server release 6.2
system-release-cpe: cpe:/o:oracle:oracle_linux:6server:ga:server

```

uname -a:

```

Linux x4800-001 2.6.32-220.el6.x86_64 #1 SMP Wed Dec 7 10:41:06 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 2 11:54

SPEC is set to: /speccpu/cpu2006v1.2

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda5        ext3      271G  14G  244G   6% /

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/speccpu/cpu2006v1.2/libs/32:/speccpu/cpu2006v1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 1060

Sun Server X2-8 (Intel Xeon E7-8870 2.40 GHz)

SPECint_rate_base2006 = 1000

CPU2006 license: 6

Test date: Nov-2012

Test sponsor: Oracle Corporation

Hardware Availability: Jul-2011

Tested by: Oracle Corporation

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 1060

Sun Server X2-8 (Intel Xeon E7-8870 2.40 GHz)

SPECint_rate_base2006 = 1000

CPU2006 license: 6

Test date: Nov-2012

Test sponsor: Oracle Corporation

Hardware Availability: Jul-2011

Tested by: Oracle Corporation

Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 1060

Sun Server X2-8 (Intel Xeon E7-8870 2.40 GHz)

SPECint_rate_base2006 = 1000

CPU2006 license: 6

Test date: Nov-2012

Test sponsor: Oracle Corporation

Hardware Availability: Jul-2011

Tested by: Oracle Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:06:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 November 2012.