



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon I620-G10 (Intel Xeon E5-2650)

SPECint<sup>®</sup>\_rate2006 = 541

SPECint\_rate\_base2006 = 519

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

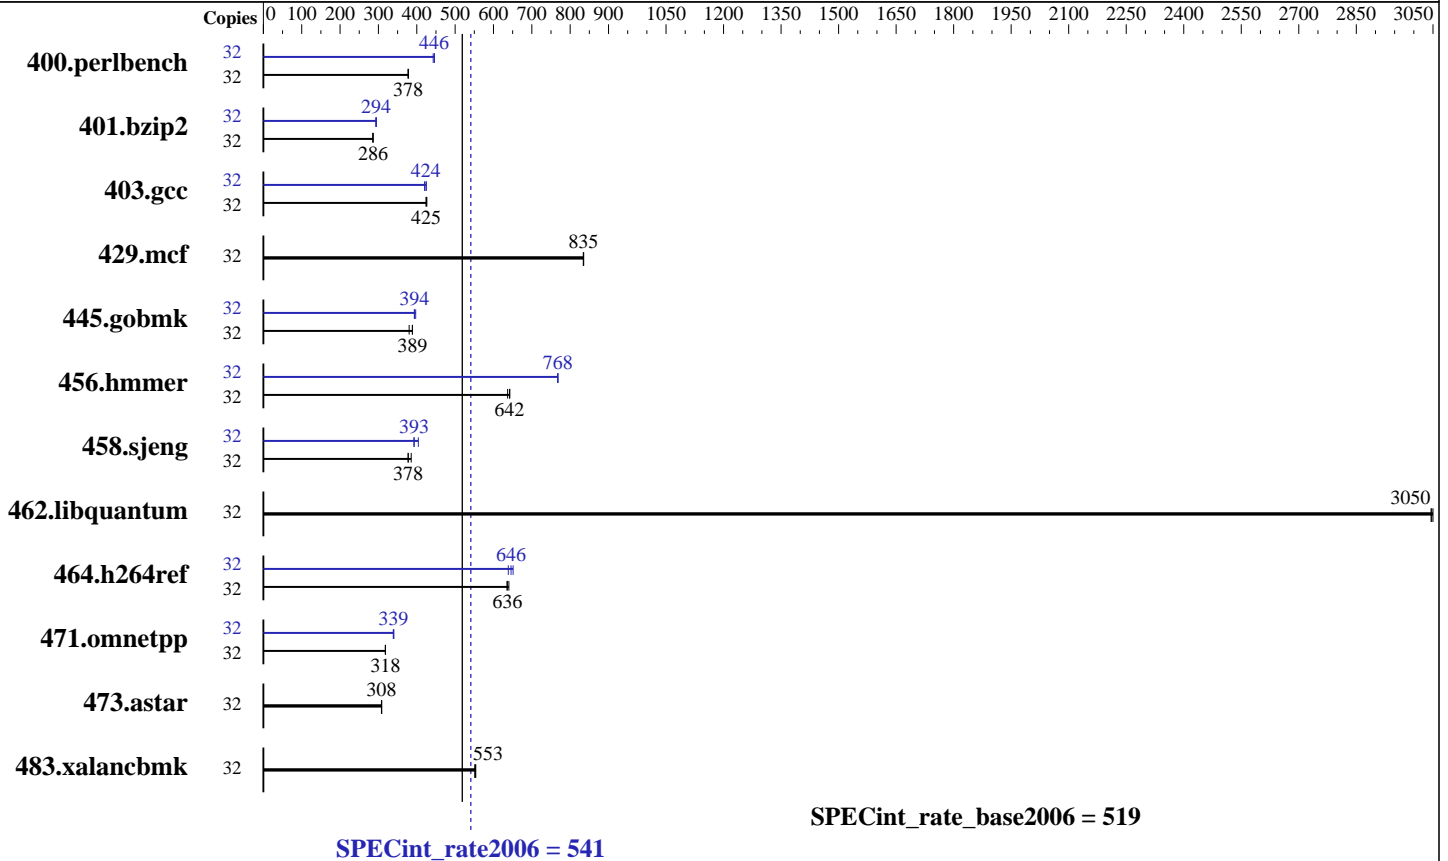

### Hardware

CPU Name: Intel Xeon E5-2650  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint\_rate2006 = 541

## I620-G10 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 519

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Apr-2013  
Hardware Availability: May-2012  
Software Availability: Jun-2012

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>828</b>	<b>378</b>	827	378	828	378	32	<b>701</b>	<b>446</b>	701	446	706	443
401.bzip2	32	1080	286	<b>1080</b>	<b>286</b>	1082	285	32	1048	295	1053	293	<b>1050</b>	<b>294</b>
403.gcc	32	<b>607</b>	<b>425</b>	607	424	604	426	32	<b>608</b>	<b>424</b>	606	425	613	420
429.mcf	32	<b>350</b>	<b>835</b>	350	834	349	835	32	<b>350</b>	<b>835</b>	350	834	349	835
445.gobmk	32	883	380	864	389	<b>864</b>	<b>389</b>	32	<b>852</b>	<b>394</b>	845	397	853	394
456.hammer	32	469	637	<b>465</b>	<b>642</b>	465	643	32	389	768	389	768	<b>389</b>	<b>768</b>
458.sjeng	32	1026	377	<b>1025</b>	<b>378</b>	1004	385	32	986	393	958	404	<b>984</b>	<b>393</b>
462.libquantum	32	<b>218</b>	<b>3050</b>	217	3050	218	3040	32	<b>218</b>	<b>3050</b>	217	3050	218	3040
464.h264ref	32	1106	640	<b>1113</b>	<b>636</b>	1115	635	32	1109	639	1087	651	<b>1097</b>	<b>646</b>
471.omnetpp	32	629	318	628	318	<b>628</b>	<b>318</b>	32	588	340	590	339	<b>590</b>	<b>339</b>
473.astar	32	728	309	<b>729</b>	<b>308</b>	730	308	32	728	309	<b>729</b>	<b>308</b>	730	308
483.xalancbmk	32	399	554	<b>399</b>	<b>553</b>	401	551	32	399	554	<b>399</b>	<b>553</b>	401	551

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Platform Notes

Sysinfo program /home/speccpu/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on I620-G10 Thu Apr 18 01:54:13 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 541

I620-G10 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 519

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Apr-2013  
Hardware Availability: May-2012  
Software Availability: Jun-2012

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132129164 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux I620-G10 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 17 01:43
```

```
SPEC is set to: /home/speccpu
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_i620g10-lv_home
                ext4      1.8T   39G  1.7T   3% /home
```

Additional information from dmidecode:

```
Memory:
14x Hynix Semiconducto HMT31GR7CFR4C 8 GB 1600 MHz 1 rank
2x Hynix Semiconductor HMT31GR7CFR4C- 8 GB 1600 MHz 1 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 541

I620-G10 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 519

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Apr-2013  
Hardware Availability: May-2012  
Software Availability: Jun-2012

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 541

I620-G10 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 519

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 541

I620-G10 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 519

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:34:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 May 2013.