



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint[®]_rate2006 = 699

Servidor Itautec MX225 (Intel Xeon E5-2690)

SPECint_rate_base2006 = 677

CPU2006 license: 9001


Test date: May-2013

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jan-2013

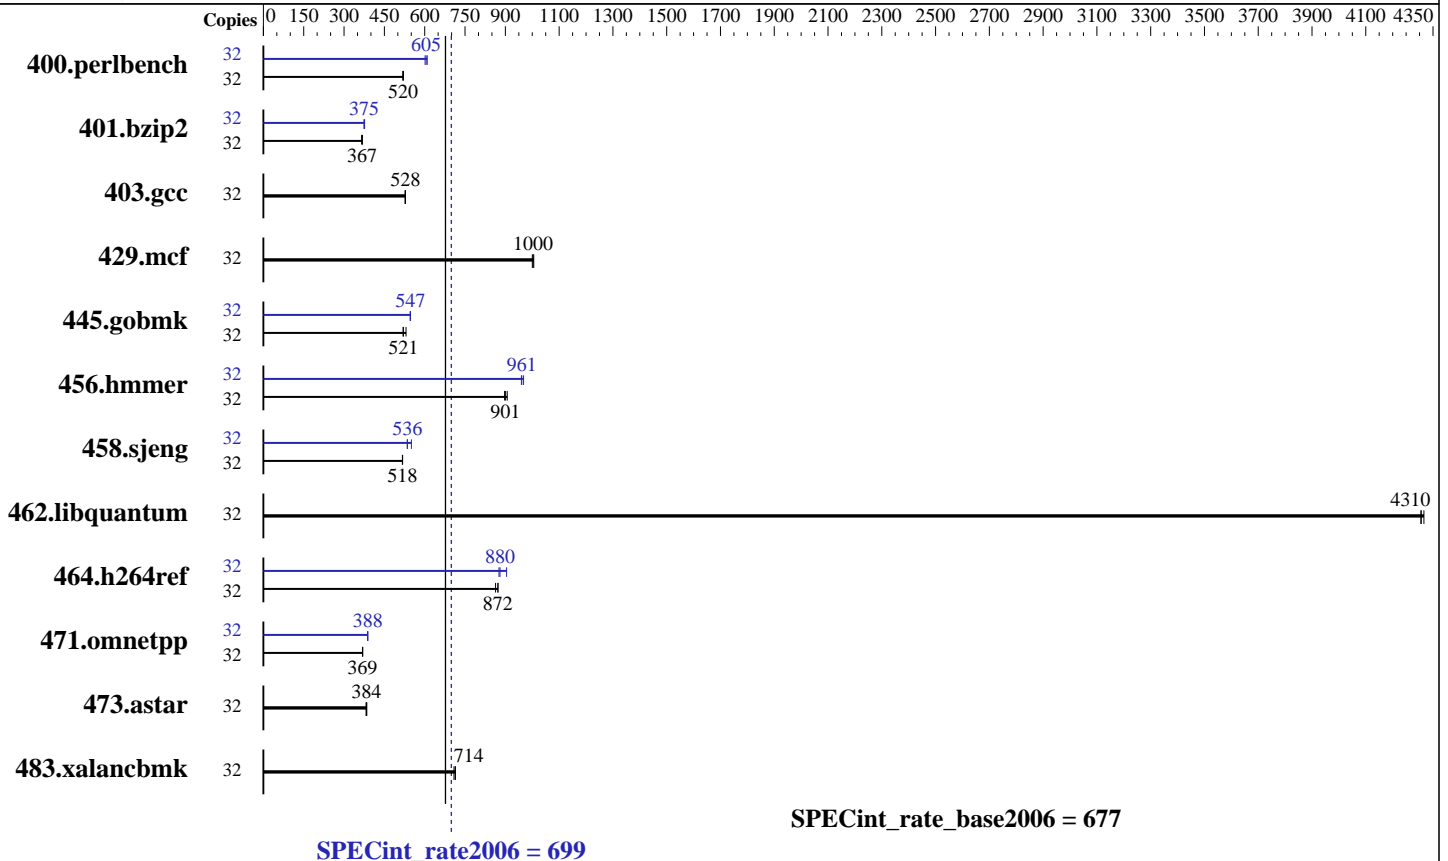

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 500 GB, SATA-3, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 13.1.0.146 of Intel Compiler XE Build 20130121
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 699

Servidor Itaotec MX225 (Intel Xeon E5-2690)

SPECint_rate_base2006 = 677

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: May-2013
Hardware Availability: Jun-2012
Software Availability: Jan-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	601	520	603	519	601	520	32	517	605	513	609	520	601
401.bzip2	32	838	368	845	366	841	367	32	824	375	820	376	824	375
403.gcc	32	488	528	489	527	487	528	32	488	528	489	527	487	528
429.mcf	32	291	1000	292	1000	290	1010	32	291	1000	292	1000	290	1010
445.gobmk	32	646	520	645	521	633	531	32	614	547	614	547	614	547
456.hammer	32	331	901	329	907	333	897	32	309	968	311	961	311	960
458.sjeng	32	748	518	748	518	749	517	32	723	535	703	550	723	536
462.libquantum	32	154	4310	154	4320	154	4310	32	154	4310	154	4320	154	4310
464.h264ref	32	812	872	820	863	812	872	32	808	876	783	904	805	880
471.omnetpp	32	542	369	543	369	541	370	32	516	388	515	388	516	388
473.astar	32	586	384	588	382	584	385	32	586	384	588	382	584	385
483.xalancbmk	32	309	714	311	709	309	714	32	309	714	311	709	309	714

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
Large pages were disabled through the command
'echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled/'

Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c
running on mx225 Tue May 14 17:18:55 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 699

Servidor Itaotec MX225 (Intel Xeon E5-2690)

SPECint_rate_base2006 = 677

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: May-2013
Hardware Availability: Jun-2012
Software Availability: Jan-2013

Platform Notes (Continued)

```
caution.)
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132068928 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux mx225 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 14 17:13
```

```
SPEC is set to: /home/rcaneca/cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/vg_mx225-lv_home
                ext4      404G      3.8G   380G   1% /home
```

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itaotec MX215.
The Servidor Itaotec MX215 and the Servidor Itaotec MX225
are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 699

Servidor Itautec MX225 (Intel Xeon E5-2690)

SPECint_rate_base2006 = 677

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2013
Hardware Availability: Jun-2012
Software Availability: Jan-2013

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32
400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64
C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 699

Servidor Itaotec MX225 (Intel Xeon E5-2690)

SPECint_rate_base2006 = 677

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: May-2013
Hardware Availability: Jun-2012
Software Availability: Jan-2013

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 699

Servidor Itautec MX225 (Intel Xeon E5-2690)

SPECint_rate_base2006 = 677

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2013
Hardware Availability: Jun-2012
Software Availability: Jan-2013

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.20130507.html
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.20130507.xml
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:21:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 June 2013.