



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®_rate2006 = 635

PRIMERGY CX250 S2, Intel Xeon E5-2643 v2, 3.50 GHz

SPECint_rate_base2006 = 611

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

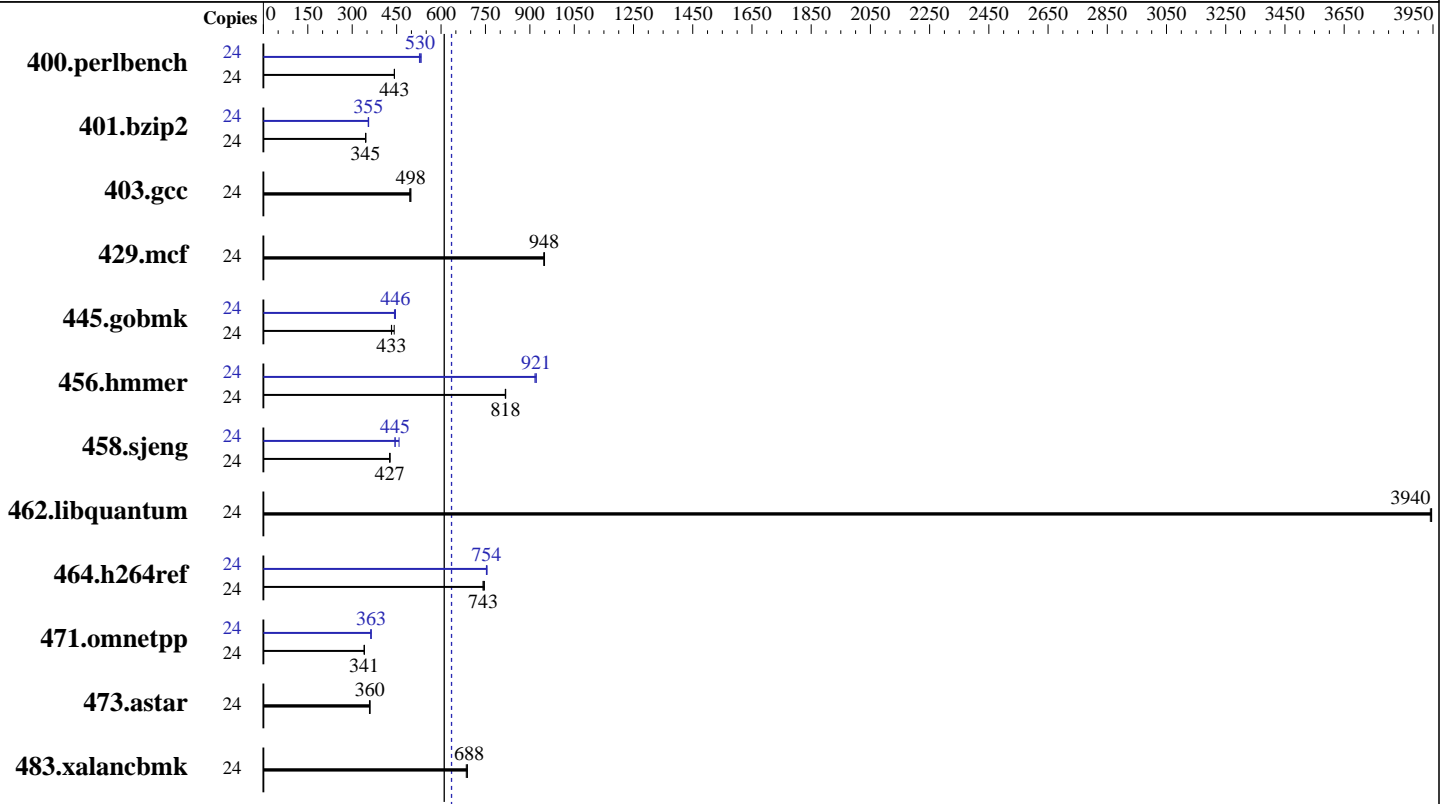

SPECint_rate2006 = 635

SPECint_rate_base2006 = 611

Hardware

CPU Name: Intel Xeon E5-2643 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx8 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.11.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = **635**

PRIMERGY CX250 S2, Intel Xeon E5-2643 v2, 3.50 GHz

SPECint_rate_base2006 = 611

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	530	443	530	442	530	443	24	445	527	442	530	440	533
401.bzip2	24	671	345	671	345	669	346	24	653	355	654	354	651	356
403.gcc	24	388	498	391	494	388	498	24	388	498	391	494	388	498
429.mcf	24	231	950	231	947	231	948	24	231	950	231	947	231	948
445.gobmk	24	581	433	582	432	570	442	24	565	446	565	446	569	443
456.hammer	24	274	818	274	817	274	818	24	243	921	244	917	243	921
458.sjeng	24	681	427	679	428	681	427	24	634	458	653	445	653	445
462.libquantum	24	126	3940	126	3940	126	3950	24	126	3940	126	3940	126	3950
464.h264ref	24	716	742	715	743	711	747	24	705	753	704	754	703	755
471.omnetpp	24	440	341	440	341	440	341	24	412	364	413	363	413	363
473.astar	24	468	360	469	360	470	358	24	468	360	469	360	470	358
483.xalancbmk	24	240	689	242	685	241	688	24	240	689	242	685	241	688

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Energy Performance = Performance

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 635

PRIMERGY CX250 S2, Intel Xeon E5-2643 v2, 3.50 GHz

SPECint_rate_base2006 = 611

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 635

PRIMERGY CX250 S2, Intel Xeon E5-2643 v2, 3.50 GHz

SPECint_rate_base2006 = 611

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 635

PRIMERGY CX250 S2, Intel Xeon E5-2643 v2, 3.50 GHz

SPECint_rate_base2006 = 611

CPU2006 license: 19

Test date: Oct-2013

Test sponsor: Fujitsu

Hardware Availability: Sep-2013

Tested by: Fujitsu

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 18:00:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2013.