



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint<sup>®</sup>\_rate2006 = 688

SPECint\_rate\_base2006 = 663

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

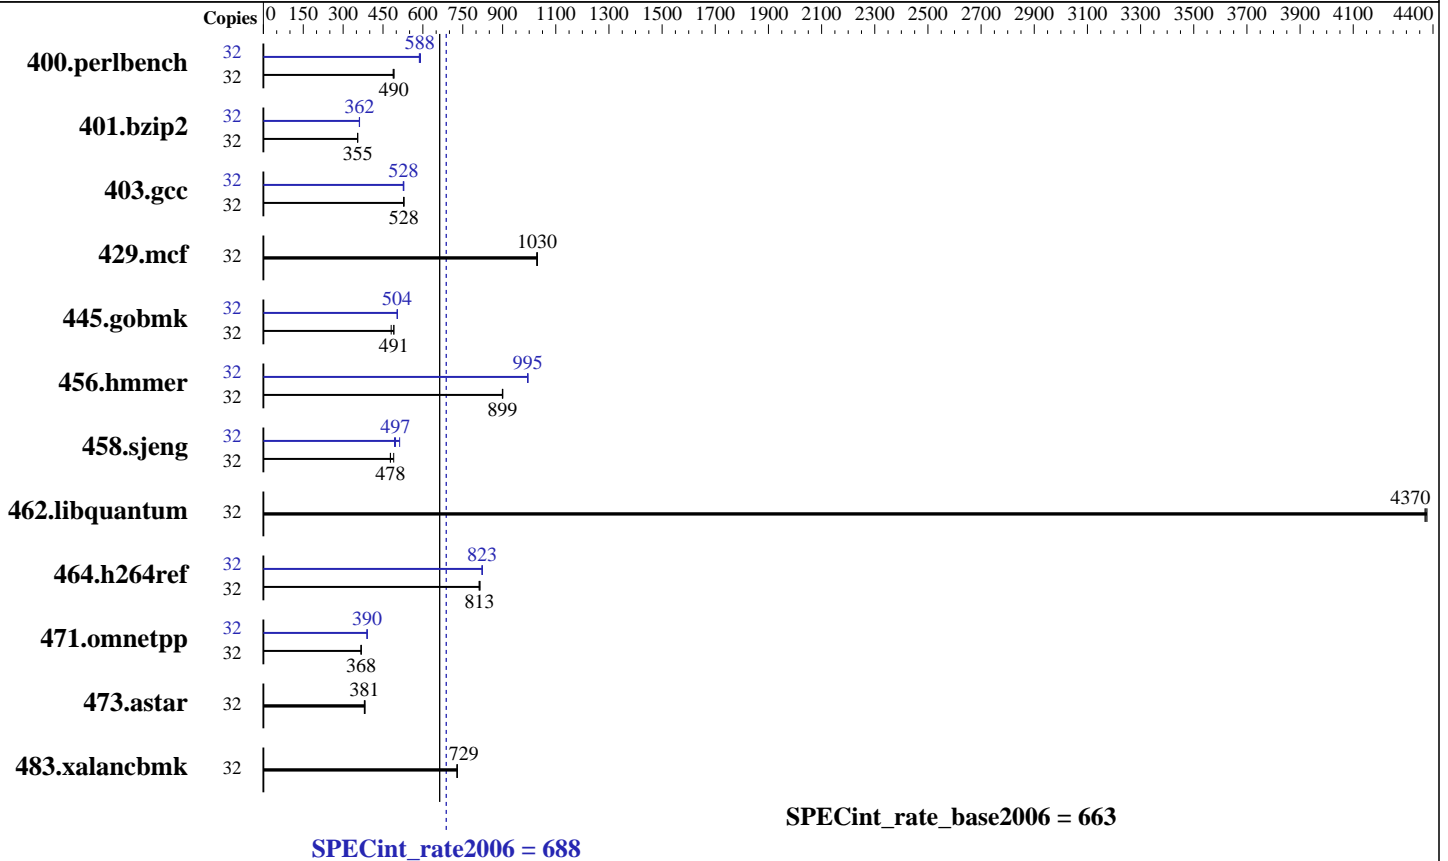

### Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 X 300 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate2006 = 688

SPECint\_rate\_base2006 = 663

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Oct-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	32	636	491	640	488	<b>638</b>	<b>490</b>	32	529	591	533	587	<b>531</b>	<b>588</b>		
401.bzip2	32	<b>871</b>	<b>355</b>	872	354	870	355	32	856	361	<b>854</b>	<b>362</b>	854	362		
403.gcc	32	487	529	488	528	<b>488</b>	<b>528</b>	32	<b>488</b>	<b>528</b>	488	528	490	526		
429.mcf	32	284	1030	<b>283</b>	<b>1030</b>	283	1030	32	284	1030	<b>283</b>	<b>1030</b>	283	1030		
445.gobmk	32	698	481	<b>684</b>	<b>491</b>	684	491	32	666	504	<b>666</b>	<b>504</b>	667	503		
456.hammer	32	332	899	<b>332</b>	<b>899</b>	331	901	32	300	994	300	995	<b>300</b>	<b>995</b>		
458.sjeng	32	790	490	<b>810</b>	<b>478</b>	811	478	32	<b>779</b>	<b>497</b>	785	493	755	513		
462.libquantum	32	<b>152</b>	<b>4370</b>	151	4380	152	4370	32	<b>152</b>	<b>4370</b>	151	4380	152	4370		
464.h264ref	32	869	815	<b>871</b>	<b>813</b>	873	811	32	859	824	<b>860</b>	<b>823</b>	861	822		
471.omnetpp	32	544	367	543	368	<b>544</b>	<b>368</b>	32	512	391	<b>512</b>	<b>390</b>	513	390		
473.astar	32	587	383	592	380	<b>590</b>	<b>381</b>	32	587	383	592	380	<b>590</b>	<b>381</b>		
483.xalancbmk	32	<b>303</b>	<b>729</b>	303	729	303	728	32	<b>303</b>	<b>729</b>	303	729	303	728		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

```

Intel HT Technology = Enabled
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Energy Performance policy set to Performance
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
LV DDR Mode set to Performance-mode
DRAM Refresh Rate Set to 1x
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on SL1-IVB Thu Oct 10 00:12:48 2013

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2650 v2, 2.60 GHz)

**SPECint\_rate2006 = 688**

**SPECint\_rate\_base2006 = 663**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

### Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
 2 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings   : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      132124300 kB
HugePages_Total:    0
Hugepagesize:     2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux SL1-IVB 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 9 12:41

SPEC is set to: /opt/cpu2006-1.2

```
Filesystem      Type      Size Used Avail Use% Mounted on
/dev/sdb1       ext4      275G 230G  31G  89% /
```

Additional information from dmidecode:

```
BIOS Cisco Systems, Inc. C220M3.1.5.2.27.071120132232 07/11/2013
```

Memory:

```
16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate2006 = 688

SPECint\_rate\_base2006 = 663

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Oct-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## General Notes (Continued)

memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmarthearp

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate2006 = 688

SPECint\_rate\_base2006 = 663

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Oct-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2650 v2, 2.60 GHz)

**SPECint\_rate2006 = 688**

**SPECint\_rate\_base2006 = 663**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 18:23:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2013.