



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint<sup>®</sup>\_rate2006 = 186

I620-G15 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 9046


Test date: Dec-2013

Test sponsor: Sugon

Hardware Availability: Jan-2014

Tested by: Sugon

Software Availability: Jan-2014

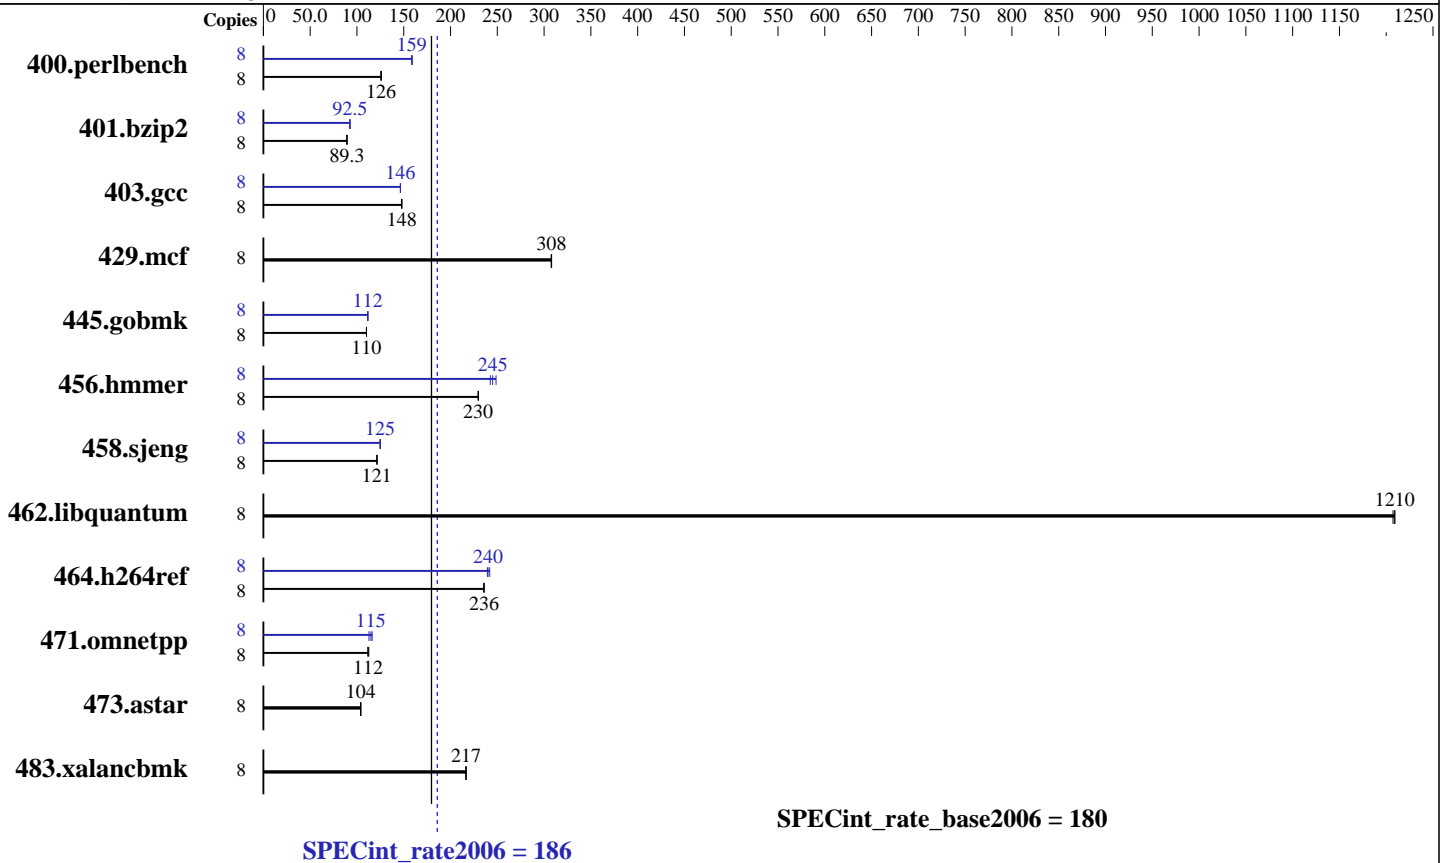

### Hardware

CPU Name: Intel Xeon E5-2603 v2  
 CPU Characteristics: 1800  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 X 3 TB SATA 7200 RPM, RAID 0  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86\_64) 3.0.76-0.11-default  
 Compiler: C/C++; Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint\_rate2006 = 186

I620-G15 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Dec-2013  
Hardware Availability: Jan-2014  
Software Availability: Jan-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	622	126	620	126	<b><u>622</u></b>	<b><u>126</u></b>	8	<b><u>493</u></b>	<b><u>159</u></b>	493	159	492	159
401.bzip2	8	865	89.3	<b><u>864</u></b>	<b><u>89.3</u></b>	864	89.4	8	834	92.5	<b><u>835</u></b>	<b><u>92.5</u></b>	835	92.4
403.gcc	8	435	148	<b><u>436</u></b>	<b><u>148</u></b>	436	148	8	<b><u>440</u></b>	<b><u>146</u></b>	440	146	439	147
429.mcf	8	<b><u>237</u></b>	<b><u>308</u></b>	237	308	237	308	8	<b><u>237</u></b>	<b><u>308</u></b>	237	308	237	308
445.gobmk	8	762	110	761	110	<b><u>762</u></b>	<b><u>110</u></b>	8	<b><u>752</u></b>	<b><u>112</u></b>	752	112	752	112
456.hammer	8	325	230	325	230	<b><u>325</u></b>	<b><u>230</u></b>	8	300	249	<b><u>305</u></b>	<b><u>245</u></b>	308	243
458.sjeng	8	798	121	<b><u>797</u></b>	<b><u>121</u></b>	797	121	8	775	125	<b><u>775</u></b>	<b><u>125</u></b>	776	125
462.libquantum	8	137	1210	<b><u>137</u></b>	<b><u>1210</u></b>	137	1210	8	137	1210	<b><u>137</u></b>	<b><u>1210</u></b>	137	1210
464.h264ref	8	<b><u>751</u></b>	<b><u>236</u></b>	752	236	751	236	8	<b><u>737</u></b>	<b><u>240</u></b>	732	242	739	239
471.omnetpp	8	<b><u>447</u></b>	<b><u>112</u></b>	444	113	448	112	8	443	113	<b><u>435</u></b>	<b><u>115</u></b>	430	116
473.astar	8	540	104	<b><u>540</u></b>	<b><u>104</u></b>	539	104	8	540	104	<b><u>540</u></b>	<b><u>104</u></b>	539	104
483.xalancbmk	8	<b><u>255</u></b>	<b><u>217</u></b>	255	216	255	217	8	<b><u>255</u></b>	<b><u>217</u></b>	255	216	255	217

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Intel Virtualization technology set to disabled  
Power Technology set to performance  
Turbo boost set to disable  
DDR Speed set to Auto  
Sysinfo program /root/cpu2006/config/sysinfo.rev6874  
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998  
running on linux-e494 Sat Dec 14 02:50:03 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz  
2 "physical id"s (chips)  
8 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 186

I620-G15 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

From /proc/meminfo

```
MemTotal:      264524132 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux-e494 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 14 02:28 last=S

SPEC is set to: /root/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext3  2.7T  633G  2.1T  24% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. V8.100A 10/31/2013

Memory:

16x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 186

I620-G15 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

## General Notes (Continued)

Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 186

I620-G15 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 9046

Test date: Dec-2013

Test sponsor: Sugon

Hardware Availability: Jan-2014

Tested by: Sugon

Software Availability: Jan-2014

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 186

I620-G15 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Jan-2014

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 21:05:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 January 2014.