



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

## SPECint<sup>®</sup>\_rate2006 = Not Run

ProLiant DL385p Gen8  
(2.30 GHz, AMD Opteron 6376)

## SPECint\_rate\_base2006 = 458

CPU2006 license: 3


Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

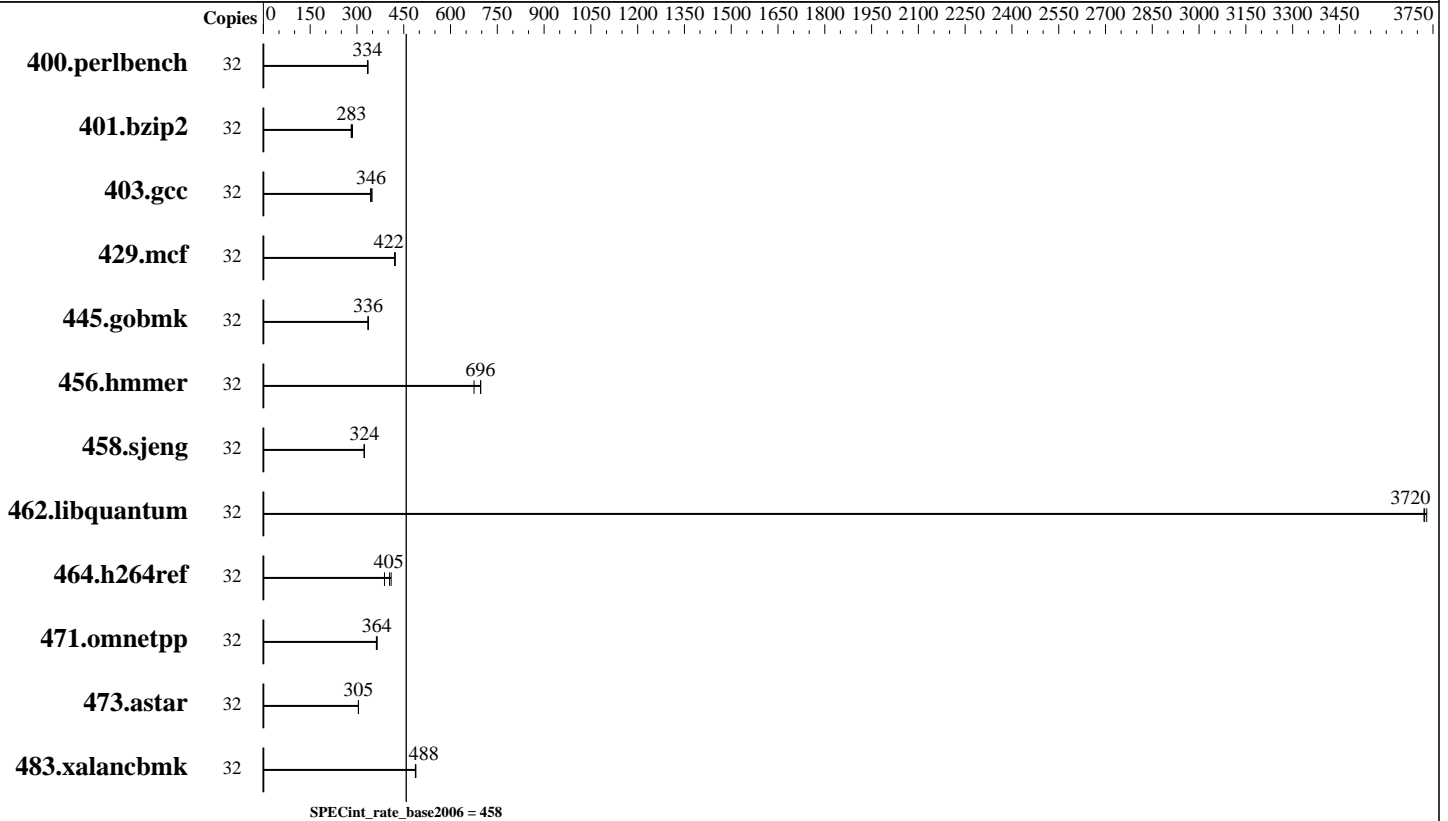

### Hardware

CPU Name: AMD Opteron 6376  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 512 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 146 GB 15 K SAS, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4,  
 (Santiago)  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = Not Run

ProLiant DL385p Gen8  
(2.30 GHz, AMD Opteron 6376)

SPECint\_rate\_base2006 = 458

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jun-2013  
Hardware Availability: Dec-2012  
Software Availability: Feb-2013

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>936</b>	<b>334</b>	932	336	937	334							
401.bzip2	32	1097	282	1081	286	<b>1092</b>	<b>283</b>							
403.gcc	32	750	344	739	348	<b>744</b>	<b>346</b>							
429.mcf	32	<b>691</b>	<b>422</b>	694	421	691	422							
445.gobmk	32	1000	336	<b>999</b>	<b>336</b>	998	336							
456.hammer	32	442	675	428	697	<b>429</b>	<b>696</b>							
458.sjeng	32	1199	323	1196	324	<b>1196</b>	<b>324</b>							
462.libquantum	32	178	3730	<b>178</b>	<b>3720</b>	178	3720							
464.h264ref	32	<b>1750</b>	<b>405</b>	1824	388	1729	410							
471.omnetpp	32	552	362	<b>550</b>	<b>364</b>	548	365							
473.astar	32	738	304	737	305	<b>737</b>	<b>305</b>							
483.xalancbmk	32	452	489	453	487	<b>452</b>	<b>488</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
  
Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

### Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Collaborative Power Control set to Disabled  
Dynamic Power Capping Functionality set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = Not Run**

ProLiant DL385p Gen8  
(2.30 GHz, AMD Opteron 6376)

**SPECint\_rate\_base2006 = 458**

**CPU2006 license:** 3

**Test date:** Jun-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/cpu2006/amd1206-rate-libs-revA/32:/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:

-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = Not Run

ProLiant DL385p Gen8  
(2.30 GHz, AMD Opteron 6376)

SPECint\_rate\_base2006 = 458

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2013  
**Hardware Availability:** Dec-2012  
**Software Availability:** Feb-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:55:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 April 2014.