



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M10-4S

SPECint[®]_rate2006 = 31400

SPECint_rate_base2006 = 25500

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2014

Hardware Availability: Apr-2014

Software Availability: Feb-2014

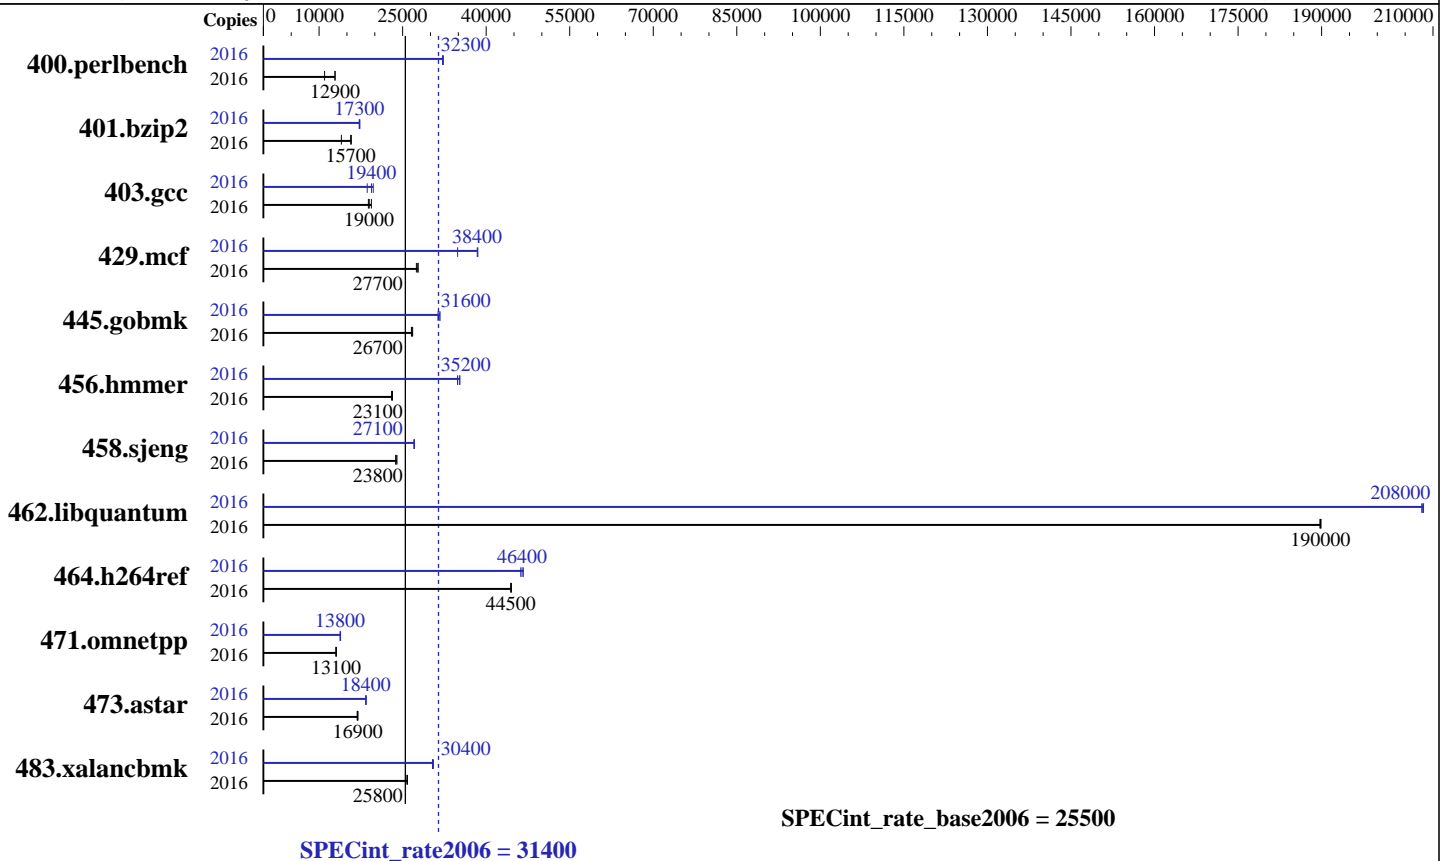

Hardware

CPU Name: SPARC64 X+

CPU Characteristics: 3700

CPU MHz: Integrated

FPU: Integrated

CPU(s) enabled: 1024 cores, 64 chips, 16 cores/chip, 2 threads/core

CPU(s) orderable: 1 to 16 BBs; each BB contains 2 or 4 CPU chips; each CPU chip contains 4, 8, 12, 16 cores

Primary Cache: 64 KB I + 64 KB D on chip per core

Secondary Cache: 24 MB I+D on chip per chip

L3 Cache: None

Other Cache: None

Memory: 8576 GB (16 x 32 GB + 504 x 16 GB)
chip#0: 512 GB (16 x 32 GB 4Rx4 PC3-10600R-9, ECC)
chip#1-#63: 8064 GB (504 x 16 GB 2Rx4 PC3L-12800R-11, ECC)

Disk Subsystem: tmpfs
600 GB 10,025 RPM Toshiba MBF2600RC SAS (for system disk)

Other Hardware: None

Software

Operating System: Solaris 11.1 SRU 15.4

Compiler: C/C++: Version 12.3 of Oracle Solaris Studio 10/13 Patch Set

Auto Parallel: No

File System: tmpfs (output_root was used to put run directories in /tmp/cpu2006)

System State: zfs

Base Pointers: Default

Peak Pointers: 32-bit

Other Software: 32-bit
None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 31400

SPECint_rate_base2006 = 25500

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2014
Hardware Availability: Apr-2014
Software Availability: Feb-2014

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2016	1792	11000	1531	12900	1531	12900	2016	612	32200	610	32300	610	32300
401.bzip2	2016	1389	14000	1232	15800	1241	15700	2016	1131	17200	1126	17300	1124	17300
403.gcc	2016	861	18900	837	19400	854	19000	2016	823	19700	870	18600	836	19400
429.mcf	2016	662	27800	663	27700	669	27500	2016	527	34900	479	38400	477	38500
445.gobmk	2016	793	26700	796	26600	789	26800	2016	675	31300	670	31600	667	31700
456.hammer	2016	813	23100	813	23100	817	23000	2016	540	34900	535	35200	533	35300
458.sjeng	2016	1027	23800	1017	24000	1023	23800	2016	901	27100	900	27100	901	27100
462.libquantum	2016	220	190000	220	190000	220	190000	2016	201	208000	201	208000	201	208000
464.h264ref	2016	1004	44400	1002	44500	1004	44500	2016	960	46400	956	46700	965	46200
471.omnetpp	2016	966	13000	963	13100	965	13100	2016	913	13800	910	13900	913	13800
473.astar	2016	840	16800	836	16900	834	17000	2016	768	18400	769	18400	768	18400
483.xalancbmk	2016	538	25900	539	25800	539	25800	2016	458	30400	458	30400	456	30500

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:

(/etc/system parameters)

autoup = 1555200

Causes pages older than the listed number of seconds to be written by fsflush.

tune_t_fsflushr = 259200

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

Platform Notes

Sysinfo program /export/cpu2006-v1.2/config/sysinfo

\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 5ec117938769af2bf59ae0ed87ea9ccd

running on spec-bb03 Tue Mar 25 00:29:30 2014

This section contains SUT (System Under Test) info as seen by

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 31400

SPECint_rate_base2006 = 25500

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2014

Hardware Availability: Apr-2014

Software Availability: Feb-2014

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo

- SPARC64-X+ (chipid 0, clock 3700 MHz)
- SPARC64-X+ (chipid 1, clock 3700 MHz)
- SPARC64-X+ (chipid 10, clock 3700 MHz)
- SPARC64-X+ (chipid 11, clock 3700 MHz)
- SPARC64-X+ (chipid 12, clock 3700 MHz)
- SPARC64-X+ (chipid 13, clock 3700 MHz)
- SPARC64-X+ (chipid 14, clock 3700 MHz)
- SPARC64-X+ (chipid 15, clock 3700 MHz)
- SPARC64-X+ (chipid 16, clock 3700 MHz)
- SPARC64-X+ (chipid 17, clock 3700 MHz)
- SPARC64-X+ (chipid 18, clock 3700 MHz)
- SPARC64-X+ (chipid 19, clock 3700 MHz)
- SPARC64-X+ (chipid 2, clock 3700 MHz)
- SPARC64-X+ (chipid 20, clock 3700 MHz)
- SPARC64-X+ (chipid 21, clock 3700 MHz)
- SPARC64-X+ (chipid 22, clock 3700 MHz)
- SPARC64-X+ (chipid 23, clock 3700 MHz)
- SPARC64-X+ (chipid 24, clock 3700 MHz)
- SPARC64-X+ (chipid 25, clock 3700 MHz)
- SPARC64-X+ (chipid 26, clock 3700 MHz)
- SPARC64-X+ (chipid 27, clock 3700 MHz)
- SPARC64-X+ (chipid 28, clock 3700 MHz)
- SPARC64-X+ (chipid 29, clock 3700 MHz)
- SPARC64-X+ (chipid 3, clock 3700 MHz)
- SPARC64-X+ (chipid 30, clock 3700 MHz)
- SPARC64-X+ (chipid 31, clock 3700 MHz)
- SPARC64-X+ (chipid 32, clock 3700 MHz)
- SPARC64-X+ (chipid 33, clock 3700 MHz)
- SPARC64-X+ (chipid 34, clock 3700 MHz)
- SPARC64-X+ (chipid 35, clock 3700 MHz)
- SPARC64-X+ (chipid 36, clock 3700 MHz)
- SPARC64-X+ (chipid 37, clock 3700 MHz)
- SPARC64-X+ (chipid 38, clock 3700 MHz)
- SPARC64-X+ (chipid 39, clock 3700 MHz)
- SPARC64-X+ (chipid 4, clock 3700 MHz)
- SPARC64-X+ (chipid 40, clock 3700 MHz)
- SPARC64-X+ (chipid 41, clock 3700 MHz)
- SPARC64-X+ (chipid 42, clock 3700 MHz)
- SPARC64-X+ (chipid 43, clock 3700 MHz)
- SPARC64-X+ (chipid 44, clock 3700 MHz)
- SPARC64-X+ (chipid 45, clock 3700 MHz)
- SPARC64-X+ (chipid 46, clock 3700 MHz)
- SPARC64-X+ (chipid 47, clock 3700 MHz)
- SPARC64-X+ (chipid 48, clock 3700 MHz)
- SPARC64-X+ (chipid 49, clock 3700 MHz)
- SPARC64-X+ (chipid 5, clock 3700 MHz)
- SPARC64-X+ (chipid 50, clock 3700 MHz)
- SPARC64-X+ (chipid 51, clock 3700 MHz)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 31400

SPECint_rate_base2006 = 25500

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2014
Hardware Availability: Apr-2014
Software Availability: Feb-2014

Platform Notes (Continued)

SPARC64-X+ (chipid 52, clock 3700 MHz)
SPARC64-X+ (chipid 53, clock 3700 MHz)
SPARC64-X+ (chipid 54, clock 3700 MHz)
SPARC64-X+ (chipid 55, clock 3700 MHz)
SPARC64-X+ (chipid 56, clock 3700 MHz)
SPARC64-X+ (chipid 57, clock 3700 MHz)
SPARC64-X+ (chipid 58, clock 3700 MHz)
SPARC64-X+ (chipid 59, clock 3700 MHz)
SPARC64-X+ (chipid 6, clock 3700 MHz)
SPARC64-X+ (chipid 60, clock 3700 MHz)
SPARC64-X+ (chipid 61, clock 3700 MHz)
SPARC64-X+ (chipid 62, clock 3700 MHz)
SPARC64-X+ (chipid 63, clock 3700 MHz)
SPARC64-X+ (chipid 7, clock 3700 MHz)
SPARC64-X+ (chipid 8, clock 3700 MHz)
SPARC64-X+ (chipid 9, clock 3700 MHz)
64 chips
2048 threads
3700 MHz

From kstat: 1024 cores

From prtconf: 8760320 Megabytes

/etc/release:
Oracle Solaris 11.1 SPARC
uname -a:
SunOS spec-bb03 5.11 11.1 sun4v sparcsun4v

disk: df -h \$SPEC
Filesystem Size Used Available Capacity Mounted on
rpool/export 547G 35G 423G 8% /export

(End of data from sysinfo program)

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 31400

Fujitsu SPARC M10-4S

SPECint_rate_base2006 = 25500

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2014
Hardware Availability: Apr-2014
Software Availability: Feb-2014

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -xtarget=sparc64x -fma=fused -xipo=2 -xpagesize=4M
-xalias_level=std -M map.bssalign

C++ benchmarks:
-fast -xtarget=sparc64x -fma=fused -xipo=2 -xpagesize=4M
-xalias_level=compatible -library=stlport4 -M map.bssalign -lfast

Base Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 31400

Fujitsu SPARC M10-4S

SPECint_rate_base2006 = 25500

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2014
Hardware Availability: Apr-2014
Software Availability: Feb-2014

Peak Optimization Flags (Continued)

- 400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=1 -xalias_level=std
-xrestrict -xprefetch=no%auto -xO4 -M map.256M.align
-lfast
- 401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xalias_level=strong
-xprefetch=no%auto -W2,-Ainline:rs=1000 -W2,-Ainline:cs=500
-W2,-Ainline:inc=60 -M map.256M.align -lfast
- 403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xO4 -xipo=2 -xprefetch=no%auto
-M map.256M.align
- 429.mcf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=2 -xalias_level=std
-xprefetch_level=1 -xprefetch=latx:0.2 -W2,-Asac
-M map.256M.align
- 445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xO4 -xalias_level=std
-xrestrict -xprefetch=no%auto -Wc,-Qiselect-funcalign=64
-M map.256M.align
- 456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=1 -xalias_level=std
-xunroll=6 -xprefetch=latx:3.0
-Wc,-Qpeep-Ex:minmax_use_cmov=2 -Wc,-Qms_pipe+ulmscc=1
-M map.256M.align
- 458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xO4 -xipo=2 -xalias_level=std
-xprefetch=no%auto -Wc,-Qlu-en=1-t=4 -M map.256M.align
- 462.libquantum: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2
-xalias_level=std -xunroll=8 -xprefetch=no%auto
-Wc,-Qlu-en=1-t=4 -M map.256M.align -lbsdmalloc
- 464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xalias_level=strong -xipo=1
-Wc,-Qiselect-funcalign=64 -M map.256M.align

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4S

SPECint_rate2006 = 31400

SPECint_rate_base2006 = 25500

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2014
Hardware Availability: Apr-2014
Software Availability: Feb-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=1 -xalias_level=compatible
-xunroll=2 -xprefetch_level=3 -W2,-Asac -library=stlport4
-M map.256M.align -lfast

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xalias_level=compatible
-xprefetch=no%auto -library=stlport4 -M map.256M.align
-lfast

483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=2 -xalias_level=compatible
-xdepend -xprefetch_level=3 -xprefetch=latx:0.4
-library=stlport4 -Wc,-Qpeep-Ex:minmax_use_cmov=2
-Wc,-Qms_pipe+ulmscc=1 -W2,-Asac -M map.256M.align -lfast

Peak Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20140423.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20140423.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:16:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 April 2014.