



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 1080

ProLiant DL585 G7
(2.40 GHZ AMD Opteron 6378)

SPECint_rate_base2006 = 942

CPU2006 license: 3


Test date: Jun-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

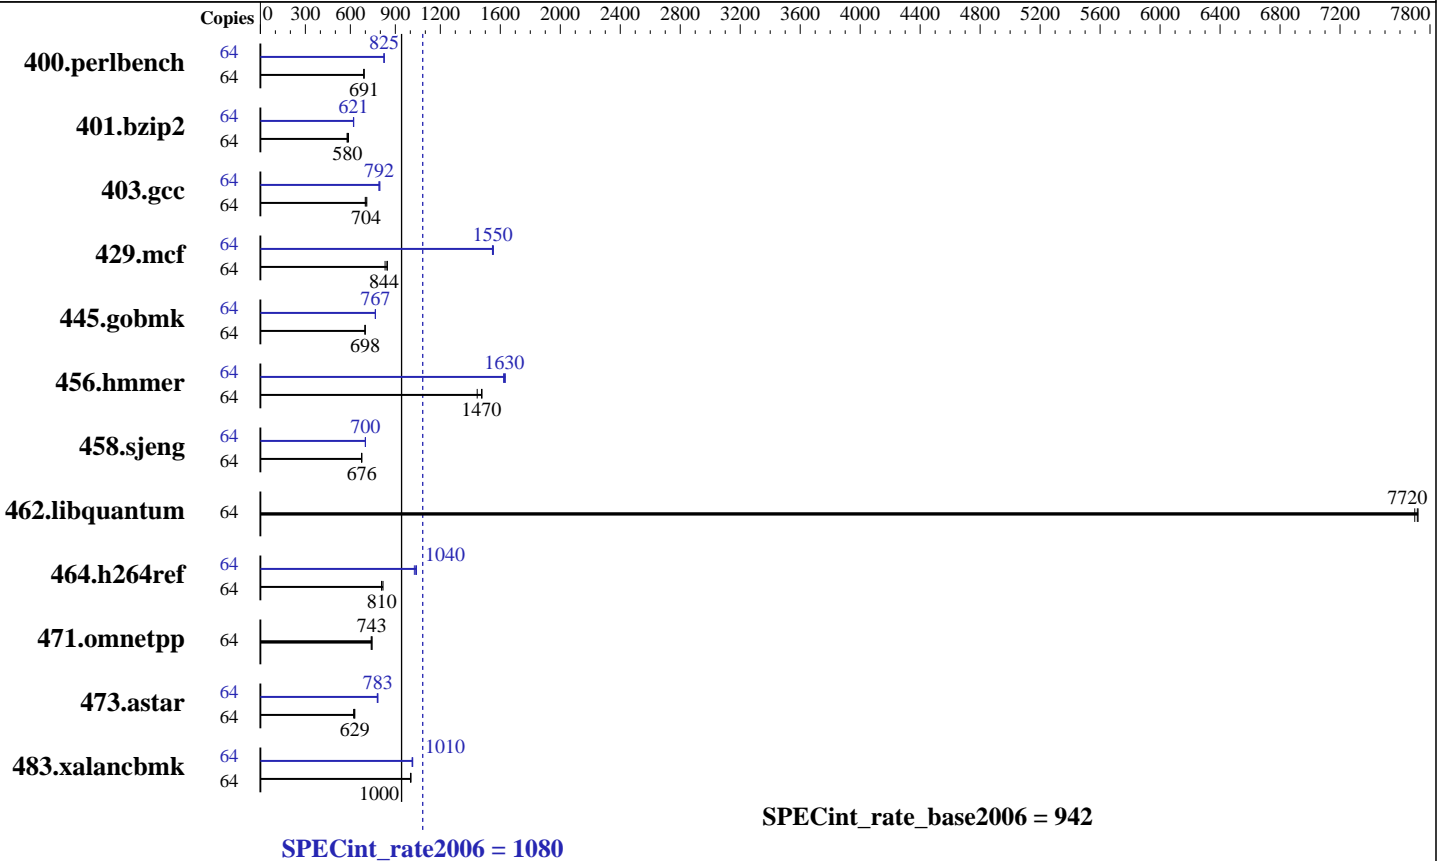

Hardware

CPU Name: AMD Opteron 6378
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5,
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64
 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1080

ProLiant DL585 G7
(2.40 GHZ AMD Opteron 6378)

SPECint_rate_base2006 = 942

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2014
Hardware Availability: Nov-2012
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	904	691	904	692	907	689	64	758	825	757	826	758	824
401.bzip2	64	1065	580	1051	588	1067	579	64	992	623	995	621	995	621
403.gcc	64	737	699	726	710	731	704	64	651	792	651	792	646	797
429.mcf	64	702	832	689	847	692	844	64	377	1550	376	1550	377	1550
445.gobmk	64	961	698	962	698	961	699	64	875	767	875	767	876	767
456.hammer	64	413	1450	404	1480	405	1470	64	367	1630	368	1620	366	1630
458.sjeng	64	1145	676	1147	675	1146	676	64	1106	700	1105	701	1106	700
462.libquantum	64	172	7720	172	7700	172	7720	64	172	7720	172	7700	172	7720
464.h264ref	64	1732	818	1753	808	1749	810	64	1379	1030	1367	1040	1360	1040
471.omnetpp	64	541	739	537	744	538	743	64	541	739	537	744	538	743
473.astar	64	723	622	714	629	714	629	64	576	780	574	783	574	783
483.xalancbmk	64	440	1000	441	1000	440	1000	64	436	1010	436	1010	435	1020

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS Configuration:
HP Power Profile set to Maximum Performance
AMD-VI (IOMMU) set to Enabled
Minimum Processor Idle Power State set to C1E State (AMD C1 Clock Ramping)
Thermal Configuration set to Increased Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1080

ProLiant DL585 G7
(2.40 GHZ AMD Opteron 6378)

SPECint_rate_base2006 = 942

CPU2006 license: 3

Test date: Jun-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/cpu2006/amd1206-rate-libs-revA/32:/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbenc: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1080

ProLiant DL585 G7
(2.40 GHZ AMD Opteron 6378)

SPECint_rate_base2006 = 942

CPU2006 license: 3

Test date: Jun-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1080

ProLiant DL585 G7
(2.40 GHZ AMD Opteron 6378)

SPECint_rate_base2006 = 942

CPU2006 license: 3

Test date: Jun-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

445.gobmk (continued):

-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmr: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: basepeak = yes

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3

-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512

-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-revC.html>

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-revC.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1080

ProLiant DL585 G7
(2.40 GHZ AMD Opteron 6378)

SPECint_rate_base2006 = 942

CPU2006 license: 3

Test date: Jun-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2012

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 30 10:53:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.